




Life Safety
Made Simple

Three Year Dry Sprinkler System / Pre-action Sprinkler System Full Trip NFPA 25 13.4

- Sales
- Estimating
- Design
- Installation
- Inspections
- 24 Hour Emergency Service & Repair
- Fire Alarm
- Monitoring
- Security
- Fire Sprinkler & Suppression Systems

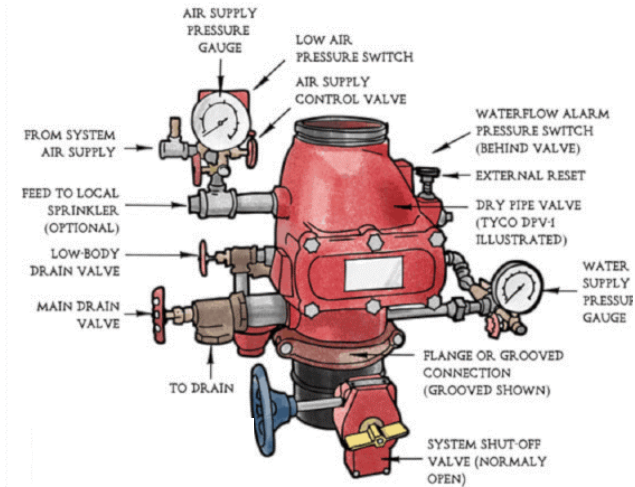

Dry Valve System



Preaction Alarm Valve

A requirement of NFPA 25, 14.2 (the standard for fire sprinkler inspections) is that every three years you are also required to do the following:

- Every Three Years and whenever the system is altered, The Dry Pipe Valve or Pre-action Valve Shall be trip tested with the valve fully open and the quick opening device, if provided, in service.
- The time required for water to pass through the Inspectors Test shall be measured and recorded.
- The System shall be left with pressurized water long enough for leaks (if any) to be determined..
- All Low Points in the system shall be drained.

Brothers Fire & Security can provide you all necessary labor and materials to perform this inspection for you. Contact one of our sales reps today.