

GAME CHANGING THERMAL CAMERA

HIGH RESOLUTION AT AN AFFORDABLE PRICE

Featuring a wide temperature range from -20 °C to 550 °C (-4 °F to 1022 °F), the T-Cam 600 is useful for electrical and HVAC inspections, automotive maintenance, and security surveillance. Enable the center/hot/cold spot temperature points and alarming features to assist in detecting critical failures. Interval photography allows inspectors to capture images for a programmed duration and frequency. Stream media to a PC using the USB Type-C connector. The T-Cam 600 has reliable performance and can be used to troubleshoot repairs and monitor processes to ensure machinery and systems are functioning safely and at peak efficiency.




T-Cam 600 P-Series



RUGGED AND BUILT-TO-LAST

Rated IP54 to protect against dirt, dust, and other non-corrosive materials. 2 m (6.56') drop-rating to withstand the rigors of tough inspections. Each T-Cam 600 is shipped with two rechargeable, replaceable 4500 mAh batteries and a charging dock to meet the requirements of heavy daily use. Power management is built-in to save battery life.

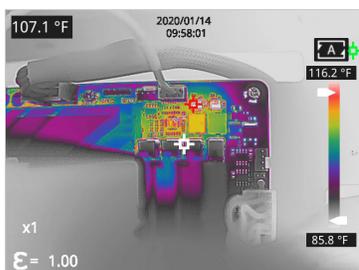

HI-RES THERMAL IMAGES

Provides 640 x 512 high resolution thermal images. Captures visible images with 5 MP digital camera. Features manual adjustment for clear and precise focus. Features 5 image modes: detail enhancement, picture-in-picture, visible, infrared and ICI Dual Vision for situational awareness and target location. 10 color palettes to enhance viewing and easily find hot spots. Save images to the provided MicroSD card.



EASY TO USE

Quick start instruction guide provided. No additional training required. One-handed, 5-button easy operation for fast inspections. Use handheld or on a tripod. Features a 3.5" LCD high definition (640 x 480) capacitive touch screen with adjustable screen brightness for on the spot analysis. Also utilize the Type-C connector to plug-and-play streaming to an external device.



The T-Cam 600 handheld thermal camera provides high temperature measuring from -20 °C to 550 °C (-4 °F to 1022 °F) and an accuracy of $\pm 2^{\circ}\text{C}$ ($\pm 3.6^{\circ}\text{F}$) or $\pm 2\%$. Manual focus provides clear 640 x 512 images to meet research and field requirements. Perfect for one-hand inspection by engineers and electrical thermographers who need to perform analysis on-the-go. Stream media to a PC using the USB Type-C connector.

Features

- Touchscreen, 3.5" color LCD
- Central spot, hot spot and cold spot tracing
- Customized point/line/area temperature analysis
- Click-and-drag temperature measurement
- Single-handed operation with 5-button design
- High-temperature measuring
- Alarm threshold settings
- Automatic/manual file naming
- 2 m (6.56') drop protection
- Power management
- Voice annotation
- Bluetooth support
- Small size
- Light weight

Applications

- Electrical poles
- Electrical inspections
- Process control
- Plant/General maintenance
- Industrial vision systems
- Transportation/Automotive
- HVAC/AC
- Home/building Inspections
- Building automation

Accessories

- USB Cable
- 32 GB Micro-SD card
- Charging dock
- 2 batteries
- Microphone with noise cancellation (built-in)
- 1/4"-20 tripod support (built-in)

Specifications

- **Pixel Resolution:** 640 x 512
- **Accuracy:** $\pm 2^{\circ}\text{C}$ ($\pm 3.6^{\circ}\text{F}$) or $\pm 2\%$
- **Temperature Range:** -20 °C to 550 °C (-4 °F to 1022 °F)
- **Operation Range:** -10 °C to 50 °C (14 °F to 122 °F)
- **Storage Range:** -20 °C to 60 °C (-4 °F to 140 °F)
- **Detector Array:** FPA (VOx)
- **Pixel Pitch:** 12 μm
- **FOV:** 48° x 38°
- **I FOV:** 1.31 mrad
- **Focal Length:** 9.1 mm
- **Focus:** manual
- **Spectral Band:** 8 μm to 14 μm
- **Thermal Sensitivity (NETD):**
< (35 mK) 0.035 °C at 30 °C (86°F)
- **Frame Rate:** 30 Hz
- **Humidity:** 10% to 95% non-condensing
- **Pixel Operability:** > 99 %
- **Drop Rating:** 2 m (6.56')
- **Shock/Vibration:** 25 G/2.5 G
- **Dimensions (without lens):**
256.4 mm x 105.1 mm x 105.3 mm (L x W x D ± 0.5 mm)
(10.09" x 4.14" x 4.15" (L x W x H ± 0.02 "))
- **Weight (without lens):** 670 g (1.48 lbs)
- **Power:** 5V DC 2A
- **Battery:** Li-ion, rechargeable/replaceable
- **Operation/Charging Time:** 3 hours/3 hours
- **Power Management:** adjustable
- **Interface:** USB Type-C, Micro SD
- **Video Format:** H.264 (without data)
- **Image Format:** IR JPG (with data) + visible JPG
- **Image Polarity:** 10 options
- **Image Modes:** IR, fusion (ICI Dual Vision), visible, picture-in-picture
- **Memory:** MicroSD card (up to 64 GB)
- **Screen:** 3.5" color LCD touch screen, 640 x 480
- **Brightness:** adjustable
- **Digital Camera:** 5 MP
- **Zoom:** 2x, 4x, 8x
- **Emissivity Correction:** 0.01 to 1.0
- **Measurement Units:** °C, °F, °K
- **IP Rating:** IP54
- **Laser:** Class II 650 nm, < 1 mW
- **Language:** multi-language
- Automatic alarms
- Alarm snapshot (duration and frequency)
- Interval photography (duration and frequency)
- Internal non-uniformity correction (NUC)
- Voice Annotation
- Bluetooth support