

## FT SERIES

- DELUXE KITS 15 - 60 TONS
- ECONOMY SETS 15 - 200 TONS

Everything required to make heavy moves up to 200 tons is included in **Hilman's** Deluxe Kits and Economy Sets! Both include four swivel locking **Hilman Rollers** with either padded or diamond steel tops and two steering handles. Four preload pads are also included with rollers having the SLD style top. Sets contain full length steering handles. Kits contain knock down handles that fit into a sturdy storage case. Kit cases are lockable and have lifting grips for easy handling, providing protection from exposure and theft. Each kit or set provides the necessary gear to tackle a moving project up to that respective capacity.



Deluxe FT Kit




Economy FT Set

### INDIVIDUAL ROLLERS 3.75 - 50 TONS

With six capacities, two moving types (rigid and swivel locking) and three top styles (padded, diamond steel and smooth steel), there's a model perfect for almost every heavy moving applications in this **Hilman Rollers** series! For straight line moves, specify the rigid roller. For turns, even in the tightest of corners, use the swivel locking rollers. The swivel-locking type combines swivel and rigid designs with spring loaded locks that can engage every 45 degrees. Steering handles are available for Swivel Lock types in 3 lengths. H36F (36" / 914 mm), H48" (48" / 1219 mm) and H60F (60" / 1524 mm).

FT Series **Hilman Rollers** have three versatile top plates. "D" tops have a spike-like steel grid able to grip into wood and provide a secure move for crated or palletized equipment. "P" tops, with built-in neoprene pad, allow some compression and provide a non-slip surface, a versatile choice for moving on less than perfect floors or for moving metal based machines. "S" tops have smooth steel top, ideal for mounting the rollers to equipment or as a base unit for a variety of top modifications.

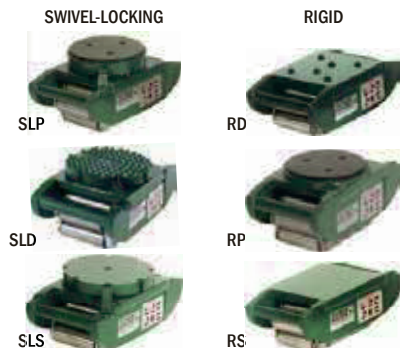

KIT / SET CAPACITY (TONS)	KIT / SET PRODUCT NUMBER	KIT / SET INCLUDES (All KITS include steel cases) Kit Box KD-D2: 27.75" (705mm) x 14.75" (375mm) x 9.63" (245mm)	WEIGHT lb.	kg.
15	KRS-15-SLP	(4) 3.75-SLP Rollers; (2) KDH48F Handles	203	92
15	RS-15-SLP	(4) 3.75-SLP Rollers; (2) H36F 36" Handles	156	71
15	KRS-15-SLD	(4) 3.75-SLD Rollers; (4) P-1 Preload Pads; (2) KDH48F Handles	203	92
15	RS-15-SLD	(4) 3.75-SLD Rollers; (4) P-1 Preload Pads; (2) H36F 36" Handles	156	71
30	KRS-30-SLP	(4) 7.5-SLP Rollers; (2) KDH48F Handles	215	98
30	RS-30-SLP	(4) 7.5-SLP Rollers; (2) H48F 48" Handles	172	78
30	KRS-30-SLD	(4) 7.5-SLD Rollers; (4) P-1 Preload Pads; (2) KDH48F Handles	215	98
30	RS-30-SLD	(4) 7.5-SLD Rollers; (4) P-1 Preload Pads; (2) H48F 48" Handles	172	78
40	KRS-40-SLP	(4) 10-SLP Rollers; (2) KDH48F Kit Size Handles	219	99
40	RS-40-SLP	(4) 10-SLP Rollers; (2) H48F 48" Handles	176	80
40	KRS-40-SLD	(4) 10-SLD Rollers; (4) P-1 Preload Pads; (2) KDH48F Handles	219	99
40	RS-40-SLD	(4) 10-SLD Rollers; (4) P-1 Preload Pads; (2) H48F 48" Handles	176	80
60	KRS-60-SLP	(4) 15-SLP Rollers; (2) KDH48F Kit Size Handles	255	116
60	RS-60-SLP	(4) 15-SLP Rollers; (2) H48F 48" Handles	212	96
60	KRS-60-SLD	(4) 15-SLD Rollers; (4) P-1 Preload Pads; (2) KDH48F Handles	259	117
60	RS-60-SLD	(4) 15-SLD Rollers; (4) P-1 Preload Pads; (2) H48F 48" Handles	216	98
120	RS-120-SLP	(4) 30-SLP Rollers; (2) H60F 60" Handles	542	256
120	RS-120-SLD	(4) 30-SLD Rollers; (4) P-2 Preload Pads; (2) H60F 60" Handles	540	245
200	RS-200-SLP	(4) 50-SLP Rollers; (2) H60F 60" Handles	834	378
200	RS-200-SLD	(4) 50-SLD Rollers; (4) P-2 Preload Pads; (2) H60F 60" Handles	848	385

CAPACITY (TONS)	PRODUCT NUMBER	TOP STYLE	HEIGHT		WIDTH		LENGTH		WEIGHT		CONTACT ROLLS
			in	mm	in	mm	in	mm	lb	kg	
3.75*	3.75-SLP		5	127	5-3/4	146	10-1/2	267	34	15	5
7.5*	7.5-SLP	SWIVEL	5-1/4	133	5-3/4	146	10-1/2	267	38	17	5
10*	10-SLP	LOCKING	5-1/4	133	5-3/4	146	10-1/2	267	38	17	5
15	15-SLP	PADDED	5-1/8	130	6-3/8	162	12-3/4	324	49	22	6
30*	30-SLP		8	203	8	203	15	381	122	55	6
50*	50-SLP		8-15/16	227	8	203	21	533	193	88	7
3.75*	3.75-SLD	SWIVEL	4-3/4	121	5-3/4	146	10-1/2	267	34	15	5
7.5*	7.5-SLD	LOCKING	5	127	5-3/4	146	10-1/2	267	37	17	5
10*	10-SLD	WITH	5	127	5-3/4	146	10-1/2	267	37	17	5
15	15-SLD	DIAMOND	4-7/8	124	6-3/8	162	12-3/4	324	49	22	6
30	30-SLD	STEEL	7-1/32	179	8	203	15	381	118	54	6
50	50-SLD	GRID	8-1/16	205	8	203	21	533	189	86	7
3.75*	3.75-SLS		4-5/8	117	6	152	10-1/2	267	35	16	5
7.5*	7.5-SLS	SWIVEL	4-7/8	124	6	152	10-1/2	267	38	17	5
10*	10-SLS	LOCKING	4-7/8	124	6	152	10-1/2	267	38	17	5
15	15-SLS	WITH	4-3/4	121	6-3/8	162	12-3/4	324	50	23	6
30	30-SLS	SMOOTH	7-15/16	202	8	203	15	381	119	54	6
50	50-SLS	STEEL	7-15/16	202	8	203	20-7/8	530	191	87	7
3.75*	3.75-RP		4-3/16	106	5-3/4	146	10-1/2	267	29	13	5
7.5*	7.5-RP		4-7/16	113	5-3/4	146	10-1/2	267	33	15	5
10*	10-RP	RIGID	4-7/16	113	5-3/4	146	10-1/2	267	33	15	5
15	15-RP	PADDED	4-5/16	110	6-3/8	162	12-3/4	324	42	19	6
30*	30-RP		6-3/4	171	8	203	15	381	107	49	6
50*	50-RP		7-3/4	197	8	203	21	533	179	81	7
3.75*	3.75-RD		4-1/16**	103	5-5/8	143	10-1/2	267	29	13	5
7.5*	7.5-RD	RIGID	4-5/16**	110	5-5/8	143	10-1/2	267	32	15	5
10*	10-RD	WITH	4-5/16**	110	5-3/4	146	10-1/2	267	32	15	5
15	15-RD	DIAMOND	4-3/32**	104	6-3/8	162	12-3/4	324	38	17	6
30*	30-RD	STEEL	6-1/8**	156	8	203	15	381	105	48	6
50*	50-RD	GRID	7-1/8**	181	8	203	21	533	176	80	7
3.75*	3.75-RS		3-11/16	94	5-5/8	143	10-1/2	267	29	13	5
7.5*	7.5-RS	RIGID	3-15/16	100	5-5/8	143	10-1/2	267	32	15	5
10*	10-RS	WITH	3-15/16	100	5-5/8	143	10-1/2	267	32	15	5
15	15-RS	SMOOTH	3-13/16	97	6-3/8	162	12-3/4	324	43	20	6
30*	30-RS	STEEL	5-3/4	146	8	203	15	381	105	48	6
50*	50-RS		6-3/4	171	8	203	21	533	176	80	7

\* Width dimension of top exceeds roller frame width

\*\* Height to top of spike