




## ERS SERIES

- DELUXE KITS 15 - 50 TONS
- ECONOMY SETS 15 - 400 TONS

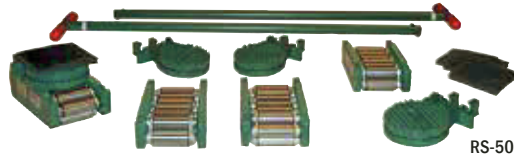

RS-50-ERSD

With or without a kit case, these prepackaged Kits or Sets are the value leaders of the **Hilman Roller** line. Economy Sets, without kit boxes, are available in capacities from 15 to 400 tons. **Hilman's** Deluxe Kits and Economy Sets contain four basic ERS Rollers, which can be used as is for straight line moving. Four swivel locking attachments with diamond steel tops are included, along with four preload pads and two steering handles. Handles in the Sets vary in length according to the capacity of the rollers; Kit handles are a two piece knockdown style to fit into the steel case. All the deluxe gear necessary for your important project is provided.

KIT/SET CAPACITY (TONS)	KIT AND SET PRODUCT NUMBER	KIT / SET INCLUDES (ALL KITS Include Steel Cases)	WEIGHT lb	kg
15	KRS-15-ERSD	(4) 3.75-ERS Rollers	181	82
15	RS-15-ERSD	(4) T-3.75-LD Swivel Locking Diamond Attachments (4) P-1 Preload Pads (2) KDH48E Kit Size Handles in Kit Or (2) H36E 36" Handles in Set	130	59
20	KRS-20-ERSD	(4) 5-ERS Rollers	201	91
20	RS-20-ERSD	(4) T-5-LD Swivel Locking Diamond Attachments (4) P-1 Preload Pads (2) KDH48E Kit Size Handle in Kit Or (2) H36E 36" Handles in Set	150	68
40	KRS-40-ERSD	(4) 10-ERS Rollers	241	109
40	RS-40-ERSD	(4) T-10-LD Swivel Locking Diamond Attachments (4) P-1 Preload Pads (2) KDH48E Kit Size Handles in Kit Or (2) H48E 48" Handles in Set	196	89
50	KRS-50-ERSD	(4) 12.5-ERS Rollers	249	113
50	RS-50-ERSD	(4) T-12.5-LD Swivel Locking Diamond Attachments (4) P-1 Preload Pads (2) KDH48E Kit Size Handles in Kit Or (2) H48E 48" Handles in Set	204	93
100	Kit Not Available RS-100-ERSD	(4) 25-ERS Rollers (4) T-25-LD Swivel Locking Diamond Attachments (4) P-2 Preload Pads (2) H48E 48" Handles in Set	514	233
260	Kit Not Available RS-260-ERSD	(4) 65-ERS Rollers (4) T-65-LD Swivel Locking Diamond Attachments (4) P-2 Preload Pads (2) H60E 60" Handles in Set	870	395
400	Kit Not Available RS-400-ERSD	(4) 100-ERS Rollers (4) T-100-LD Swivel Locking Diamond Attachments (4) P-2 Preload Pads (2) H60E 60" Handles in Set	906	411



KRS-50-ERSD

### INDIVIDUAL ROLLERS 3.75 - 100 TONS

**Hilman's ERS** rollers are the lowest profile high capacity rollers in the world! Utilizing the endless chain concept, the basic individual ERS Roller is designed for straight line motion, yet each can be outfitted with a removable swivel attachment for turning and positioning. Seven capacities are available.



ERS

CAP (TONS)	PRODUCT NUMBER	HEIGHT		WIDTH		LENGTH		WEIGHT lb	WEIGHT kg	CONTACT ROLLS
		in	mm	in	mm	in	mm			
3.75	3.75-ERS	2 - 3/4	70	4 - 7/16	113	8 - 5/8	219	15	7	6
5	5-ERS	2 - 3/4	70	5 - 5/16	135	8 - 5/8	219	20	9	5
10	10-ERS	3 - 3/8	86	5 - 3/16	132	10 - 3/8	264	29	13	5
12.5	12.5-ERS	3 - 3/8	86	5 - 5/8	143	10 - 3/8	264	31	14	5
25	25-ERS	4 - 3/4	121	7 - 1/4	184	15 - 3/4	400	79	36	5
65	65-ERS	5 - 5/8	143	7 - 3/8	187	23	584	156	71	7
100	100-ERS	5 - 5/8	143	7 - 7/8	200	23	584	165	75	7

### SWIVEL ATTACHMENTS

For the ultimate versatility, each **Hilman ERS** Series Roller can be outfitted with an ERS Swivel Attachment. Attachments add minimal height to the basic roller, while providing ability to make turns without jacking the equipment. Featuring chrome steel ball bearings for smooth operation, attachments come with diamond steel or padded tops and swivel locking devices. Padded attachments help minimize metal-to-metal slippage. Height Equalizers, which increase the height of the roller to that of a roller without swivel attachment, are also available for each roller size.



T-3.75-LP

T-3.75-LD

PRODUCT NUMBERS SWIVEL LOCKING DIAMOND GRIP TOP	SWIVEL LOCKING PADDED TOP	FITS INDIVIDUAL ROLLER PRODUCT NUMBER	* ATTACHMENT PLUS ROLLER				ATTACHMENT				WEIGHT	
			PADDED (P) STYLE HEIGHT *		DIAMOND (D) STYLE HEIGHT *		WIDTH		LENGTH *		lb	kg
			in	mm	in	mm	in	mm	in	mm		
T-3.75-LD	T-3.75-LP	3.75-ERS	4 - 11/16	119	4 - 7/16	113	5 - 7/8	149	10 - 3/4	273	13	6
T-5-LD	T-5-LP	5-ERS	4 - 11/16	119	4 - 7/16	113	5 - 7/8	149	10 - 3/4	273	13	6
T-10-LD	T-10-LP	10-ERS	5 - 5/16	135	5 - 1/16	129	5 - 7/8	149	12 - 1/2	318	14	6
T-12.5-LD	T-12.5-LP	12.5-ERS	5 - 5/16	135	5 - 1/16	129	5 - 7/8	149	12 - 1/2	318	14	6
T-25-LD	T-25-LP	25-ERS	7 - 15/16	202	7 - 1/16	179	8	203	18 - 19/32	472	42	19
T-65-LD	T-65-LP	65-ERS	8 - 13/16	224	7 - 15/16	202	8 - 3/8	213	25 - 3/8	645	47	21
T-100-LD	T-100-LP	100-ERS	8 - 13/16	224	7 - 15/16	202	8 - 3/8	213	25 - 3/8	645	47	21