

## STEP ONE

Choose your G-209R shackle size.

## STEP TWO

Choose your handle option.  
-“F” Handle (G4209F)  
-“D” Handle (G4209R)

## STEP THREE

Reference both the shackle and handle part numbers when placing an order for the shackle assembly.

**Load Rated**





### G-209R ROV SHACKLES WITH “D” OR “F” STYLE HANDLE



G-209R with “D” Style Handle Shown

- Capacities from 8-1/2t through 55t.
- Forged Steel, Quenched & Tempered, with alloy pins.
- Handles are stainless steel.
- Shackles and bolts are available in both “D” and “F” designs.
- Working Load Limit permanently shown on every shackle.
- QUIC-CHECK® deformation and angle indicators forged on the bow.
- All ROV shackle bows are galvanized, then painted fluorescent yellow.
- Handles are painted fluorescent orange.
- New Interchangeable handles on ROV shackle bolts.
- “D” and “F” handle kits available containing handle, retaining bolts and individual packet of Loctite® for easy installation.
- Handles as RFID equipped.
- Look for the Red Pin® . . . the mark of genuine Crosby quality.

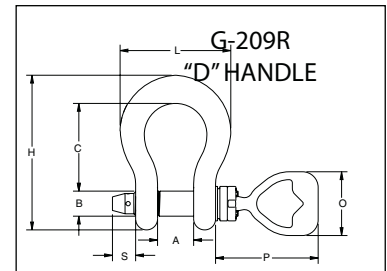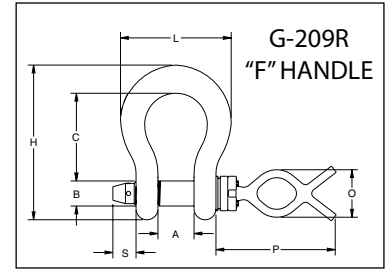

### G209R ROV Shackles

Working Load Limit (t)*	G-209R Stock No.	G-209R with “F” Style Handle Dimensions (in.)											G-209R with “D” Style Handle Dimensions (in.)										
		Weight Each (lbs.)	A +/- .25	B	C	H	L	O	P	S	T	Weight Each (lbs.)	A +/- .25	B	C	H	L	O	P	S	T		
8-1/2	1020902	7.7	1.69	1.13	3.75	6.56	4.69	3.79	8.66	1.23	0.63	8.3	1.69	1.13	3.75	6.56	4.69	5.09	7.25	1.23	0.63		
9-1/2	1020932	9.8	1.81	1.25	4.25	7.47	5.16	3.79	8.66	1.23	0.63	10.4	1.81	1.25	4.25	7.47	5.16	5.09	7.25	1.23	0.63		
12	1020952	12.4	2.03	1.38	4.69	8.25	5.75	3.79	8.66	1.30	0.63	12.9	2.03	1.38	4.69	8.25	5.75	5.09	7.25	1.30	0.63		
13-1/2	1020972	15.6	2.25	1.50	5.25	9.16	6.38	3.79	8.66	1.40	0.63	16.2	2.25	1.50	5.25	9.16	6.38	5.09	7.25	1.40	0.63		
17	1020992	18.5	2.38	1.63	5.75	10.00	6.88	3.79	9.60	1.79	0.63	19.1	2.38	1.63	5.75	10.00	6.88	5.09	8.19	1.79	0.63		
25	1021102	34.1	2.88	2.00	7.00	12.34	8.80	3.79	9.60	1.85	0.63	34.7	2.88	2.00	7.00	12.34	8.80	5.09	8.19	1.85	0.63		
35	1021125	48.5	3.25	2.25	7.75	13.68	10.15	3.79	9.78	1.94	0.63	49.1	3.25	2.25	7.75	13.68	10.15	5.09	8.37	1.94	0.63		
55	1021158	95.2	4.13	2.75	10.50	17.90	12.74	3.79	10.16	2.06	0.63	95.8	4.13	2.75	10.50	17.90	12.74	5.09	8.75	2.06	0.63		

\* Minimum Ultimate Load is 5 times the Working Load Limit.

G-209 Shackle Working Load Limit (t)*	Retrofit existing ROV Shackles with the “Bolt Assembly.”		Handle Only	
	“F” Style Bolt Assembly (G4209RFB)	“D” Style Bolt Assembly (G4209RDB)	“F” Style Handle Only (G4209F)	“D” Style Handle Only (G4209R)
8-1/2	1020638	1020816	1021085	1021094
9-1/2	1020647	1020825		
12	1020656	1020834		
13-1/2	1020665	1020843		
17	1020674	1020852		
25	1020683	1020861		
35	1020692	1020870		
55	1020709	1020889		

