


# Loadshackle



## Features and benefits:

- Robust construction
- Compact size and low headroom
- Every Loadshackle proof tested
- Lightweight
- Unrivalled resolution
- Push button tare
- Environmentally sealed to IP67 or NEMA6
- Peak hold
- Advanced options available for subsea applications
- Manufactured using industry leading brand shackles
- mv/v or analog signal options
- Design validated by F.E.A.

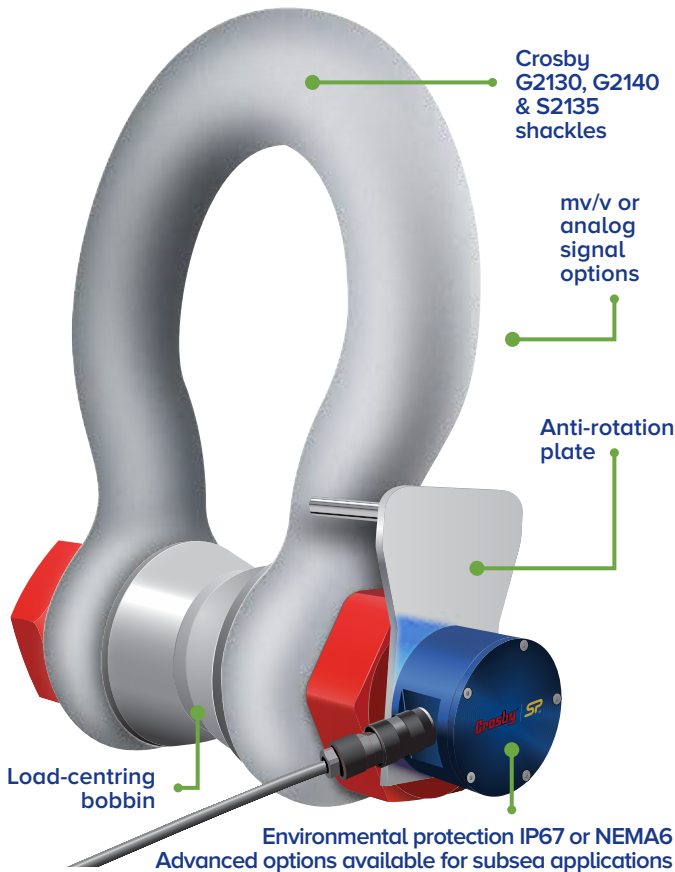

Requires connection to Crosby|Straightpoint's Handheld plus (HHP) or External Amplifier range (SA-3420) that can be configured to provide outputs such as 4-20mA, 0-10v, 0-5v for PLC or data logger integration.

**Straightpoint's Loadshackle is available from stock in capacities of 3.25t to 400t, as well as being obtainable up to 3000t.**

**Manufactured from Crosby's industry-leading 2130 Carbon and 2140 Alloy Bolt Type Anchor Shackle, the product offers reduced overall weight and headroom, providing a great fit for low headroom applications.**

Utilising the same advanced microprocessor based electronics as all Straightpoint products, the cabled Loadshackle benefits from high sampling rates, extreme resistance to industrial level noise and unprecedented stability.


A huge range of tooling allows Straightpoint to calibrate in shackle for extra accuracy, unlike many other load cell manufacturers. Their cabled Loadshackles are also

environmentally sealed to IP67 or NEMA6 and, as an option, sealed for permanent submersion for sub-sea use.

The cabled Loadshackle range can be used with digital displays, including the Straightpoint Handheld plus, PLCs, data acquisition systems (DAQ), etc.

They are configured with a vast array of output formats to include mV/V, RS-422, RS-485, utilising the ASCII, MODBUS RTU and CAN-BUS protocols or supplied with integral amplifier allowing analogue outputs such as 4-20mA, 0-10v, 0-5v etc.

Whether used in heavy lifting, mooring anchor placement or sub-sea applications, Straightpoint's cabled Loadshackle offers robust construction, advanced electronics, industry leading resolution and accuracy - all at a cost-effective, affordable price.

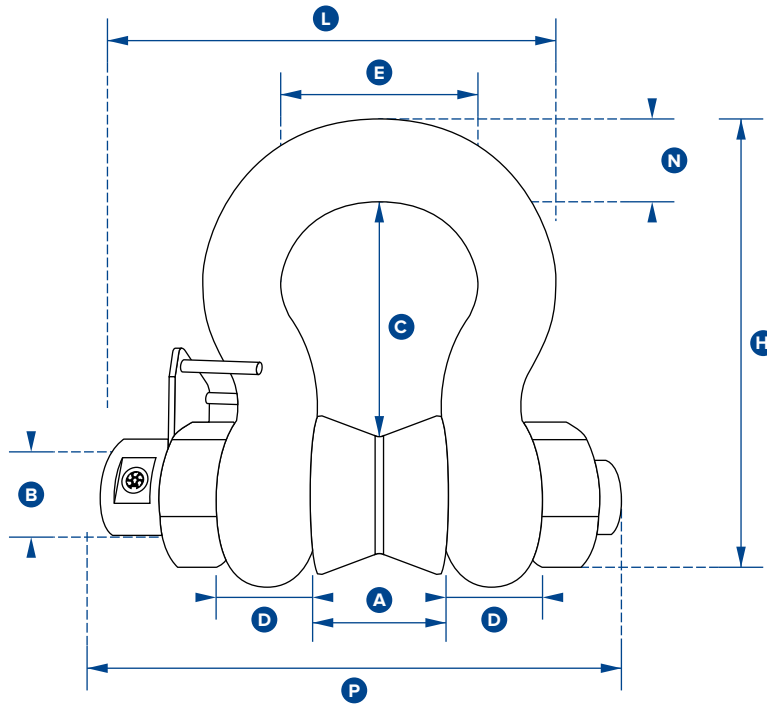

Part Numbers											
SP	SLB3.25T	SLB6.5T	SLB12T	SLB25T	SLB55T	SLB85T	SLB120T	SLB200T	SLB300T	SLB400T	
Crosby	2789106	2789111	2789103	2789105	2789110	2789112	2789102	2789104	2789107	2789108	
Capacity	3.25te	6.5te	12te	25te	55te	85te	120te	200te	300te	400te	
	7150lb	14300lb	26400lb	55000lb	120000lbs	185000lbs	260000lbs	440000lbs	660000lbs	880000lbs	
Resolution	0.005te	0.005te	0.01te	0.02te	0.05te	0.05te	0.1te	0.2te	0.5te	0.5te	
	10lb	10lb	20lb	50lb	100lb	100lb	200lb	200lb	1000lb	1000lb	
Units	tonne										
	lb										
Weight	2.8kg	3.2kg	8kg	18kg	25kg	45kg	85kg	260kg	405kg	662kg	
	6.16lb	7lb	17.6lb	40lb	55lb	99lb	187lb	573lb	893lb	1459lb	
Safety Factor	5:1 when used with load bobbin										
Operating Temp	-10°C to +50°C or 14°F to 122°F										
Accuracy	±1% of full scale										
Protection	IP67 std [or sub sea as POA option] or NEMA6										
Dimension A	26.9	36.6	51.5	73	82.5	105	127	180	205	230	
	1.06"	1.44"	2.03"	2.87"	3.25"	4.13"	5.00"	7.09"	8.07"	9.06"	
Dimension ØB	19.1	25.4	35.1	51	57	70	82.5	125	150	175	
	0.75"	1.00"	1.38"	2.01"	2.24"	2.76"	3.25"	4.92"	5.91"	6.89"	
Dimension C	56.9	79.7	113	170	189.5	253	319.5	432.2	505	547.7	
	2.24"	3.14"	4.45"	6.69"	7.46"	9.96"	12.58"	17.02"	19.88"	21.56"	
Dimension D	14.46	22.4	31.8	44.5	51	66.5	76	110	120	160	
	0.57"	0.88"	1.25"	1.75"	2.01"	2.62"	2.99"	4.33"	4.72"	6.30"	
Dimension E	42.9	58	82.5	127	164	184	200	280	305	325	
	1.69"	2.28"	3.25"	5.00"	6.46"	7.24"	7.87"	11.02"	12.01"	12.80"	
Dimension H	103.3	148	210	313	348	453	546	738	862	962.6	
	4.07"	5.83"	8.27"	12.32"	13.70"	17.83"	21.50"	29.06"	33.94"	37.90"	
Dimension L	124.2	153.5	193.8	278	303	365	405	519.7	576.7	657.2	
	4.89"	6.04"	7.63"	10.94"	11.93"	14.37"	15.94"	20.46"	22.7"	25.87"	
Dimension N	17.5	24.6	35.1	57	61	79	92	120	140	160	
	0.69"	0.97"	1.38"	2.24"	2.40"	3.11"	3.62"	4.72"	5.51"	6.30"	
Dimension P	140	170	215	290	314	391	438	590	647	755	
	5.51"	6.69"	8.46"	11.42"	12.36"	15.39"	17.24"	23.23"	25.47"	29.72"	
Crosby Shackle	G2130				G2140			S2135			