




TRAYFECTA® G *Series*

G Series Former

Forms shelf-ready cases, club store stackable trays, and economical shippers


TRAYFECTA® G *Series*

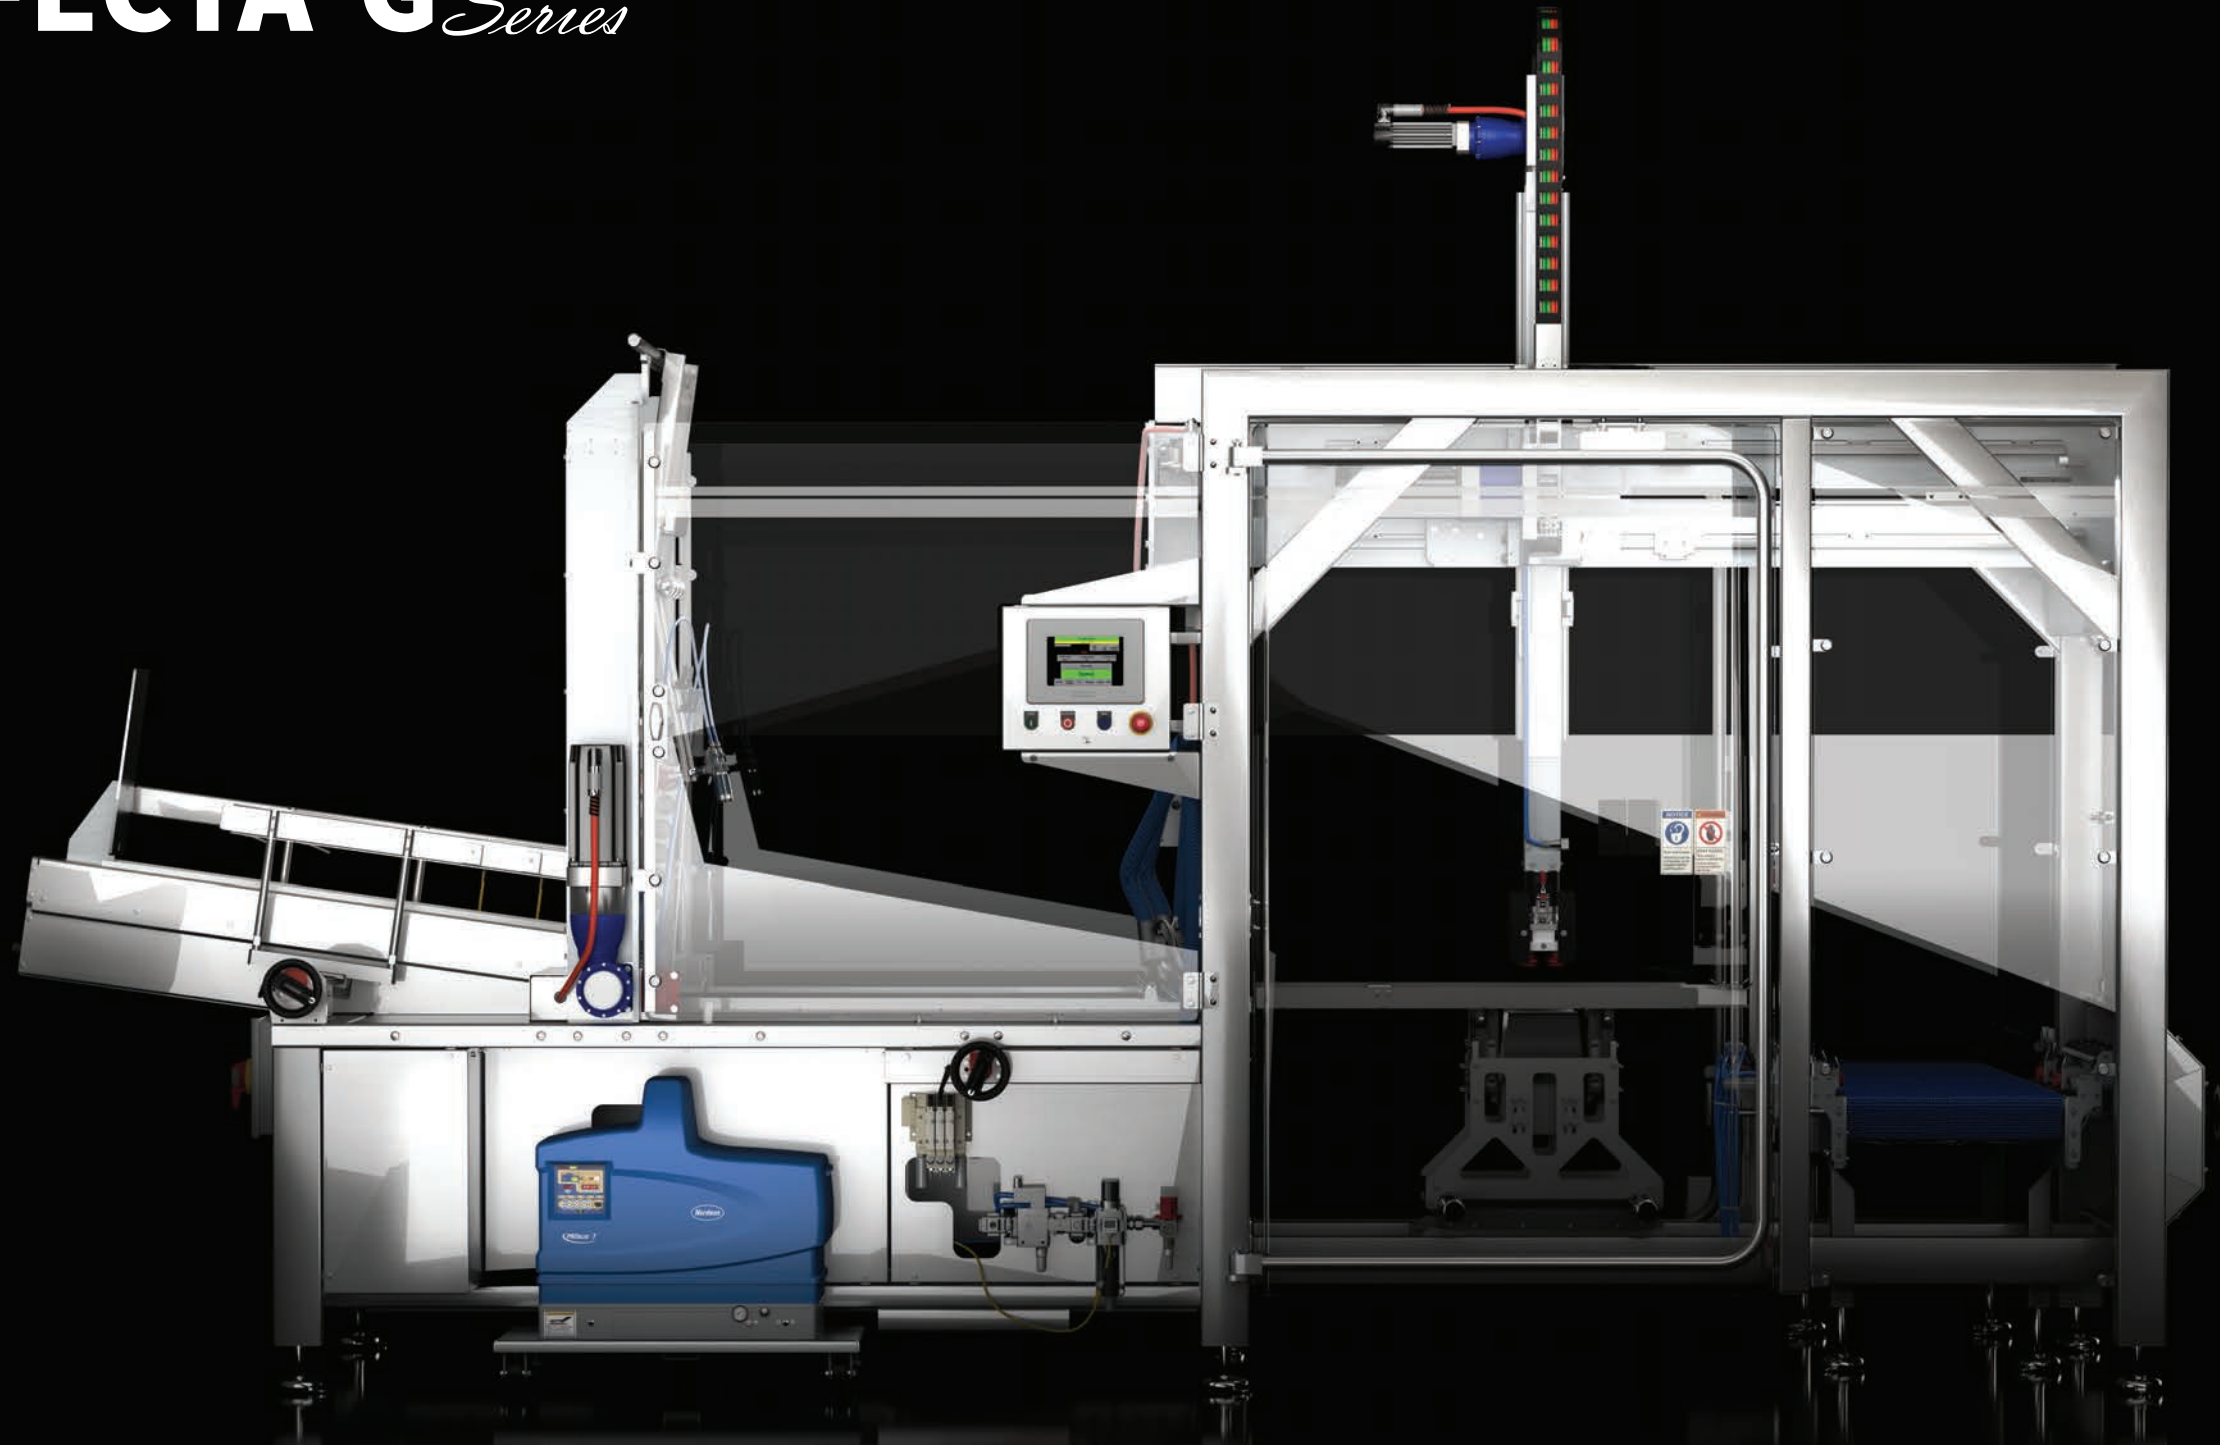

FEATURES



Ergonomic
Operation



Precision Handoff
w/Optional Rotate




Maximum Finished
Case Size




Ergonomic Tool
Change Cart Option




Forms Thin Paperboard
up to Double Walled
Corrugated Material




Cabrio Case® SRP



Shelf-Ready Cases

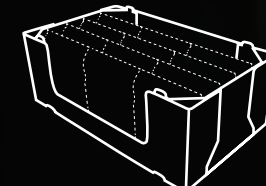

Club Store Stackable
Trays



Economical Shippers



Speeds up to 35/min

TRAYFECTA® G Series



KEY FEATURES

Ergonomic Low Elevation Magazine
Quick-Change, Light-Weight Tooling
Forms Shelf-Ready Cases, Stackable Trays, and Economical Shippers
Forms Corrugated Material and Paperboard
Simple Tool-less Changeover



ENCLOSURE CONFIGURATIONS

Main Panel	NEMA 12 (Painted), NEMA 4 (SS) or NEMA 4X(SS)
Voltage Separation	Voltage Separation Standard (High/Low)
Panel Cooling	Vortex, Heat Exchanger or Air-Conditioner
Cable Management	Cable Tray, Energy Chain and Conduit



UTILITIES

Power	480v 60hz 3ph
Air	15 SCFM @ 80PSIG



MACHINE LAYOUT

Right Hand	Left, Right or Inline Discharge
Left Hand	Left, Right or Inline Discharge



GANTRY

Discharge	Positively Places Cases onto Conveyor Surface
Orientation	Optional Case Discharge Rotate is Recipe Driven
Elevation	Wide Range of Discharge Elevation Options



DIMENSIONS

Weight	2,700 lbs.
Overall Length	15' 0" (4,570 mm)
Overall Width	3' 7" (1,120 mm)
Overall Height	8' 3" (2,515 mm)



CONTROL SYSTEM

PLC	Allen-Bradley Compact Logix
HMI	Allen-Bradley Panelview 700 or 1000
Servo Motors	Allen-Bradley VPL or VPF (food grade)
Safety System	Category II or III



MACHINE OPTIONS

Frame Materials	Stainless Steel or Painted Carbon Steel
Discharge	Integrated Conveyor With Case Clamp
Magazine	Extended Magazine Length
Changeover Counters	Mechanical or Electronic Feedback Counters
Tooling Cart	Mobile Cart to Store Changeover Tooling
Changeover Cart	Ergonomic Cart Lifts and Transports Tooling
Status Glow	Bright Internal LED Status Lights

Please call (800) 328-5558 to discuss custom configurations and applications.



Delkor Systems, Inc. | 4300 Round Lake Rd. West, St. Paul, MN 55112
1.800.328.5558 | www.delkorsystems.com | info@delkorsystems.com