



H4000

Accurate, robust metering

Woltmann cold water meters

H4000 Woltmann cold water meter


The H4000 is a Woltmann-type meter designed for measuring bulk flows of cold potable water for revenue billing in commercial or industrial applications and distribution system monitoring.

Available in ten sizes for flow rates between 0.35 m³/h and 2000 m³/h, the H4000 operates at temperatures up to 50°C and a maximum working pressure of 16 bar. Accuracy is maintained in both forward and reverse flow, and the product offers the benefits of inductive-based pulse communications technology. The meter is approved to the latest European Directive 2004/22/EC. It can be installed in horizontal, vertical and inclined pipelines.

Intelligent metering

Fully compatible with a range of intelligent meter reading systems, H4000 can provide even more vital management information to assist with effective distribution management, reduce water losses from leakage and improve customer service. When combined with the TRC600 unit, a range of intelligent features including leakage alarms, data logging and tariffs enables a complete metering system that addresses the efficiency objectives for water providers.



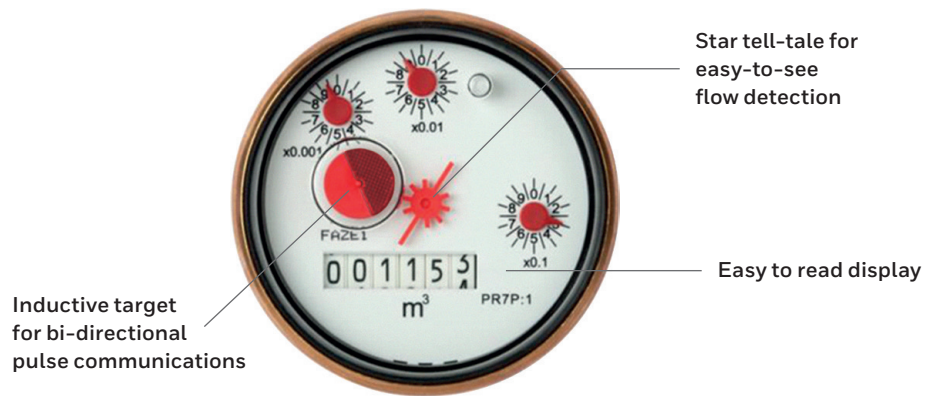

Key features

- Inductive register for improved output performance and security
- Extended low and high flow performance
- Suitable for forward and reverse flow metering
- Robust shroud and copper can register for long-life and clear readability
- Longer wear life for optimum accuracy

Robust construction

The H4000 is manufactured from the highest quality materials for maximum resistance to wear and corrosion. Meter body and cover are epoxy powder coated for protection in all environments. Thrust pads and stub spindles are manufactured in tungsten carbide and jewelled rotor bearings are used for maximum wear life. All wetted materials are UK WRAS approved against health risk.

Flexible installation


Installation can be in horizontal, vertical and inclined pipelines. The H4000 also achieves good performance in abnormal installations.

Reverse flow metering

Available in sizes up to 150mm, reverse flow metering aids network management and ensures accuracy in revenue billing applications.

Reliable connectivity

The H4000 uses an inductive register to deliver enhanced communications performance and tamper-proof security, offering protection against fraud. The H4000 is compatible with the PR7 inductive pulse transmitter, and offers both high and low speed bi-directional pulse capabilities as standard. The PR7 is fully compatible with other common ancillary devices including data loggers and AMR systems. When used in conjunction with H4000's optional integrated pressure port, this allows convenient logging of flow-rate and pressure simultaneously for effective water resource management.

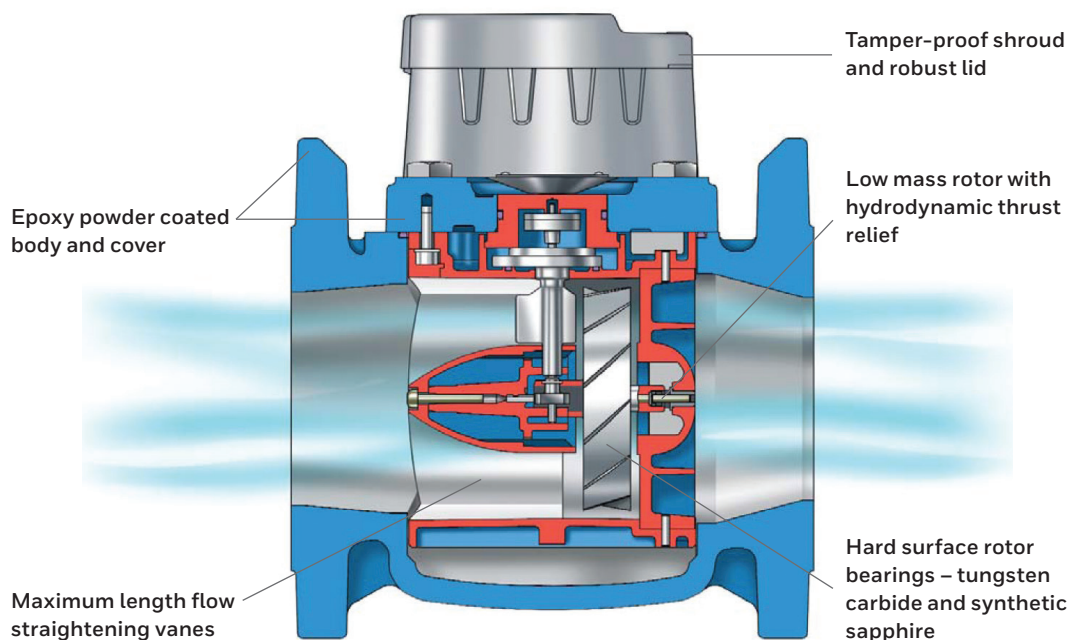

H4000

Product Specification




H4000 PERFORMANCE (FORWARD FLOW)

METER SIZE (MM)	FLOW	UNITS	40	50	65	80	100	125	150	200	250	300
OVERLOAD FLOW RATE	qs±2%	m³/h	90	90	120	200	250	250	600	1000	1600	2000
PERMANENT FLOW RATE	qp±2%	m³/h	50	50	65	120	180	180	450	700	1000	1500
TRANSITIONAL FLOW RATE	qt±2%	m³/h	1	1	1.5	2	2	2	4	6	11	15
MINIMUM FLOW RATE (HORIZONTAL)	qmin±5%	m³/h	0.35	0.35	0.4	0.5	0.6	0.6	1.8	4	6	12
MINIMUM FLOW RATE (VERTICAL)	qmin±5%	m³/h	0.45	0.45	0.75	1.2	1.2	1.2	4.5	7.5	12	18
STARTING FLOW (APPROXIMATELY)		m³/h	0.15	0.16	0.17	0.22	0.25	0.25	0.9	1.2	1.8	1.8
HEADLOSS AT MAXIMUM FLOW		bar	0.84	0.49	0.69	0.27	0.43	0.58	0.33	0.32	0.37	0.58
MAXIMUM REGISTRATION		millions of m³	1	1	1	1	1	1	10	10	10	10
MAXIMUM WATER TEMPERATURE		°C	50	50	50	50	50	50	50	50	50	50
MAXIMUM WORKING PRESSURE		bar	16	16	16	16	16	16	16	16	16	16

STANDARD 2004/22/EC MID MI-001

METER SIZE		mm	40	50	65	80	100	125	150	200	250	300
OVERLOAD FLOW RATE	Q4	m³/h	79	79	79	200	200	200	500	787.5	1250	2000
PERMANENT FLOW RATE	Q3	m³/h	63	63	63	160	160	160	400	630	1000	1600
TRANSITIONAL FLOW RATE	Q2	m³/h	0.81	0.81	1.6	2.05	2.05	2.05	3.2	6.3	10	20.48
MINIMUM FLOW RATE	Q1	m³/h	0.5	0.5	1	1.28	1.28	1.28	2	3.94	6.25	12.8
TURNDOWN RATIO R	Q3/Q1	R value	125	125	63	125	125	125	200	160	160	125
HEADLOSS AT Q3	ΔP	bar	0.39	0.24	0.19	0.18	0.18	0.24	0.15	0.12	0.15	0.37

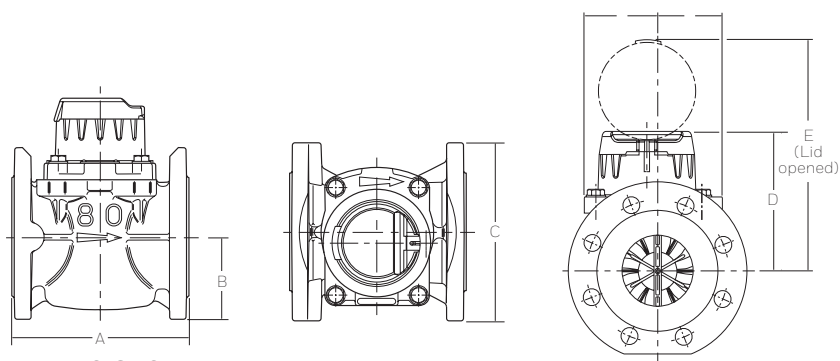


DIMENSIONS


METER SIZE (mm)	UNITS	40	50	65	80	100	125	150	200	250	300
OVERALL LENGTH (ISO) (A)	mm	300	200/300	200/300	200/350	250/350	250	300/500	350	450	500
OVERALL LENGTH (KENT) (A)	mm	311	311	-	413	483	-	-	520	-	-
HEIGHT (B)	mm	78	78	86	94	106	118	135	165	198	225
HEIGHT (D)	mm	148	148	148	159	159	159	206	228	246	246
HEIGHT (E)	mm	236	236	236	247	247	247	294	316	334	334
FLANGE DIAMETER (C)	mm	151	166	186	201	228	251	286	341	409	461
WEIGHT (ISO)	kg	11.8	12.2/13.1	13/14.4	14.1/16.6	19.4/21	20.5	37.5/43.5	47.5	82	104
WEIGHT (KENT)	kg	12	13.3	-	17.6	23.6	-	-	54	-	-

H4000 Product Specification

TYPICAL ACCURACY CURVE

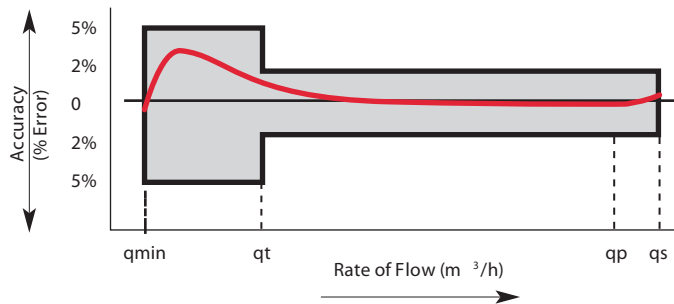

TYPICAL HEADLOSS CURVE

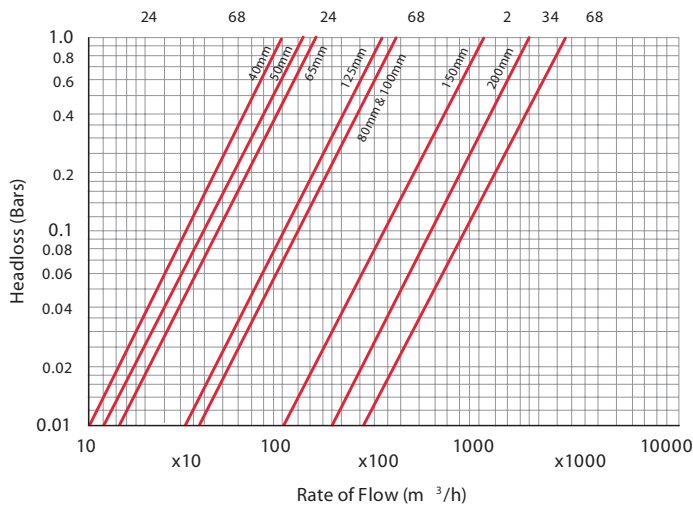

PULSE CONNECTIVITY

Calculating pulse weights when fitted with PR7 inductive pulser:


Pulse weight is calculated by multiplying the register 'pulse factor' (P) by the PR7 'K-factor' (K);

Pulse weight (litres per pulse) = P x K.

SIZE	PULSE FACTOR	K-FACTOR			
		K1	K10	K100	K1000
40mm	P:1	1 ltr	10 ltrs	100 ltrs	1,000 ltrs
50mm	P:1	1 ltr	10 ltrs	100 ltrs	1,000 ltrs
65mm	P:1	1 ltr	10 ltrs	100 ltrs	1,000 ltrs
80mm	P:1	1 ltr	10 ltrs	100 ltrs	1,000 ltrs
100mm	P:1	1 ltr	10 ltrs	100 ltrs	1,000 ltrs
125mm	P:1	1 ltr	10 ltrs	100 ltrs	1,000 ltrs
150mm	P:10	10 ltrs	100 ltrs	1,000 ltrs	10,000 ltrs
200mm	P:10	10 ltrs	100 ltrs	1,000 ltrs	10,000 ltrs
250mm	P:10	10 ltrs	100 ltrs	1,000 ltrs	10,000 ltrs
300mm	P:10	10 ltrs	100 ltrs	1,000 ltrs	10,000 ltrs

PR7 is an open collector pulse transmitter suitable for data logging, AMR and telemetry equipment. Check with your equipment supplier for full details of compatibility.

Pressure equipment directive 97/23/EC. This product is applicable in networks for the supply, distribution and discharge of water and associated equipment and is therefore exempt.

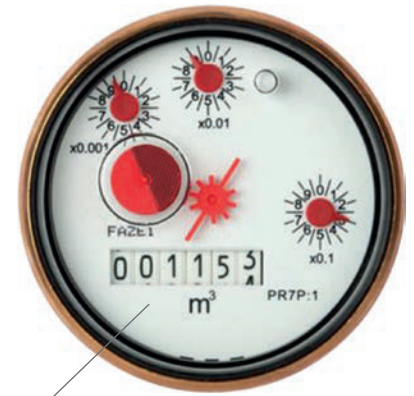

On this example 50mm H4000 register, the user can identify from the dial plate both the:

- Type of pulser to use, i.e. PR7
- Pulse factor, i.e. P:1



K 1:100

On the PR7 unit the user can identify from the label the K-factors for each output channel

Primary output K-factor

Secondary output K-factor

Honeywell

ADR
Arthur D Riley & Co Ltd

fieldsmart technology



ADRwater

AUCKLAND
8 BEATRICE TINSLEY CRES
ROSEDALE 0632
PO BOX 302-248, NORTH HARBOUR
AUCKLAND 0751
T: (09) 444 2350 F: (09) 444 3085

HAMILTON
1/21 RAILSIDE PLACE
DINSDALE 3204
PO BOX 230
RAGLAN 3265
T: (07) 846 0602 F: (07) 846 0604

WELLINGTON HEAD OFFICE
137 THORNDON QUAY
WELLINGTON 6011
PO BOX 3749
WELLINGTON 6140
T: (04) 472 7614 F: (04) 472 7658

CHRISTCHURCH
UNIT 4, 89 VICKERYS ROAD
WIGRAM 8042
PO BOX 11 033, SOCKBURN
CHRISTCHURCH 8443
T: (03) 379 2628 F: (03) 379 2627

www.adriley.co.nz