

ChemLINE[®] 2400 ES

Elevated Service

Protective lining for abrasion resistant service at higher temperatures.

Description

ChemLINE[®] 2400 ES (Elevated Service) is an abrasion resistant heat cured polymer lining system. ChemLINE[®] 2400 ES is a tough, flexible lining designed to handle the abrasiveness of coal, ore, plastic pellets and other media up to 400°F (204°C). ChemLINE[®] 2400 ES has excellent chemical resistance capable of withstanding the corrosive attack that normally comes with media handled.


Chemical Resistance

Sulfuric acid to 98%, most solvents including methylene chloride, MEK, methanol, gasohol, distilled water, inorganic acids, dilute organic acids and alkalis. Ideal for corrosive vapor environments.

Industry Applications

- ▶ Slurry pipes
- ▶ Duct
- ▶ Pumps
- ▶ Coal bunkers
- ▶ Bag houses
- ▶ Ion exchange vessels
- ▶ Hoppers
- ▶ Silos and chutes

Abrasion Resistance

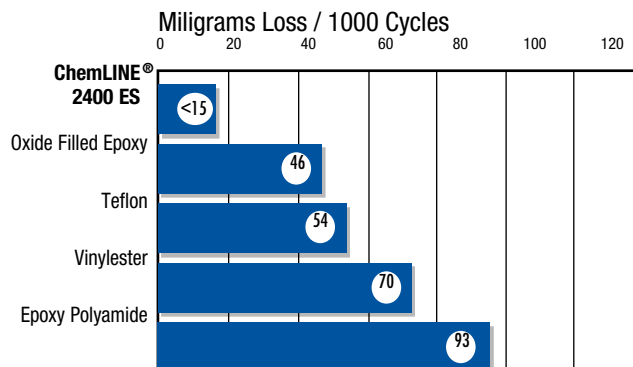

Application Highlights

- ▶ Can be applied to pitted and corroded steel surfaces
- ▶ Outstanding abrasion resistance
- ▶ Force cured system
- ▶ Low VOC - 110 grams/L (0.92 lbs. per gallon)
- ▶ Excellent adhesion
- ▶ Good flexibility and toughness
- ▶ Field repairable
- ▶ Steam cleanable
- ▶ Resists hydroblasting
- ▶ Dry heat resistance to 400°F (204°C)


Typical Properties (mixed, as supplied)

- ▶ Stock Colors _____ Gray, Red
- ▶ V.O.C. Level/Gal. _____ 110 grams/L (0.92 lbs./gal.)
- ▶ Pot Life _____ 120 minutes @ 75°F (24°C)
- ▶ Viscosity Reduction _____ Reduce with Toluene or Xylene
- ▶ Solids by Volume _____ 87%
- ▶ Recommended Film Thickness (dry) mils average _____ Steel: 16 mils (400 microns)
- ▶ Shelf Life _____ 12 months

For product recommendations and technical, application and heat curing information contact Advanced Polymer Coatings' customer service. Contact +1 440-937-6218.

Chart Background

Comparison of ChemLINE[®] 2400 ES vs. Various Linings using Taber Abrasion Test ASTM D4060; CS-17 WHEELS



ADVANCED
POLYMER COATINGS



Coating	Description	Typical Applications	System/DFT
ChemLINE® 784 <i>previously: ChemLINE® 784/32</i>	Excellent chemical resistance, high functionality, two component low temperature cure polymer coating.	Reactors, chemical storage tanks, scrubbers, piping, ducts, rail cars, ISO tanks, OTR tankers, barge tanks, secondary containment, clean rooms, structural steel, manhole covers, vaults, & floors.	Steel: 2 coats. 300-350 microns. (12-14 mils). Concrete: 2 coats. 500-600 microns. (20-24 mils).
ChemLINE® 784 ES Elevated Service <i>previously: ChemLINE® 784/31</i>	Highly chemically resistant, high functionality, two component high temperature cure polymer coating, with high cure.	Tanks, pipes, & scrubbers.	Steel: 2 coats. 300-350 microns. (12-14 mils).
ChemLINE® HS High Solids <i>previously: ChemLINE® 784/32 PC</i>	High solids, 1 or 2 coats, chemically resistant two component low temperature cure polymer coating.	Transportation - rail cars, OTR tankers, ISO tanks, barge tanks, & tanker ships.	Steel: 1 or 2 coats to achieve 300-350 microns. (12-14 mils).
ChemLINE® 784 AS Anti-Static	Static dissipating, chemically resistant, high functionality, two component low temperature cure polymer coating.	Clean rooms, flooring, ducts, structural steel, hopper cars, and where a static dissipating lining is required.	Steel: 2 coats. 300-350 microns. (12-14 mils). Concrete: 2 coats. 500-600 microns. (20-24 mils).
ChemLINE® 784 WS Wine & Spirits <i>previously: ChemLINE® EF</i>	Two component low temperature cure polymer coating for wine and spirits tanks.	Wine & spirits tanks.	Steel: 2 coats. 300-350 microns. (12-14 mils).
ChemLINE® 2400 Abrasion Resistant <i>previously: ChemLINE® 2400/32</i>	Abrasion and chemically resistant two component low temperature cure polymer coating.	Slurry tanks, scrubbers, dump trucks, bag houses, FGD units, tank containers, hopper cars, ion exchange vessels, secondary containment, and floors.	Steel: 2 coats. 400-450 microns. (16-18 mils). Concrete: 2 coats. 600-650 microns. (24-26 mils).
ChemLINE® 2400 ES Elevated Service <i>previously: ChemLINE® 2400/31</i>	Abrasion and highly chemically resistant two component high temperature cure polymer coating.	Tanks, pipes, & scrubbers.	Steel: 2 coats. 400-450 microns. (16-18 mils).

Other APC products offered that complement ChemLINE® coatings include: **ChemLINE® Primer** for superior bonding and sealing properties; **ChemLINE® TSP Thick Set Patch** and **ChemLINE® TSF Thin Set Filler** offer excellent chemical resistance and flexibility.



Advanced Polymer Coatings
 Avon, Ohio 44011 U.S.A.
 +1 440-937-6218 Phone
 800-334-7193 Toll-Free USA & Canada



The information provided by Advanced Polymer Coatings, Inc. (APC) for the application or repair of APC coatings is based upon protective coating industry standards and knowledge gained through observation of professional applicators throughout the world that have successfully applied APC coatings. APC does not exercise any control over selection of the applicator that applies or repairs APC coatings. By providing information APC is not representing, directly or by implication, that an applicator that is provided with this information will achieve a result that will pass without objection in the trade or industry, otherwise referred to as MERCHANTABILITY, or will meet the vessel owner's protective coating requirements, otherwise referred to as FITNESS FOR A PARTICULAR PURPOSE. The only warranty provided by APC through its information and literature is that all APC products when delivered will have been manufactured in accordance with APC's manufacturing procedures, will be accurately labeled, and when mixed, applied and cured in a controlled environment in accordance with APC's current written application guidelines will withstand chemical corrosion as set forth in APC's chemical compatibility reference guide. The chemical compatibility reference guide and

current application guidelines are available at www.adv-polymer.com. Any customer specific express warranty can only arise from a written warranty extended by APC to the specific customer identified in the writing. APC DISCLAIMS ALL OTHER WARRANTIES, EXPRESS OR IMPLIED, INCLUDING WITHOUT LIMITATION THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE THAT ARE CONTAINED IN ARTICLE 2 OF THE UNITED STATES UNIFORM COMMERCIAL CODE AND ANY SIMILAR WARRANTIES CONTAINED IN THE LAWS OF OTHER COUNTRIES WHERE APC PRODUCTS ARE DELIVERED OR APPLIED. ALL CONTRACTS FOR THE SALE OF APC PRODUCTS SHALL BE GOVERNED BY THE UNIFORM COMMERCIAL CODE WITHOUT REGARD TO ANY STATE VARIATIONS.

© Copyright 2020-08-18 APC2948F



TOMORROW'S SOLUTIONS TODAY