

Trident[®]

Package Water Treatment System




WESTECH[®]



The Trident® Package Water Treatment System

When Microfloc™ products first introduced the Trident technology, it represented a significant advancement in water and wastewater treatment for plant owners and operators. Not only did it remove turbidity, suspended solids, color, iron, manganese, odor, taste, and pathogens such as Giardia lamblia and Cryptosporidium, but it did so at a lower capital cost than conventional systems, in a smaller space, and at higher flow rates per unit area.

Today, more than 800 Trident technology systems, large and small, are at work all across North America and the world. Our Trident systems continue to evolve as we constantly strive to find ways to produce even higher quality treated water at higher flow rates per unit area and further reduce installation and operating costs.



Surface Water Treatment

- Turbidity reduction
- Color removal
- Reduction of High TOC/DBP precursors

Groundwater Treatment

- Iron and manganese removal
- Arsenic
- Groundwater under the influence of surface water

Tertiary Treatment

- Water reuse
- Phosphorus removal


Industrial Process Water

Trident Design Criteria		
	Raw Water	Finish Water
Turbidity (NTU)	< 75	< 0.1
True Color (Pt-Co Units)	< 35	< 5
Combined Turbidity + Color	< 75	
Iron & Manganese (mg/L)	< 10	< 0.3 / 0.05

Proven and Efficient


The Trident water treatment system utilizes a two-stage configuration consisting of an up-flow buoyant bead and compressible media Adsorption Clarifier® system followed by a conventional down-flow mixed media filter to produce high quality water.

Filtration Mode

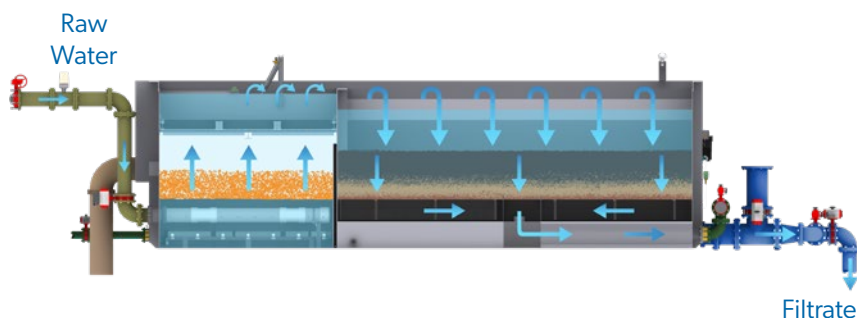


The treatment process is started when chemically dosed raw water enters the Adsorption Clarifier near the bottom of the tank where an upflow treatment process combines flocculation and clarification. From the Adsorption Clarifier, flow continues over a weir into the collection trough where it is distributed into the mixed media filtration chamber, after which it is collected by the MULTIBLOCK® underdrain with Laser Shield™ media retainer and exits the tank.

Buoyant Media Flush Mode

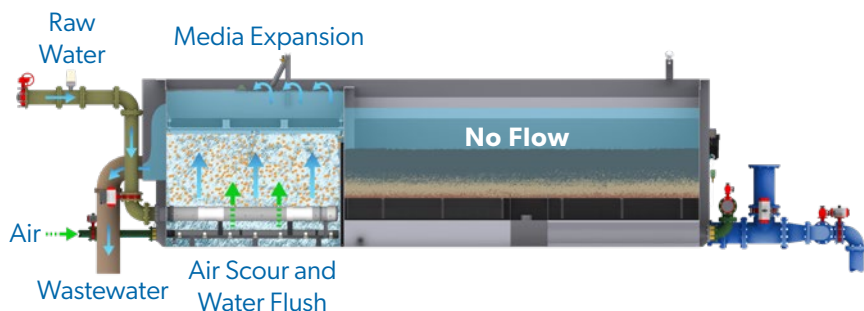


The Adsorption Clarifier is engineered to automatically initiate a flush cycle once headloss indicates that cleaning is required. When the cleaning is initiated, the waste gate and air scour valves are opened as raw water continues to flow. The air/water flush aggressively separates and removes the solids from the media. Solids are then discharged out through the waste pipe.

Backwash Mode

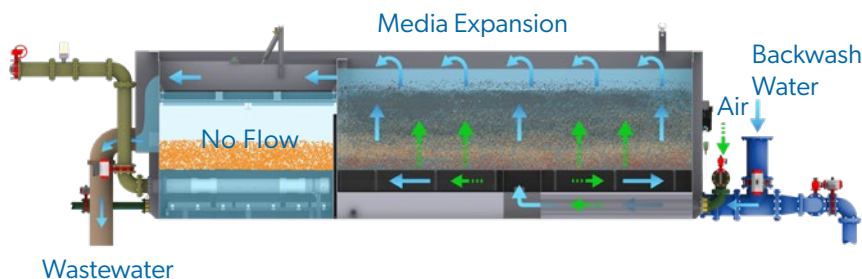

Like the Adsorption Clarifier flush, the backwash cycle is initiated when dirty bed headloss is reached in the mixed media filter section. The Trident inlet and outlet valves are closed and the air scour valve is opened to allow an air scour cycle. Solids from the backwash are then removed by water flowing up into the collection trough and discharged out through the waste pipe. A filter-to-waste sequence follows to ripen the filter media before returning the unit to service.

Complete Package Plant

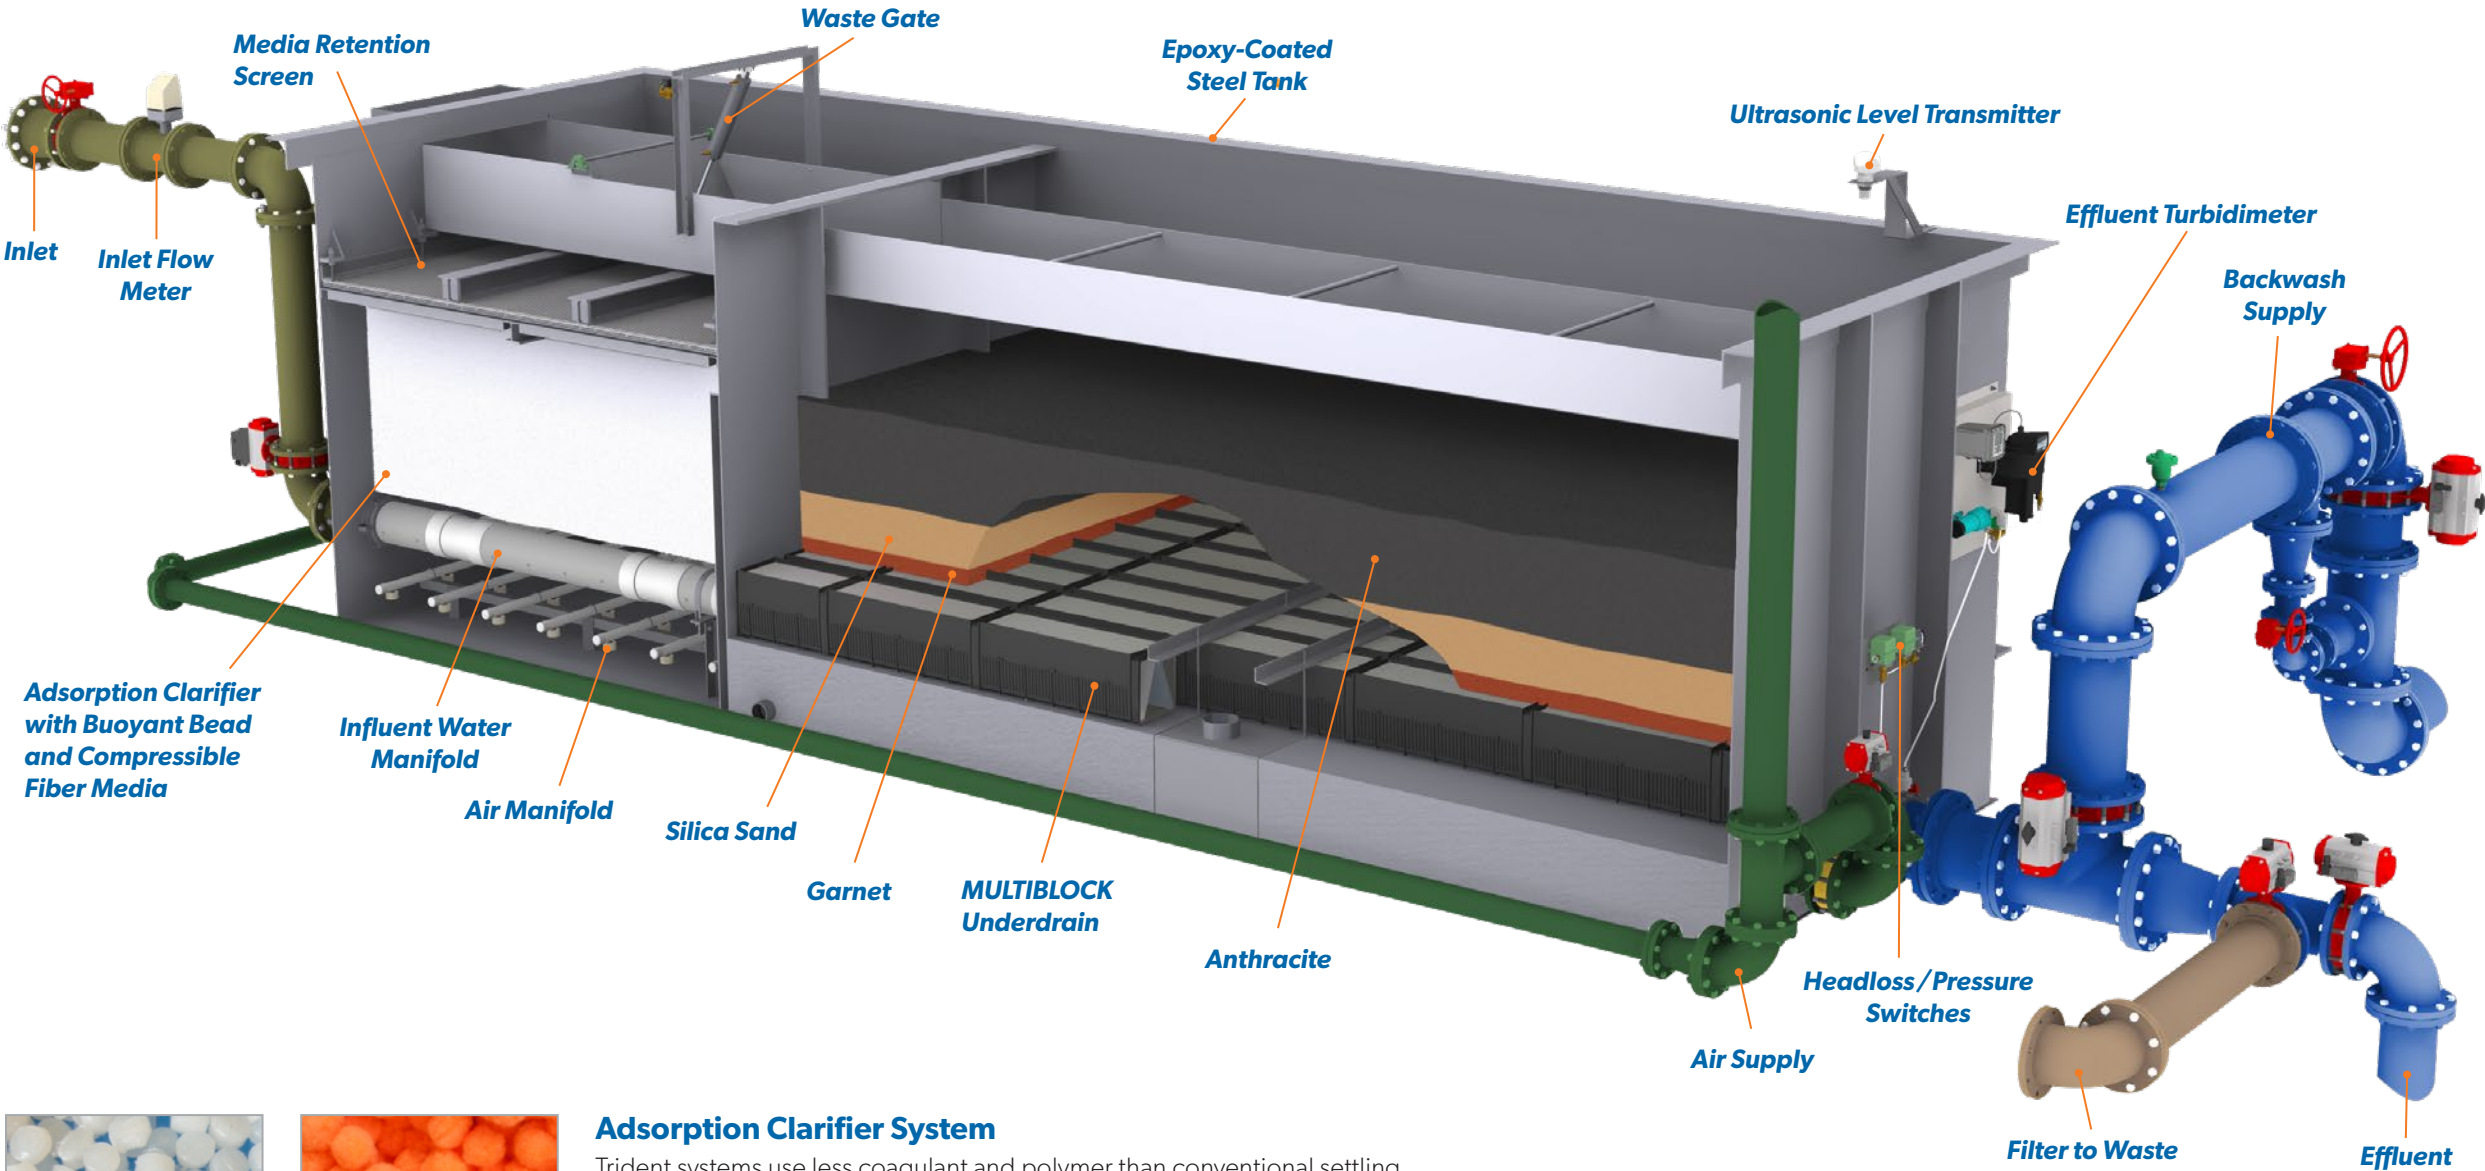

Standard Components
Epoxy-coated steel tanks
Media
Internals
Actuated and manual valves
Inlet magnetic flow meter
Pressure transmitters
Ultrasonic level transmitter
Effluent turbidimeter
Automated PLC controls
Backwash control valves
Blower package
Chemical feed packages (coagulant and polymer)

Optional Components
Air compressor package
Integrated plant PLC controls package
Backwash magnetic flow meter
Interconnecting walkways and platforms
Aluminum or stainless steel tanks
Inlet turbidimeter
pH monitor
Streaming current monitor
Static mixer




Adsorption Clarifier System


Trident systems use less coagulant and polymer than conventional settling type clarifiers. Within the Adsorption Clarifier system it is not necessary to form a settleable floc, which means floc size and settling time are not factors. The buoyant media is rolled and scarified to greatly improve particulate removal. The compressible fiber media is used to capture more solids. The buoyant and compressible fiber media are NSF-61 certified and typically will last the life of the system.

Mixed Media Filtration

Microfloc pioneered mixed media technology, which has become the industry filtration standard. By using three or more granular materials of differing size and specific gravity, the progressive coarse-to-fine mixed media produces superior quality finished water.



Trident Process Flow Diagram

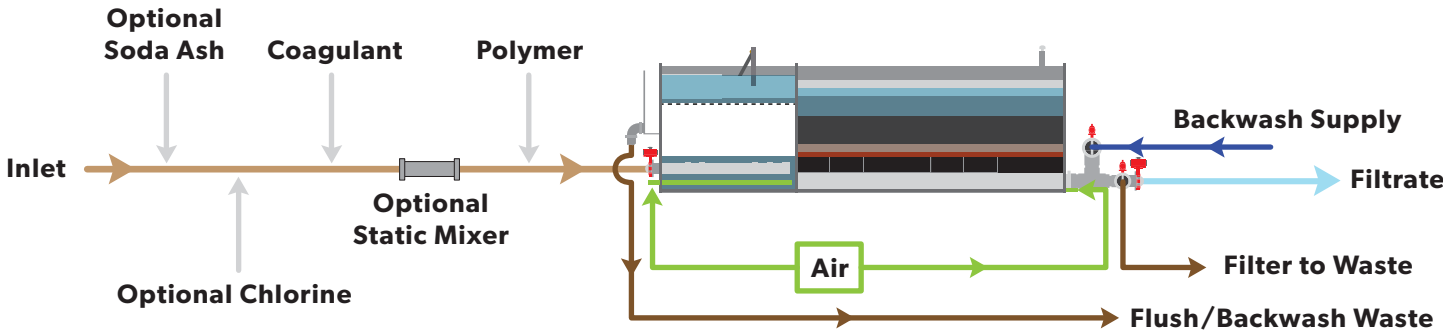


Highly Efficient, Simple Operation

MULTIBLOCK

MULTIBLOCK underdrains provide a high-quality, low-cost, engineered product that is economical and versatile. MULTIBLOCK underdrains are fitted with the unique Laser Shield media retaining system that eliminates the need for support gravel. Combined air and water backwash is provided using this system.

- **Reduced profile underdrain**
- **Superior media retention capability**
- **Uniform distribution of water and air backwash**
- **NSF-61 approved**
- **Resistant to plugging and fouling**



Trident Process Controller Including the AQUARITROL® III

Trident package treatment units are supplied with fully automated programmable logic controls (PLC). These controls allow plant personnel to easily monitor operational parameters and control all treatment equipment and processes.

Changes in raw water characteristics and flow rate are automatically detected by the AQUARITROL III program. This PLC-based, feed-forward, loop control system monitors the filter effluent quality and continually evaluates and regulates influent chemical feed to maintain desired effluent water quality parameters. The operator sets an adjustable effluent quality setpoint and the Trident controls, utilizing the AQUARITROL III program, do the rest.

WesTech's electrical engineers and programmers can also integrate new whole plant operation or existing plant instruments into the Trident PLC controls. Complicated plant expansions are simplified by providing seamless integration of new and existing equipment.

- **Optimized and flexible process controls**
- **Chemical usage is maximized while maintaining performance**



Get More with Microfloc

Big Performance in a Small Water Treatment System

For lower flows, Microfloc offers the Tri-Mite® Package Water Treatment Plant. Using the same process as the Trident system, the Tri-Mite comes factory-assembled with pumps, controls, piping, valves, and an air scour blower mounted on the tank. These items are pre-plumbed and wired for simple, fast installation.

The Tri-Mite unit is available in five standard sizes as single units from 50 gpm to 350 gpm and as a two-unit system up to 700 gpm capacity. For flows less than 50 gpm, a single unit can be operated on an intermittent or reduced flow basis. These systems are perfect for new designs with future expansion in mind. The future additional tank would share the control panel, blower, and backwash pump of the first tank.

Equipment Upgrades and Expansions

If your unit is more than 10 years old, or has seen changes in raw water quality, it may be worthwhile to inquire about upgrading your Trident system. Common upgrades include enhanced PLC control systems, underdrain replacement accompanied with backwash upgrade, Trident HSR integrated presedimentation systems, and replacement of up-flow media. Retrofits are also available for other package treatment systems.

Stretch Customization

Some regulatory requirements may dictate a lower hydraulic loading through the filter cell. This is a simple change for the Trident system. An optional stretch filter cell is available to lower the hydraulic loading rate from 5 gpm/ft² to 4 gpm/ft². Other filter loading rates may also be achieved through custom design.

Standard Sizes

		Tri-Mite					Trident			
Influent Flow Rate GPM		50	75	100	175	350	175	350	700	1400
Tank Dimensions (Shipping)	Length	9 ft 0 in	9 ft 2 in	11 ft 2 in	13 ft 9 in	23 ft 2 in	10 ft 1 in	14 ft 6 in	27 ft 10 in	39 ft 10 in
	Width	5 ft 8 in	7 ft 10 in	7 ft 8 in	9 ft 11 in	10 ft 2 in	6 ft 11 in	8 ft 11 in	8 ft 11 in	11 ft 11 in
	Height	8 ft 5 in	8 ft 6 in	8 ft 6 in	8 ft 2 in	8 ft 3 in	8 ft 5 in	8 ft 5 in	8 ft 5 in	10 ft 1 in
Weights	Shipping (lbs)	6,300	8,100	9,600	9,200	14,600	7,000	10,250	17,000	34,000
	Operating (lbs)	14,000	20,000	25,000	43,000	78,000	35,000	70,000	140,000	330,000
Tank Connections	Influent	2 in	3 in	3 in	4 in	6 in	4 in	6 in	8 in	12 in
	Effluent	2 in	3 in	3 in	4 in	6 in	6 in	8 in	12 in	16 in
	Backwash Supply	3 in	4 in	4 in	5 in	8 in	6 in	8 in	12 in	16 in
	Waste/Overflow	4 in	6 in	6 in	8 in	10 in	8 in	10 in	14 in	20 in
	Air Wash (Clarifier)	1.5 in	2 in	2 in	2 in	3 in	2 in	3 in	4 in	6 in
	Air Wash (Filter)	1.5 in	2 in	2 in	2 in	3 in	3 in	4 in	6 in	8 in
Waste Production	Flushing Flow Rate (gpm)	50	75	100	175	350	175	350	700	1,400
	Flushing Volume Per Cycle (gal)	500	750	1,000	1,750	3,500	1,750	3,500	7,000	14,000
	Mixed Media Per Cycle (gal)	900	1,350	1,800	3,150	6,300	3,500	7,000	1,4000	28,000
	Filter to Waste Per Cycle (gal)	250	375	500	875	1,750	875	1,750	3,500	7,000



WESTECH[®]



Tel: 801.265.1000
westech-inc.com
info@westech-inc.com
Salt Lake City, Utah, USA

© WesTech Engineering, LLC 2023