




TALKAPHONE

AOR-IP CALL STATION

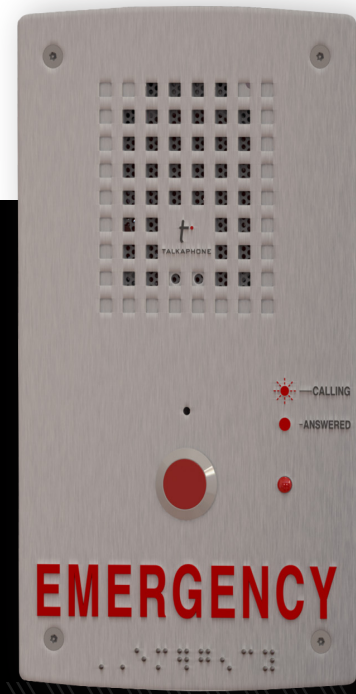

AREA OF RESCUE ASSISTANCE

THE AOR-IP CALL STATION IS AN INDOOR, HANDS FREE ADA-COMPLIANT COMMUNICATION ENDPOINT FOR USE WITH THE AOR-IP SERIES SYSTEM IN AN AREA OF RESCUE ASSISTANCE.


COMPACT IP CALL STATION

- Fully compliant with IBC, ADAAG, ICC A117.1 Ch. 7, and NFPA 72
- Network supervision available when used in conjunction with IP supervisor (Model **AOR-IP-SUP**)
- Automatically plays back a recorded location message to the local IP Command Unit(not off-site)
- Auto-answers calls initiated at the IP Command Unit
- Exceptional sound clarity during conversation (over 85dB, configurable)
- Power over Ethernet (PoE, 802.3af) or local 19-27 VDC
- Vandal resistant stainless steel faceplate and metal button
- LED indicator for the hearing impaired
- Push button once to call, then speak hands-free
- Built-in auto-dialer can dial up to six numbers: if first number doesn't answer or is busy, dials next number

Specifications

Construction:	0.09" (2.2mm) #4 brushed 304 stainless steel faceplate
Operating Temperature:	-40°F to +158°F (-40°C to +70°C)
Relative Humidity:	Up to 95% non-condensing
Protection:	Indoor rated
Communication:	Full duplex two-way hands-free communication
Power:	Power over Ethernet, IEEE 802.3af, Class 0 Local power 19-27 VDC, Idle 4W, Max. 8W IMPORTANT: Must include a battery backup system in the event of power loss.
Network:	10/100 BaseTX Ethernet, RJ45 connectors, Cat5e or better
IP Protocols:	IPv4, TCP, UDP, HTTPS, TFTP, RTP, RTCP, DHCP, SIP
LAN Protocols:	Power over Ethernet (IEEE 802.3af), VLAN (IEEE 802.1 pq), Network Access Control (IEEE 802.1 x), STP (IEEE 802.1 d), RSTP (IEEE 802.1 d-2004)
Programming:	Non-volatile flash memory programming and configuration through Web GUI
IP Address Assignment:	Configurable for static IP address or DHCP
Warranty:	2-year limited warranty

Configurations

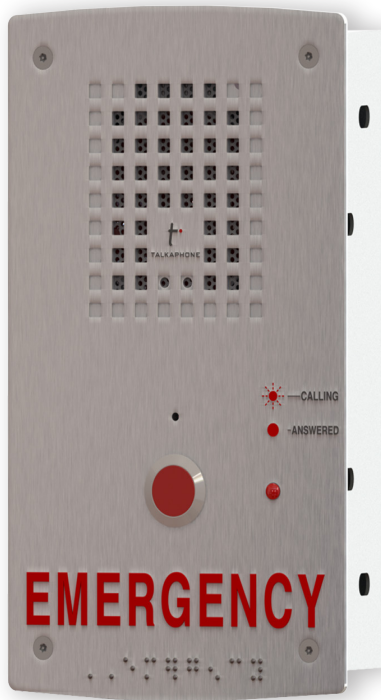

Flush Mount Configuration

Model:	AOR-IP-CSE-FM
Dimensions (W x H x D):	4.75 x 8.23 x 2.75 in. (121 x 209 x 70 mm)
Weight:	5.5 lbs. (2.5 kg)





Surface Mount Configuration

Model:	AOR-IP-CSE-SM
Dimensions (W x H x D):	5.50 x 8.38 x 2.75 in. (140 x 213 x 70 mm)
Weight:	6.0 lbs. (2.7 kg)


DIMENSIONAL DIAGRAMS

All dimensions are in inches and are provided for reference only.

AOR-IP-CSE-FM

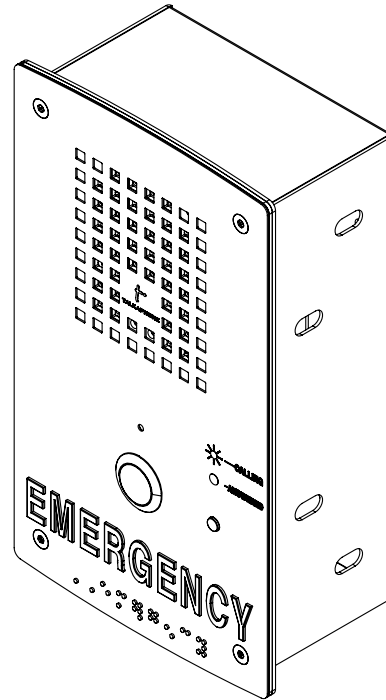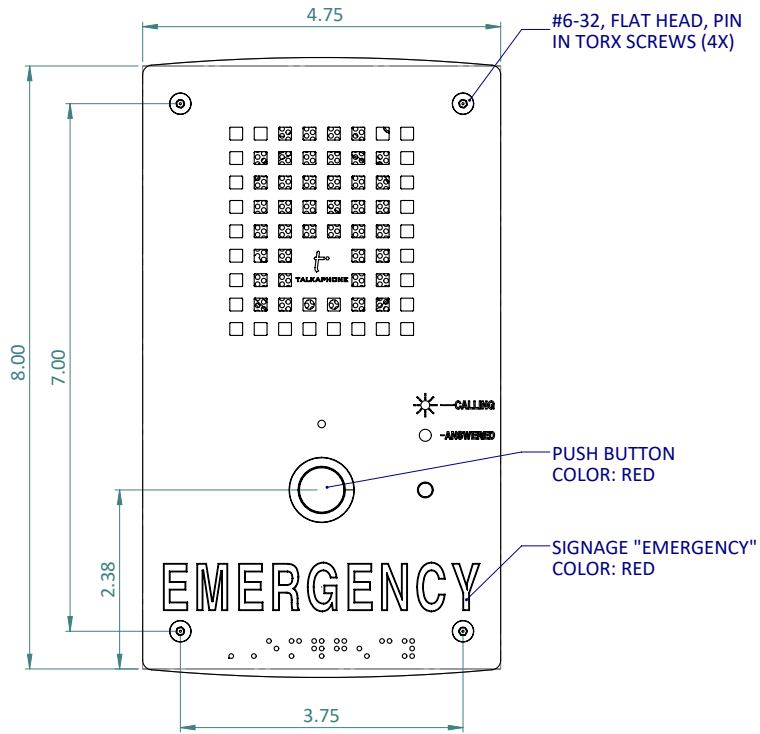

FRONT VIEW

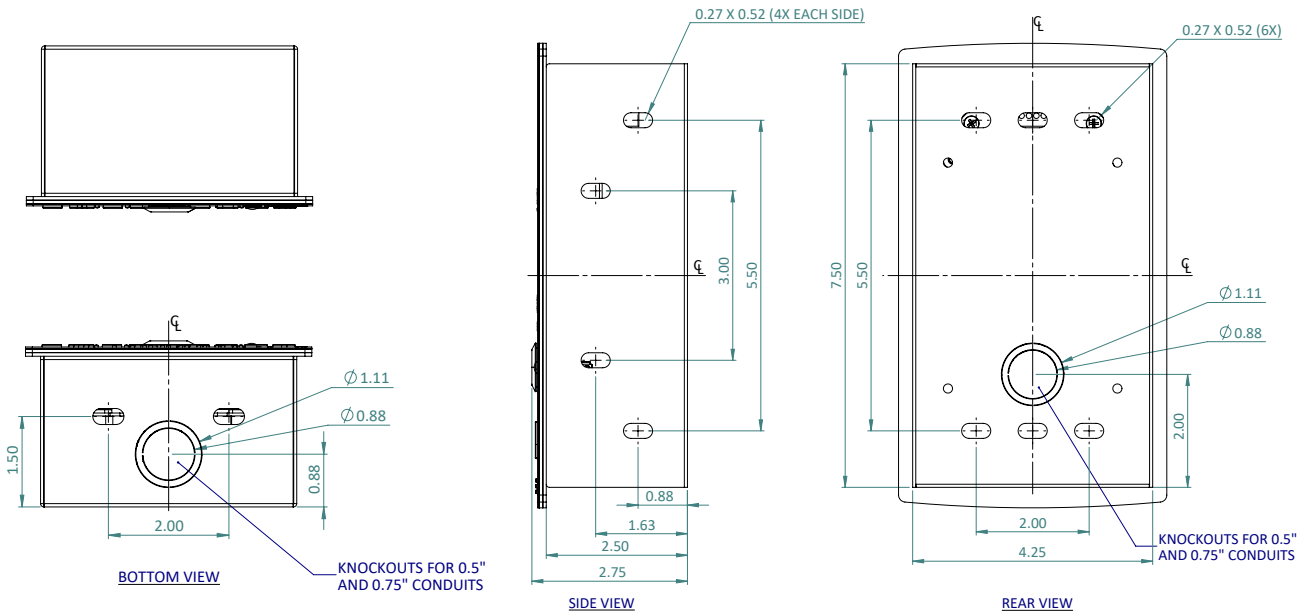

BOTTOM VIEW



SIDE VIEW

REAR VIEW


DIMENSIONAL DIAGRAMS

All dimensions are in inches and are provided for reference only.


AOR-IP-CSE-SM

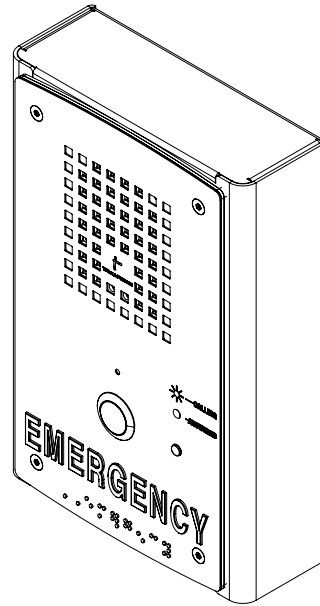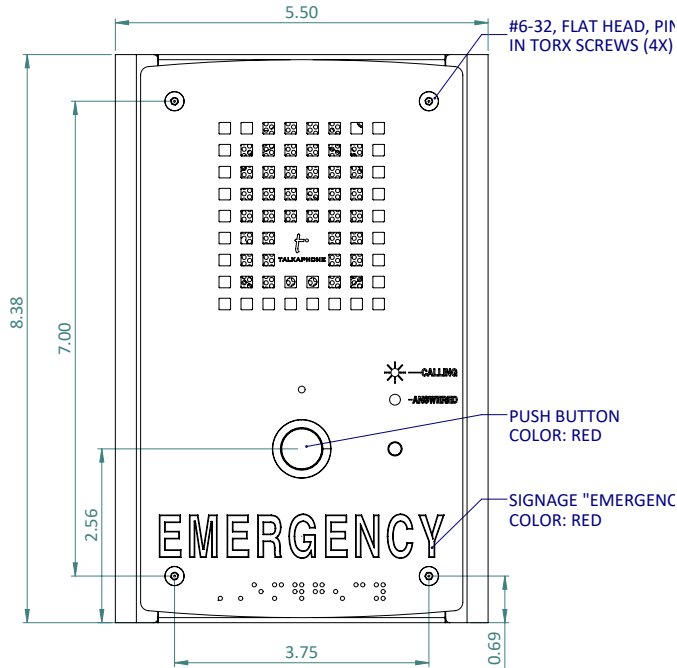


FRONT VIEW

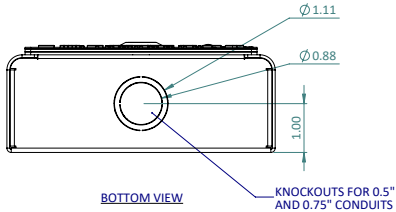

BOTTOM VIEW



SIDE VIEW

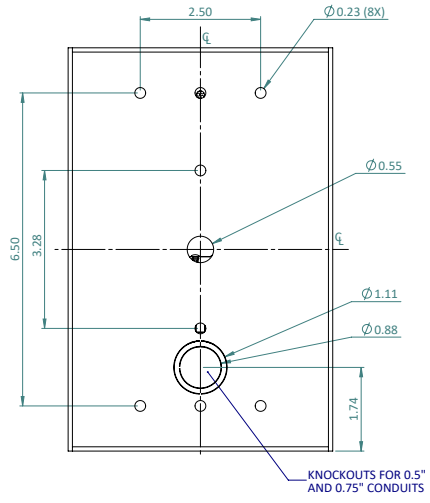

REAR VIEW



THE LEADERS IN SECURITY AND LIFE SAFETY COMMUNICATIONS

Tel: 773-539-1100
Email: info@talkaphone.com
Web: www.talkaphone.com

7530 North Natchez Avenue
Niles, Illinois 60714

Terms of Use and Limited Warranty

This product includes intellectual property and proprietary rights owned by Talk-A-Phone, LLC and/or its licensors. Your use of this product confirms your agreement that Talk-A-Phone, LLC and/or its licensors retain all right, title and interest in and to all such property; that your rights are to access and use the Product for your internal business use only; that all Product elements will be maintained as confidential; and that the Product may not be rented, leased or lent to third parties, reverse engineered, decompiled or disassembled, or otherwise used for any purpose other than as an access device for your premises.

Talk-A-Phone, LLC warrants Talk-A-Phone Emergency Phone, Call Station, Wide-Area Emergency Broadcast System, and Area of Rescue equipment against any defects in material and workmanship, under normal use, for a period of twenty-four (24) months from date of installation, provided that Talk-A-Phone receives a completed "Installation Certification" certifying the date on which the system has been installed. An "Installation Certification" card is enclosed with every unit. In the event that no "Installation Certification" is received by Talk-A-Phone, the twenty-four (24) months will commence on the date of shipment by Talk-A-Phone. Warranty period for the metal elements of models in the GP Series Pedestals, MT Series Towers, MTE Series Towers, MT/R Series Towers, PM Series Pedestals, SM Series Surface Mounts, Via Series Mounts, and WM Series Wall Mounts is five (5) years, under the same terms and conditions. Warranty period for Intercommunication Products is twelve (12) months, under the same terms and conditions. If the product is found by Talk-A-Phone to be defective within the warranty period, Talk-A-Phone's only obligation, and your exclusive remedy, is for the repair or replacement of any defective parts, provided that the product is returned to us at 7530 N. Natchez Ave., Niles, IL 60714. Talk-A-Phone shall have no obligation to furnish or pay for the labor of any third parties or bear the expense of shipping defective products for repair. In no event shall Talk-A-Phone or its licensors or suppliers be liable for any form of exemplary or punitive damages, or any special, indirect or consequential damages. TALK-A-PHONE EXPRESSLY DISCLAIMS ALL OTHER WARRANTIES, WHETHER EXPRESS, IMPLIED OR STATUTORY, INCLUDING BUT NOT LIMITED TO THE IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. In no event shall Talk-A-Phone or its licensors or suppliers be liable for any form of exemplary or punitive damages, or any special, indirect or consequential damages. Your use of this product constitutes your agreement to all of the foregoing terms.

Further information is available at talkaphone.com/legal