



## TECHNICAL SPECIFICATIONS

Product	Item Number	Primary Voltage	Fuse Size	Weight (kg)	Dimensions HxWxD (mm)	Protection/ Insulation Class	Compliance
V205-T AC/DC	K1855-3	240V/1/50-60Hz	16A (slow)	17.6	380x 210 x 480	IP23C / H	EN 60974-1 ROHS CE


## WELDING OUTPUT

Current range (A)	Input Voltage	TIG AC (40°C)	STICK DC (40°C)	O.C.V
		Rated Output Current / Voltage / Duty Cycle	Rated Output Current / Voltage / Duty Cycle	
6 - 200A	240V AC	200A / 18V / 40% 170A / 16.8V / 60%	180 A / 27.2 V / 35% 150 A / 26.0 V / 60%	53.7 V DC

## COOL ARC® 20

Item Number	Flow Rate	Dimensions HxWxD (mm)	Tank Capacity	Weight (kg)
K12031-1	2.5 Liters/min.	180 x 210 x 480	1.7 l	8.3

## A CLOSER LOOK

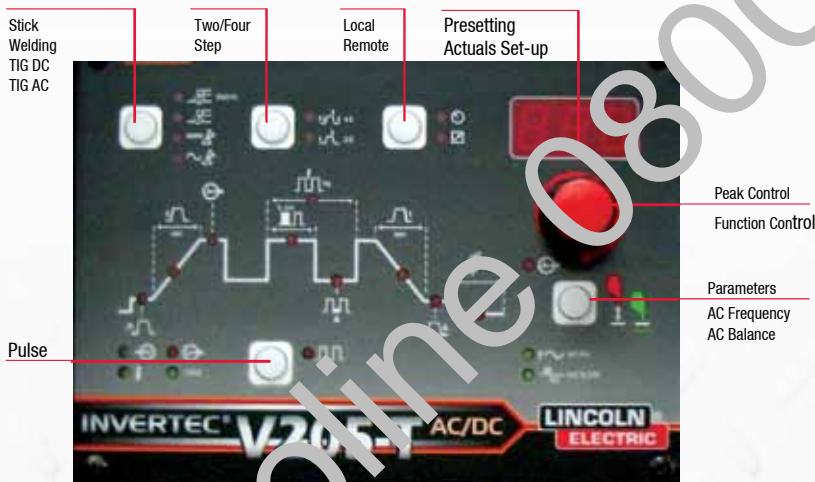

## FEATURES

Features	Parameters
AC Frequency	20-150 Hz
AC balance	35-85 %
Pulse Frequency	0.1-500 Hz
On time peak	1-95 %
Background Current	1-100 A
Up Slope Time	0-10 sec
Down Slope Time	0.2-10 sec
Post Flow Time	0.1-60 sec
Wave shape	Square/Triangle/Sinusoidal

