










## Fantastic perpendicularity. Say goodbye to annoying taper!

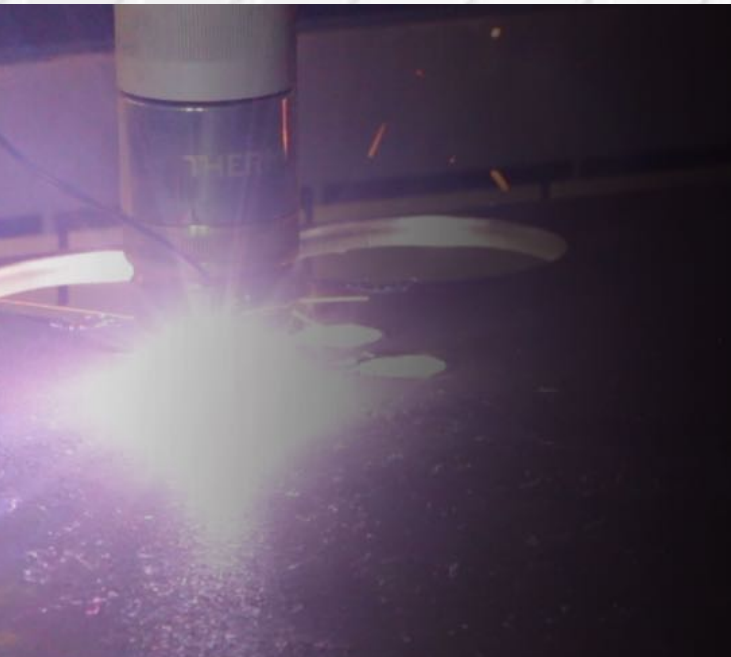

- Stinger PRO can bring you a wonderful cutting quality, all thickness. With HD plasma source ArcBlitz, able to meet ISO range 3 cutting quality. D means the taper angle is smaller than 2 degreeA annoying taper.



## Unbeatable HD plasma power source – ArcBlitz™

### High definition cut, one step in place.

- H  
H H H  
H  
  
H H

### Precise Cuts

- H  
  
•  
  
• H H

A real transformative advance in industrial cutting operations.



### Cost Reduction

- ptimal consumables life without operator adjustment.
- The nozzle uses rapid liquid cooling technology to protect the torch and consumables.
- Precision cutting eliminating cost of secondary operations.

# SPECIFICATIONS

Mild steel	mm	inches
Pierce capacity	30	1.2
Severance	50	2
Stainless steel		
Pierce capacity	25	1
Severance	20	3/4
Aluminum		
Pierce capacity	25	3/4
Severance	25	1

Type	Stinger Pro 5100
Cutting mode	High definition plasma cutting
Input Voltage	110V / 220V
Frequency	50 / 60Hz
Cutting size	3000 * 1500 mm
Input power	3600w
Drive motor	Panasonic servo motor
Reducer	1:25
CNC controller	IPC
Plasma Power Source	ArcBlitz HD
Running Cutting Speed	0 – 20000 mm/min
Tolerance	≤ 0.3mm
Height Control	Automatic voltage THC