

AIR-OPERATED DIAPHRAGM PUMP

When you simply need an air-operated diaphragm pump, the JDI-DP1 and JDI-DP1-UL both come in an all-bolted durable construction for use in automotive applications among others. Rated for use with diesel, kerosene and oil, these UL and non-UL Listed pumps feature O-ring seals and Nitrile diaphragm material, making it ideal for low-viscosity petroleum fluids.


Features include:

- 1" Inlet/Outlet
- Heavy-duty aluminum construction
- 1/4" Air Inlet
- 24 Gallons Per Minute (GPM)*
- 22 lbs.
- JDI-DP1 Max psi: 115 psi
- JDI-DP1-UL Max psi: 110 psi

JDI-DP1



JDI-DP1-UL

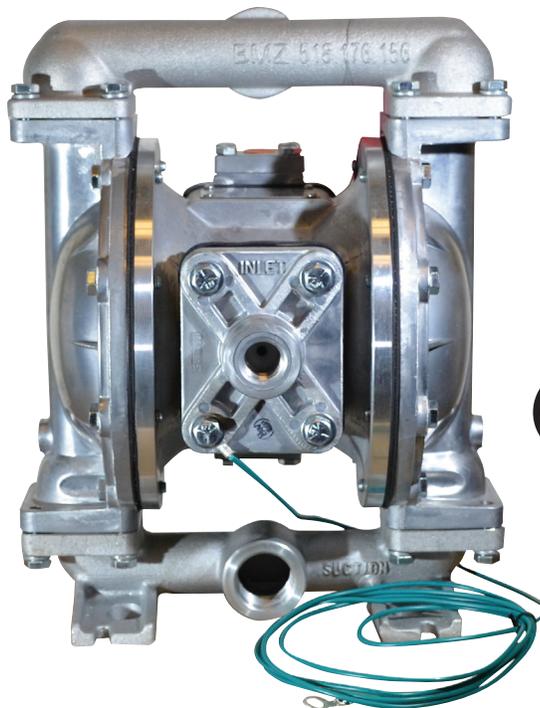

*Flow rate will vary based on temperature, viscosity, purity, and type of fluid.

151 SNYDER AVE. | BARBERTON, OH 44203 | TOLL-FREE: 800.4330708 | FAX: 330.753.6419