


S4L2-Z363SPH

28.8 kWm @ 3000 rpm | VARIABLE SPEED

MITSUBISHI DIESEL ENGINE

COMPACT AND RELIABLE

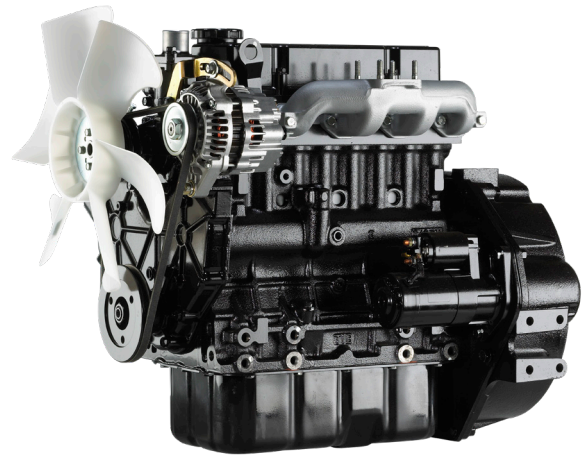

ENGINE DATA

Engine model	S4L2-Z363SPH
Engine type	4-stroke, diesel
Cylinder configuration	4 in-line
Bore x stroke (mm)	78 x 92
Total displacement (l)	1.758
Aspiration	natural
Dry weight (kg)	155
Emission	EU Stage IIIA

Cooling system	water-cooled, forced circulation by centrifugal pump with thermostat
Combustion system	indirect injection, swirl chamber type
Fuel injection system	pump-line-nozzle (in-line pump)
Electrical system (V / A)	12 / 50
Starting system (V / kW)	12 / 2
Rotation (ISO 1204)	counterclockwise
Flywheel and housing	semi: SAE 7.5" / SAE #5

RATING¹

Gross

Net

	w/o fan	with fan
Output (kWm)	28.8	26.2
Output (bhp)	38.6	35.1
Engine speed (rpm)	3000	




Gross

Fuel consumption 100% load (g/kWh) ²	265
Max. torque (Nm)	97
Side gear PTO (Nm)	39.2

¹ Rating definition according ISO3046, rating tolerance $\pm 5\%$ of nominal. ² Fuel consumption is based on ISO3046/1 with $\pm 8\%$ tolerance at 100% rated power.

PERFORMANCE CURVE

DIMENSIONS

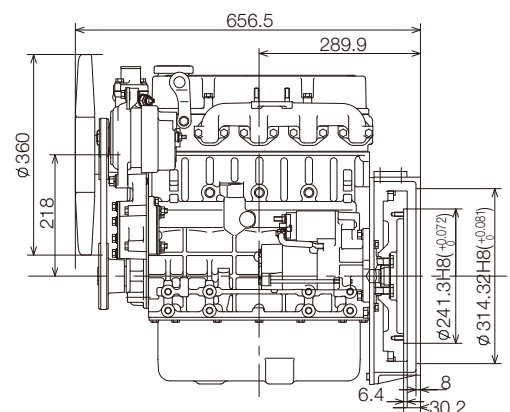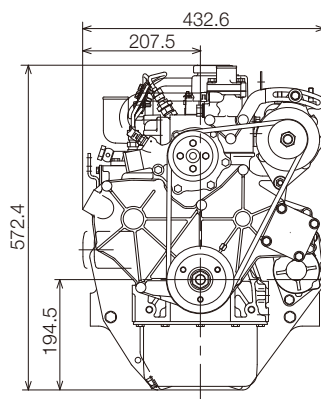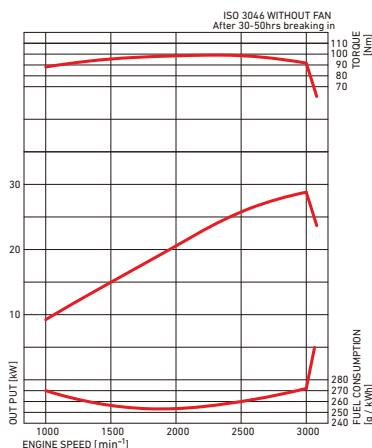

More information

Contact your local dealer for more information regarding Mitsubishi Diesel Engines and optional equipment or, visit engine-genset.mhi.com

© Mitsubishi Turbocharger and Engine Europe B.V. | This specification may be revised without prior notice. All pictures shown are for illustration purpose only.

MOVE THE WORLD FORWARD **MITSUBISHI**
HEAVY
INDUSTRIES
GROUP