














Project Name:

Date:

Description	Profile	Color	Calculations	Total
(A) <b>DECRA Tile</b> 20 panels per square 14-1/2" exposure - min pitch 3:12			Squares x 20 = Panels (8-12% Waste Factor)	
(A) <b>DECRA Shake</b> 22.4 panels per square 12-5/8" exposure - min pitch 3:12			Squares x 22.4 = Panels (8-12% Waste Factor)	
<b>DECRA Tile Panel Vent</b>			<b>Ventilation Calculator</b> available at <a href="http://www.decra.com">www.decra.com</a>	
<b>DECRA Shake Panel Vent</b>			<b>Ventilation Calculator</b> available at <a href="http://www.decra.com">www.decra.com</a>	
(B) <b>① Tile Hip &amp; Ridge</b> <b>② Shake Hip &amp; Ridge</b>	 14-1/2" exposure   12-5/8" exposure		Linear Feet x 12 ÷ Exposure = Pieces Needed As needed for hip, ridge & rake/gable	
<b>Tile End Cap</b> <b>Shake End Cap</b>	 Tile   Shake		As needed for closure at hip, ridge & rake/ gable at eave	
<b>DECRA Ridge Vent</b> (2) 20' rolls / package	 (2) 2-1/2" W x 1" H x 20' L		Linear Feet Ridge ÷ 20 (2) = Rolls Needed <b>Ventilation Calculator</b> available at <a href="http://www.decra.com">www.decra.com</a>	
(C) <b>3.5" Fascia Metal (Eave) Flashing</b> <b>5" Fascia Metal (Eave) Flashing</b> 6'6" Length			Linear Feet ÷ 6 = Pieces Needed (Includes 6" Overlap)	
(D) <b>Valley Metal</b> "W" Style Valley 6'6" Length		"W": Brown Paint "U": Stone Coat	(When estimating allow for 6" overlap)	
<b>Valley Metal</b> "U" Style Valley 6'6" Length				
(E) <b>Underpan</b> Tile 16-1/2" x 24" Shake 14-5/8" x 24" (Use with Non-Lead Pipe Jacks)	 Tile   Shake	n/a	1 per Roof Penetration	
(F) <b>Side Flashing</b> Roof-to-Wall Counter Flashing	 6'6" Length		Linear Feet ÷ 6 = Pieces Needed (Includes 6" Overlap)	
<b>Flat Sheet</b> 16" x 54"				
<b>Color Coordinated Corrosion<sup>1</sup></b> <b>Resistant Screws*</b> #9 Hex (1/4" diameter) x 1-1/2" long	<b>500 pc / bag</b> <b>4 bags / box</b>		1 Bag Per 4 Squares	
<b>Touch-Up Kit</b> or <b>5 lb. Bag of Chip</b> Use at penetrations, transitions & panels	<b>Bag of stone chip &amp; cartridge of roof sealant</b> or <b>5 lb. Bag of Chip</b>			
<b>2x2 Timber Battens<sup>2</sup></b> (Non-Treated) (Sourced Locally)	<b>100 Linear Feet per Square on Tile</b> <b>110 Linear Feet per Square on Shake</b>	n/a		
<b>1x4 Counter Battens<sup>2</sup></b> (Sourced Locally)	<b>60 Linear Feet per Square</b> (Use when roofing "over" irregular existing materials to level the deck)	n/a		

<sup>1</sup>If nails are used in lieu of screws for panel fastening, use black 8d corrosion resistant box nails, full head, sourced locally.



<sup>2</sup>Battens and counterbattens use 16d common nails.

 Colors: (Tile) Charcoal, Chestnut, Garnet, Granite Grey, Sea Green, Shadowwood, Terracotta, Weathered Timber  
 (Shake) Charcoal, Chestnut, Granite Grey, Sea Green, Shadowwood, Weathered Timber

 \*CONSULT LOCAL BUILDING CODES. \*\*HIGH WIND AREAS REQUIRE ADDITIONAL FASTENERS. COPPER AND LEAD ACCESSORIES ARE NOT TO BE USED DUE TO DISSIMILAR METAL REACTION.  
 This estimate is provided in good faith and should not be assumed to reflect the exact components required to roof this plan. DECRA Roofing Systems will not be held liable for the accuracy of this estimate.

www.decra.com

- (A) Field Panels**  
(8-12% waste)  
DECRA Tile  
20 panels per square  
DECRA Shake  
22.4 panels per square
- (B) Hip & Ridge (hip, ridge, rake/gable)**  
Tile Hip & Ridge (barrels)  
14-1/2" exposure  
Shake Hip & Ridge  
12-5/8" exposure
- (C) Fascia Metal (Eave) Flashing 3.5"**  
vertical face (tear-off or new) 5"  
vertical face (roof over)
- (D) "W" & "U" Valley Metal, 6' 6" lengths**
- (E) Underpan**  
Use with non-lead pipe jacks Tile  
16-1/2" x 24"  
Shake 14-5/8" x 24"
- (F) Side Flashing**  
4" Face, "Z" Bar counter flashing

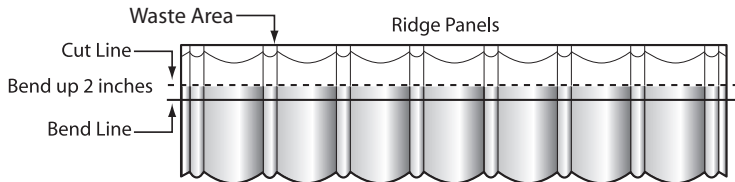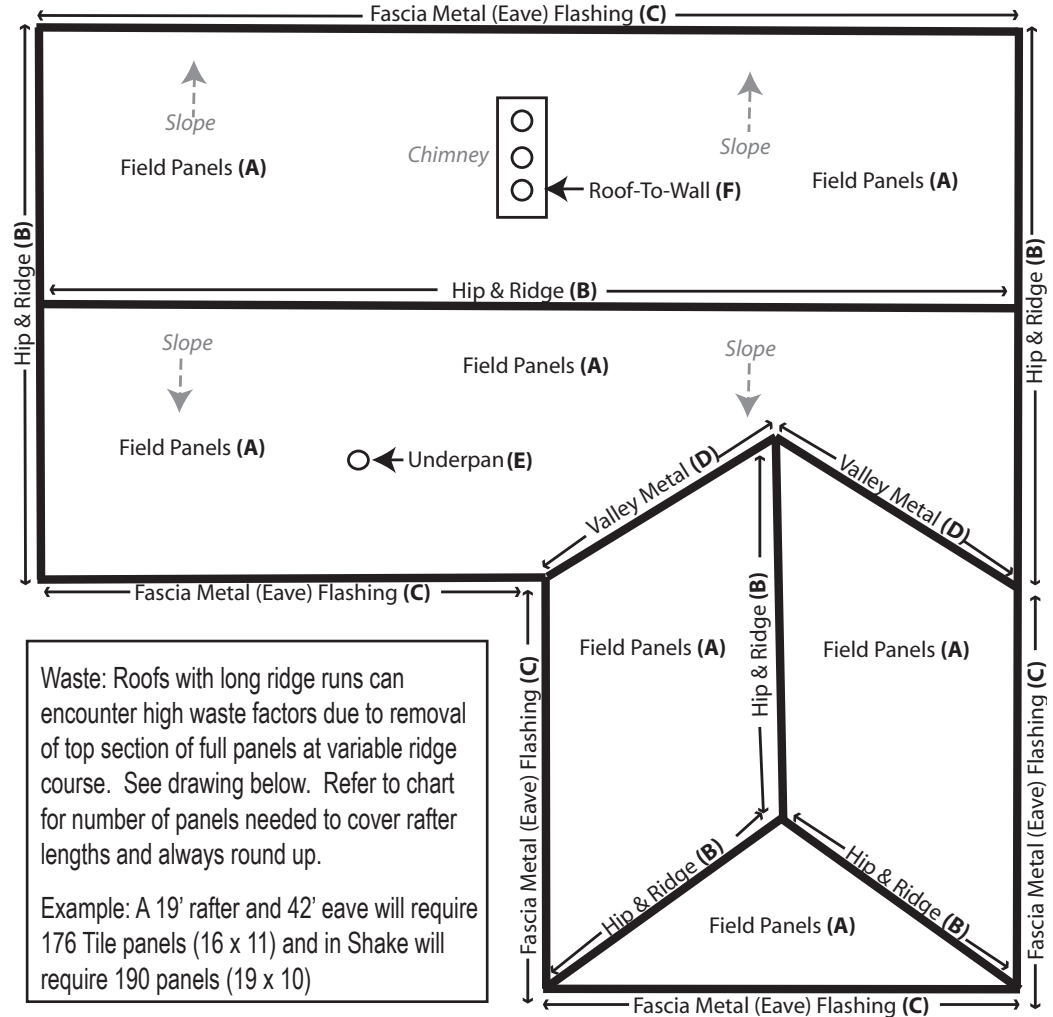

- ✓ Tin Snips
- ✓ Tape Measure
- ✓ Nail Gun
- ✓ Circular Saw
- ✓ Screw Gun
- ✓ Roofing Grade Sealant/Adhesive
- ✓ Galvanized Pipe Jacks (No Lead)
- ✓ Touch-Up Kits
- ✓ Batten Fasteners (16d Nails or 3-1/2" Screws)
- ✓ Observe Local Code Requirements

Cutter	DECRA Bender	Batten Spacers
Tile & Shake	Tile & Shake	14-1/2" or 12-5/8"
Weight 75 lbs	Weight 150 lbs	3 lbs/each

Panels Needed			
Tile		Shake	
Rafter Length	Eave Length	Rafter Length	Eave Length
1' 2"	1 4' 2"	12.5"	1 4' 3"
2' 4.5"	2 8' 4"	2' 1"	2 8' 6"
3' 7"	3 12' 6"	3' 1.75"	3 12' 9"
4' 9.5"	4 16' 8"	4' 2.25"	4 17'
6'	5 20' 10"	5' 3"	5 21' 3"
7' 2.5"	6 25'	6' 3.5"	6 25' 6"
8' 5"	7 29' 2"	7' 4"	7 29' 9"
9' 7.5"	8 33' 4"	8' 4.75"	8 34'
10' 10"	9 37' 6"	9' 5.5"	9 38' 3"
12'	10 41' 8"	10' 6"	10 42' 6"
13' 3"	11 45' 10"	11' 6"	11 46' 9"
14' 5.5"	12 50'	12' 7.25"	12 51'
15' 8"	13 54' 2"	13' 8"	13 55' 3"
16' 10.5"	14 58' 4"	14' 8.5"	14 59' 6"
18'	15 62' 6"	15' 9"	15 63' 9"
19' 3.5"	16 66' 8"	16' 9.75"	16 68'
20' 6"	17 70' 10"	17' 10.5"	17 72' 3"
21' 8.5"	18 75'	18' 11"	18 76' 6"
22' 11"	19 79' 2"	19' 11.75"	19 80' 9"
24' 1.5"	20 83' 4"	21'	20 85'

Use as guide only

For Installation Questions Call  
DECRA Roofing Systems at 800-258-9740