




# ACCLAIM 2

Portable Lectern & Sound System

## Perfect for...

- Hospitality Meeting Rooms
- Speaking Engagements
- Awards & Ceremonies
- Indoor & Outdoor Events
- Houses of Worship
- Presentations
- Seminars
- Meetings
- City Council Meetings
- Libraries
- Press Conferences
- Schools & Universities
- Cemeteries & Funerals
- and more!

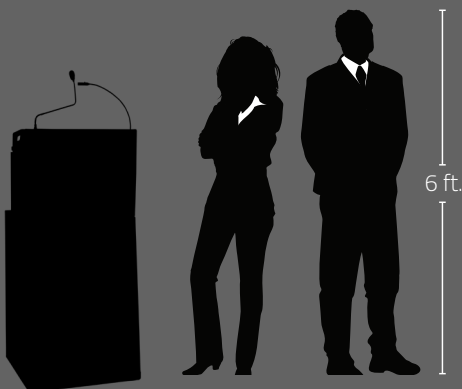


## TECH SPECS


- 113 dB of clear sound
- 22W AC/DC
- 1.9 GHz wireless microphone frequency
- 150' + wireless microphone range
- Detachable 25" gooseneck mic
- 1/4" line input & output
- USB gooseneck LED reading light
- Built-in rechargeable Lithium Ion battery
- One 8" neodymium woofer
- One bullet horn tweeter
- External speaker output powers optional companion speaker

## FEATURES

- Reach crowds of 500+
- Connect up to four wireless mics
- Tabletop stores in optional rolling base
- Built-in rechargeable batteries operate 6 - 8 hours on a single charge

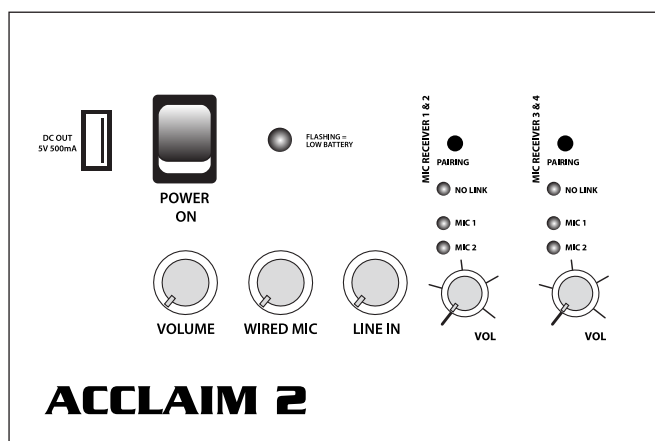

(ACL2-U4 Upper Panel)

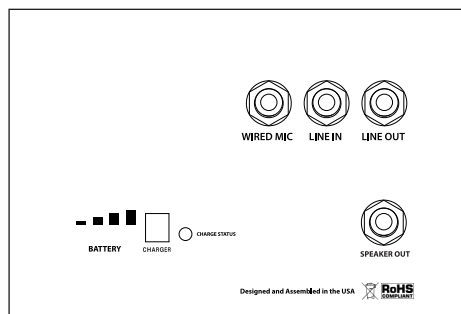

(Lower Panel)

Acclaim 2 Models	
ACL2	Acclaim 2 tabletop lectern
ACL2-U2	Acclaim 2 tabletop lectern with built-in dual wireless mic receiver
ACL2-U4	Acclaim 2 tabletop lectern with two built-in dual wireless mic receivers
ACL2-BASE	Acclaim 2 base & transporting case
Microphones	
WH-LINK	Wireless handheld mic (1.9 GHz)
WB-LINK	Wireless belt pack transmitter (1.9 GHz)
HBM-LINK	Headband mic (3.5 mm plug)
CM-LINK	Collar mic (3.5 mm plug)
EM-LINK	UltraLite mic (3.5 mm plug)
LM-LINK	Lapel mic (3.5 mm plug)
MIC-90P	Wired handheld mic with 20 ft. cable (1/4" plug)
LM-618	Gooseneck mic (25")

Technical Specifications	
Rated Power Output	22 watts AC/DC
Max SPL @ Rated Power	113 dB @ 1 meter
Frequency Response	60 Hz – 17 kHz ± 3 dB
Wireless Frequency	1.9 GHz DECT
Microphone Wireless Range	300' + line of sight
USB	5V 500mA
Battery	One 12V LFP rechargeable batteries, 7.0 AH
Charger (RC-2)	19V DC / universal input / 60 watts (110VAC - 240 VAC, 50 - 60Hz)
Warranty (Woodwork)	2 years
Warranty (Electronics)	6 years
Inputs	
Lectern Microphone	Lo-Z, balanced phantom power, XLR
Wired Microphone	Lo-Z, unbalanced, 1/4" phone
Line Input	Hi-Z, unbalanced, 1/4" phone
Outputs	
Line Output (post fader)	Lo-Z, 1/4" phone
Speaker Out	4W, unswitched, 1/4" phone, 20W max
Dimensions	
Base (HWD)	30.5" x 21.5" x 19" (77.5 x 54.6 x 48.3 cm)
Tabletop Lectern (HWD)	21.5" x 15.5" x 8.5" (54.6 x 39.4 x 21.6 cm)
Weight	
Base	42.5 lbs / 19.3 Kg
Tabletop Lectern	29.5 lbs / 13.4 Kg

LM-618 Technical Specifications	
Mic Element Type	Electret Condenser (requires phantom power)
Polar Pattern	Unidirectional, Cardioid
Frequency Response	500 - 18,000 Hz
Sensitivity	-70 ± 3 dB (0 dB = 1 volt/microbar)
Output Impedance	600 ohms ± 30% @ 1,000 Hz (Balanced)
Operating Voltage	9 to 52 Volts DC Phantom
Maximum SPL	130 dB
Signal-to-Noise Ratio	40 dB @ 1kHz
Connector	3-pin Male XLR
Windscreen	Black Urethane Foam
Dimensions (HW)	25" x 0.5" (58.42 x 2.54 cm)
Weight	6.5 oz (0.18 kg)



(Features & Specifications Subject to Change Without Notice)