




LIBERTY 2

Portable Sound System



Perfect for...

- Indoor & Outdoor Events
- Schools & Universities
- Military Training & Ceremonies
- Sporting Events
- Graduations
- Auditoriums
- Assemblies
- House of Worship
- Parks and Recreation
- Auctions
- Fitness Centers
- Parades & Community Celebrations
- Ceremonies
- Rental
- Public Gatherings
- Weddings
- Funerals
- Cemeteries
- Libraries
- Press Conferences
- Camps
- and more!

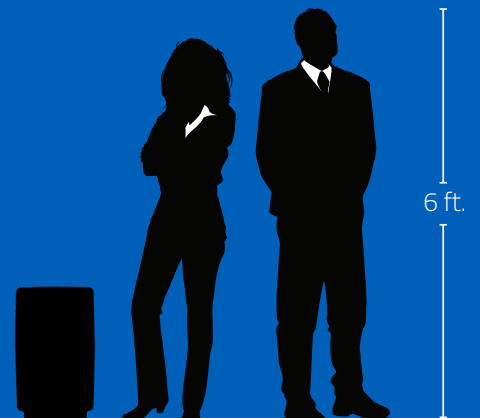


TECH SPECS

- 117 dB of clear sound
- 200W AC/DC RMS
- 1.9 GHz wireless microphone frequency
- 300' + wireless microphone range
- Two universal mic inputs
- 1/4" & 3.5 mm AUX line input
- 1/4" line output

FEATURES

- Built-in rechargeable Lithium Ion batteries
- One 10" woofer
- One ceramic compression driver
- External speaker output powers optional Liberty 2 companion speaker
- Reach crowds of 1,500+
- Connect up to four wireless mics
- Anchor AIR wireless companion speaker compatible
- Built-in Class 1 Bluetooth
- Built-in rechargeable batteries operate 6 - 8 hours on a single charge

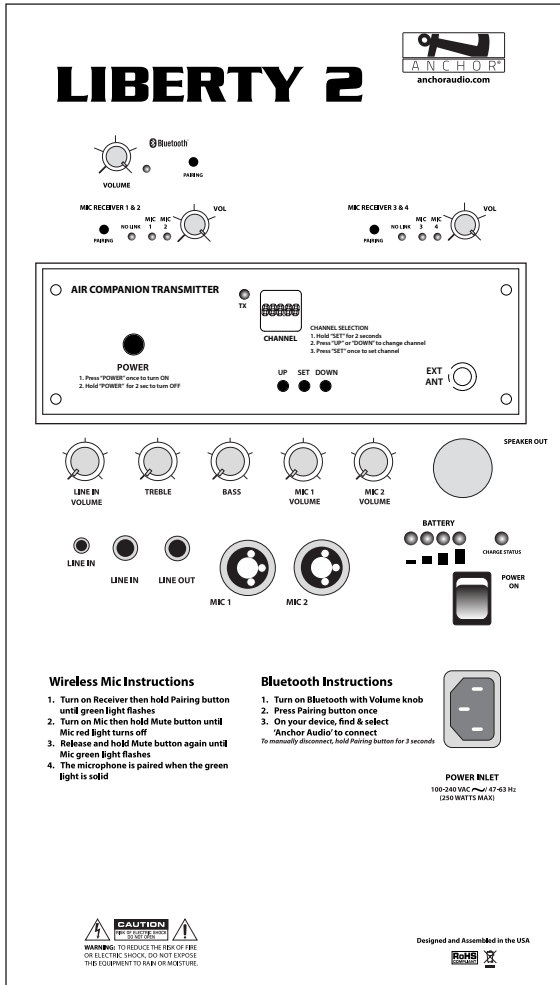

(LIB2-XU4 Back Panel)

| Liberty 2 Models | |
|------------------|---|
| LIB2 | Liberty 2 with built-in Bluetooth |
| LIB2-U2 | Liberty 2 with built-in Bluetooth & dual wireless mic receiver |
| LIB2-U4 | Liberty 2 with built-in Bluetooth & two dual wireless mic receivers |
| LIB2-X | Liberty 2 with built-in Bluetooth & AIR wireless transmitter |
| LIB2-XU2 | Liberty 2 with built-in Bluetooth, AIR wireless transmitter & dual wireless mic receiver |
| LIB2-XU4 | Liberty 2 with built-in Bluetooth, AIR wireless transmitter & two dual wireless mic receivers |
| LIB2-AIR | Liberty 2 AIR wireless companion speaker |
| LIB2-COMP | Liberty 2 unpowered wired companion speaker |

| Microphones | |
|-------------|---|
| WH-LINK | Wireless handheld mic (1.9 GHz) |
| WB-LINK | Wireless belt pack transmitter (1.9 GHz) |
| HBM-LINK | Headband mic (3.5 mm plug) |
| CM-LINK | Collar mic (3.5 mm plug) |
| EM-LINK | UltraLite mic (3.5 mm plug) |
| LM-LINK | Lapel mic (3.5 mm plug) |
| MIC-90 | Wired handheld mic with 20 ft. cable (XLR plug) |

| Technical Specifications | |
|----------------------------------|--|
| Rated Power Output | 200 watts AC/DC RMS |
| Max SPL @ Rated Power | 117 dB @ 1 meter |
| Frequency Response | 60 Hz – 15 kHz ± 3 dB |
| Microphone Wireless Frequency | 1.9 GHz DECT |
| Microphone Wireless Range | 300' + line of sight |
| Line Output (post fader) | Isolated, 600Ω, 1/4" phone |
| Mic Inputs | Lo-Z, balanced, XLR & 1/4" 34V DC condenser mic (phantom) power Hi-Z (10 KΩ), unbalanced, 1/4" phone |
| Line Inputs | Balanced Mono 1/4" & Unbalanced Stereo 3.5 mm |
| Speaker Out | 4-pole Neutrik Speakon® jack |
| AC Power Reqs. | 100 – 240 VAC, 50/60 Hz, 250W max |
| Battery | Two 12V LFP rechargeable batteries, 7.5 AH |
| Dimensions (HWD) | 23" x 14" x 11.5" (58.4 x 35.6 x 29.26 cm) |
| Weight | 28 lbs / 12.7Kg |
| Warranty | 6 years |
| Sensitivity For Rated Output | |
| Lo-Z Microphone | -52 dBV (2.5 mVrms) |
| Hi-Z Microphone | -43 dBV (7.5 mVrms) |
| Auxiliary (line) | -14 dBV (200 mVrms) |
| LIB-AIR Technical Specifications | |
| AIR Frequency Range | 902 - 928 MHz |
| AIR Wireless Range | 300' + line of sight |
| Speaker In | 4-pole Neutrik Speakon® input |



(Features & Specifications Subject to Change Without Notice)

Designed and Assembled in the USA