



PORTACOM

Wired Intercom System

Perfect for...

- Theaters
- Event Coordination
- School Plays
- Broadcast Studios
- Event Production
- House of Worship
- Musicals
- and more!



TECH SPECS

- Two channel, wired full duplex intercom
- Up to 50 headset capacity
- Heavy duty 4-pin XLR connector for headsets
- Heavy duty 3-pin XLR connector for cables

FEATURES


- AC base station powers wired belt packs
- Call light button
- Choice of single or dual muff headset
- Durable, lightweight belt packs
- Portable or rackmountable
- Easy to setup and operate



PC-2000 Power Console



BP-2000 Belt Pack

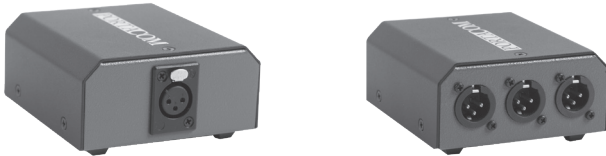

B3-2000 Branch Box

PortaCom Packages

COM-40FC	Includes four BP-2000, choice of four headsets, PC-2000, and a sturdy cardboard carrying case
COM-40FC/C	Includes four BP-2000, choice of four headsets, PC-2000, a sturdy cardboard carrying case, and four EX-50M
COM-60FC	Includes six BP-2000, choice of six headsets, PC-2000, B3-2000, and a sturdy cardboard carrying case
COM-60FC/C	Includes six BP-2000, choice of six headsets, PC-2000, B3-2000, a sturdy cardboard carrying case, and seven EX-50M

System Components

PC-2000	PortaCom power console
BP-2000	PortaCom belt pack
H-2000	Intercom headset - dual muff
H-2000S	Intercom headset - single muff
B3-2000	PortaCom branch box for additional users
EX-50M	Male/female XLR cable - 50 ft.
PGM-2000	Program mixer



(Features & Specifications Subject to Change Without Notice)

Designed and Assembled in the USA

Technical Specifications

Normal Line Level	-15 dBV
Signal-to-Noise-Ratio	-65 dBV
Distortion	< 0.5%
Connecting Cables	Standard 1-pair shielded mic cable with 3-pin XLR (heavy-duty cable recommended for runs over 250 ft.)
Compatibility	Generally compatible with industry standard system (call for info)
BP-2000 - PortaCom Belt Pack	
Input Line Connector	3-pin XLR female
Headset Connector	4-pin XLR male
Bridging Impedance	10k min
DC Current Reqs.	20 mA max
Dimensions (HWD)	4" x 3.5" x 2" (10.2 x 8.9 x 5.1 cm)
Weight	0.5 lb / 0.22 kg
Warranty	2 years
H-2000/H-2000S - Dual Muff / Single Muff Headset	
Connector	4-pin XLR female
Microphone Type	Dynamic, low impedance
Dimensions (HWD)	3.5" x 7.4" x 7.9" (8.9 x 18.8 x 20 cm)
Weight	Dual: 1 lb / 0.5 kg Single: 0.8 lb / 0.4 kg
Warranty	2 years
B3-2000 - Branch Box	
Input	One 3-pin XLR female
Output	Three 3-pin XLR male
Dimensions (HWD)	1.9" x 4.1" x 4.25" (4.8 x 10.4 x 10.8 cm)
Weight	1.2 lbs / 0.54 kg
Warranty	2 years
PC-2000 - Power Console	
Output Connectors	3-pin XLR - four male
Voltage Output	22 VDC to belt packs
Max. Current Capacity	400 mA
Max. Belt Packs	Twenty BP-2000 belt packs
Input Power Reqs.	24 VAC, 50/60 Hz, 750 mA, 30-40 VDC, 500 mA
AC Power Adapter	AC-20
Input Voltage	120 VAC, 60 Hz
Output Voltage / Current	24 VAC @ 750 mA
Dimension (HWD)	1.75" x 8.5" x 4.5" (4.45 x 21.6 x 10.2 cm)
Weight	3.6 lbs / 1.6 kg
Warranty	2 years