66 SERIES FFC

Multi FFC Cartridge

The 66 Series FFC housing range is specifically designed for use with large diameter SupaPleat FFC and SupaSpun FFC cartridges to provide a liquid filtration system that offers maximum efficiency, high flow rates and long life. This range of multi-cartridge housings can accommodate 3, 4, 5 and 7 filter cartridges in either 40" or 60" lengths. The cartridges are normally operated in 'out to in' mode.

The housings are designed to be used in a horizontal orientation and have a hinged and bolted closure to enable easy opening and closing. These housings are particularly suited to large scale high flow applications. The use of high surface area large diameter cartridges, instead of standard diameter cartridges, can greatly reduce the time required for filter change-out.

These high quality 316L stainless steel housings come fitted with a built-in stand and are available with a choice of connection types and sizes. To provide maximum convenience and safety, vent and drain ports are provided both upstream and downstream and the housing is fitted with lifting lugs. The housings are finished with a high quality external bead blast.



The **66 Series FFC** housings can accommodate filters manufactured with either polypropylene of glass microfibre media and with removal ratings of $0.5-90\mu m$. Therefore they are suitable for a wide range of applications including water treatment and the production of beverages, chemicals and pharmaceuticals.

Product Features

- Designed for high flow systems
- Easy and quick cartridge change-out
- Suitable for 3, 4, 5 or 7 cartridges
- Available for 40" or 60" filters
- Manufactured from 316L stainless steel
- High quality finish
- Each housing is hydrostatically pressure tested
- Available with a range of connection types and sizes
- Supplied with a built-in stand
- Rated at FV/10 bar in liquids
- PED and ATEX Compliant CE Marked

Features and Benefits

- Designed for SupaPleat FFC and SupaSpun FFC cartridges for maximum flow rates
- Accommodates 3, 4, 5 and 7 cartridges of either 40" or 60" length so suitable for a wider range of applications
- Utilises large diameter cartridges allowing quick filter change-out
- · Operated in the horizontal orientation and fitted with a hinged and bolted closure for easy access
- Each housing is etched with a unique serial number for full traceability
- Full housing customisation service available

Product Range

Amazon Filters design and manufacture an extensive range of liquid filtration systems, providing one of the widest selections of filtration vessels, depth filters and pleated cartridges available today, ensuring excellent process and filter compatibility. As one of Europe's leading manufacturers of filtration systems, Amazon Filters is able to offer a solution to meet all filtration requirements. Amazons' filters are manufactured in clean room conditions and all products come with detailed Product Validation Guides and Technical Support documentation.





66 Series FFC Technical Data

Maximum Operating Conditions

Pressure Range: FV/10 bar g
Temperature Range: -10°C/110°C

Materials of Construction

Body and Closure: 316L St. Steel
Vessel Finish Pickle, passivate and external bead blast

Connections

Inlet/Outlet: 6" - 12" Flange
Vent: 1" BSPM with Cap
Drain: 1" BSPM with Cap
Lid vent ½" BSPF with Plug

| Model | Dimensions | | | | | Volume | Dry |
|----------------|------------|-----|-----|-----|------|----------|--------|
| | Α | В | С | D | Е | (Litres) | Weight |
| 66034PHD40C1GE | 1647 | 453 | 246 | 160 | 1000 | 193 | 185 |
| 66044PHD60C1GE | 1657 | 518 | 261 | 120 | 1000 | 260 | 249 |
| 66056PHDA1C1GE | 2193 | 593 | 309 | 175 | 1600 | 410 | 350 |
| 66076PHDA2C1GE | 2181 | 596 | 289 | 200 | 1600 | 586 | 536 |

PED Status: Compliant with 2014/68/EU


Fluid Groups: Liquids Group 1 + 2

Marking: CE Marked

Exceptions: Group 1 liquids - Explosive

ATEX: Compliant with 2014/34/EU, level CE Ex II 2 GD c X

Technical drawings for each individual housing showing dimensions, volume, weights, maximum temperatures and design pressures available on request.

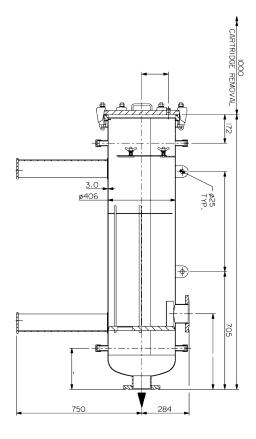

AMAZON FILTERS LTD.

Albany Estate, Camberley, Surrey, GU16 7PG, ENGLAND

Tel: +44 (0) 1276 670 600 Email: sales@amazonfilters.co.uk Web: www.amazonfilters.com