

# 72 SERIES

## Hygienic Single Filter Housing



The **72 Series** Hygienic single cartridge housing is available for elements up to 30" long. The 'T' style configuration is ideally suited to small pilot scale or laboratory based processes for pressures up to 10 bar g.

Base mounted, this free standing conventionally styled housing will suit processes where there is a need to allow easy access to all internal areas. This helps ensure the general cleanliness of the process system in which the filter is to operate.

Having no loose internal components ensures easy, fast sanitisations and clean down procedures.

The **72 Series** housing will accept the full range of Amazon Single Open End industry standard cartridges ranging from 0.03 to 40µm with nominal lengths of 10, 20 and 30".

### Product Features

- 'T' style construction with a high specification hygienic finish, electropolished inside and out
- Quick release Vee clamp closure for ease of access
- No loose internals for trouble free operation
- 6 different vent options
- Staubli connections available
- PED and ATEX compliant
- CE Marked



## Features and Benefits

- Standard single open end cartridge fitting, using Bayonet lock code 7 for forward and reverse flow
- 316L construction for maximum corrosion resistance
- Every housing is etched with a serial number for full traceability
- Wide range of options available for the connection size and style, cartridge lengths and materials of construction
- 72B version with single piece domes on 20 & 30" options

## Product Range

Amazon Filters design and manufacture an extensive range of liquid filtration systems, providing one of the widest selections of filtration vessels, depth filters and pleated cartridges available today, ensuring excellent process and filter compatibility. As one of Europe's leading manufacturers of filtration systems, Amazon Filters is able to offer a solution to meet all filtration requirements. Amazons' filters are manufactured in clean room conditions and all products come with detailed Product Validation Guides and Technical Support documentation.



**AMAZON**

# 72 Series Technical Data

## Maximum Operating Conditions

Pressure Range:	Liquid:	FV / 10 bar g
	Gas Group 1:	FV / 10 bar g - 5" 10" 20" & (72B 20") FV / 7 bar g - 30"
Temperature Range:	Gas Group 2:	FV / 10 bar g
		-10°C / 150°C

## Materials of Construction

Body and Closure:	316L St. Steel
Clamp:	304 St. Steel

## Finish

Vessel:	0.8µm Ra mechanically polished inside and out + final Electropolish
---------	---

## Connections

Inlet / Outlet:	1" Tri Clamp
-----------------	--------------

Model	Dimensions (mm)					Volume (Litres)	Dry Weight (Kg)
	A	B	C	D	E		
720107VF10L1PS	386	95	-	196	250	1.6	4.2
720117VF10L1PS	505	93	-	195	350	2.6	4.6
720127VF10L1PS	760	93	-	195	600	4.6	6.4
720137VF10L1PS	1015	93	-	195	600	6.6	7.36

## PED Status:

Compliant with 2014/68/EU  
Gas Group 1 + 2  
Liquids Group 1 + 2

Marking:

CE


Exceptions:

Group 1 liquids - Explosive

## ATEX:

Compliant with 2014/34/EU, level CE Ex II 2 GD c X

Technical drawings for each individual housing showing dimensions, volume, weights, maximum temperatures and design pressures available on request.

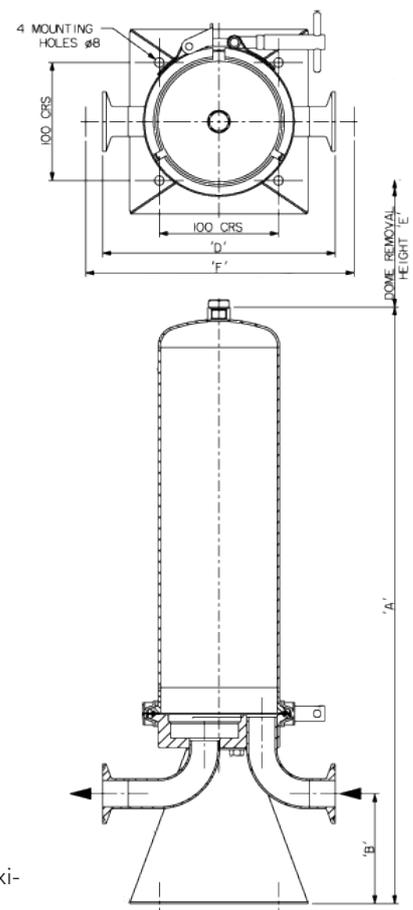

# AMAZON FILTERS LTD.

Albany Estate, Camberley, Surrey, GU16 7PG, ENGLAND

Tel: +44 (0) 1276 670 600 Email: sales@amazonfilters.co.uk Web: www.amazonfilters.com