

SUPAPLEAT FFC

Large Diameter High Flow Filters



SupaPleat FFC filters are high surface area cartridges offering maximum efficiency and exceptionally high flow capabilities.

Developed to suit large scale processes where high performance is required, the filters incorporate advanced pleated depth media providing low pressure loss and high dirt capacity. This makes SupaPleat FFC cartridges the ideal choice for a wide range of applications.

These large diameter pleated cartridges are manufactured from either polypropylene or borosilicate glass microfibre depth media. The standard range is manufactured using polypropylene end caps and internal



support core. Amazon Filters also offers cartridges manufactured with stainless steel cage and core and nylon end fittings. These are particularly suited for applications where higher temperature ratings are required or compatibility may be an issue. Thermal welding processes seal all components, eliminating adhesives and extractables and optimising cartridge integrity. In-house developments have optimised the pleat pack ensuring rigidity is maintained at all flow rates.

Product features

- High surface area polypropylene or glass fibre media operating in 'out to in' mode
- More robust stainless steel cage and core option available
- Nylon end caps option available
- Available with different connectors to allow retrofitting of existing high flow systems
- Special CRY Cryptosporidium grade designed for Food and Beverage applications
- All cartridges are thermally bonded and adhesive free
- Meets requirements on materials used for articles intended to come into contact with food as described in CFR Title 21, as well as the

appropriate European guidelines

- Manufactured under strict control with batch number identification, giving full traceability on all components
- Extended life versions available


Filter Housings

Amazon Filters manufactures a range of stainless steel and plastic housings for SupaPleat FFC cartridges including the 27 Series GRP

Glass Reinforced

Plastic housings with super duplex end fittings. This housing is particularly suited to brackish or seawater applications.

Please consult our Sales Office for further details on these ranges.

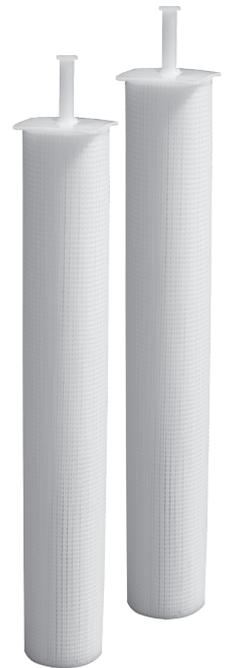

Features and Benefits

- High flow rates and long life to minimise filtration costs
- Up to 60" length filters allow quick cartridge replacement
- Absolute removal ratings (Beta 5000) for consistent and reliable performance
- XP - Extended life version for more challenging applications
- Available in numerous removal ratings (0.5 - 50µm) so suitable for a wide range of applications
- Cryptosporidium removal grade (CRY) with typical 10⁴ log reduction value
- Stainless steel cage and core and nylon end caps versions available for more aggressive processes

Industries and Applications

Food and Beverage	• Bottled water, Beers, Wines, Polishing lines, General clarification
Pharmaceutical	• Solvent discharge, Raw water supplies, batch transfers
Fine Chemicals	• Polymers, Acids, Bases, Solvents
Water Treatment	• Pre reverse osmosis, UV protection, Resin and carbon trap
Automotive	• Wash solutions, Cooling fluid, Blanking wash oils, Electrophoretic paints
Oil & Gas	• Water injection systems, Amine streams, Glycols
Power Generation	• Water treatment (boiler feed sweetening), return condensate lines

AMAZON

SupaPleat FFC Technical Data

Dimensions

Outside Diameter: 153mm
 Typical Surface Area: 5.2 - 10.7 m² per 40" filter

Maximum Operating Conditions


Temperature: 24PP / PS: 80°C
 24PN: 100°C
 24GP / GS: 80°C

Recommended Maximum Differential Pressure:
 Forward Flow: 4.0 Bar @ 20°C


Recommended change-out differential pressure: 2.5 Bar

Product validation guide available on request. All SupaPleat FFC cartridges are manufactured under strict control with batch number identification, giving full traceability on all components.

Flow Rates For Water - Media Only
 (40" Element)

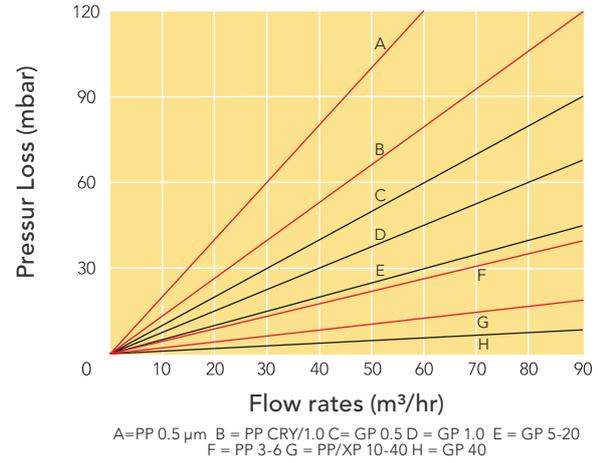

Fixed Pressure Drop Values for Cartridges

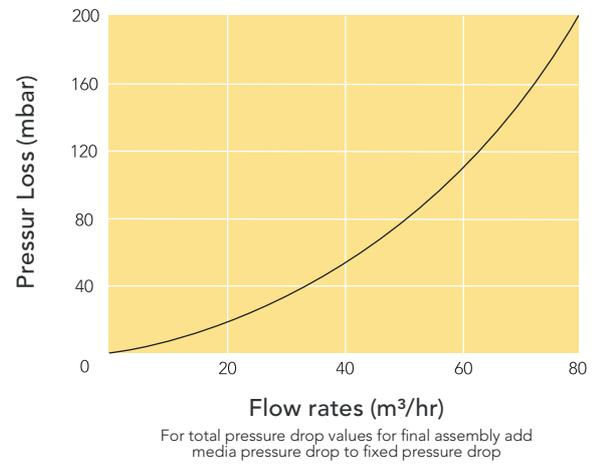

AMAZON FILTERS LTD.

Albany Estate, Camberley, Surrey, GU16 7PG, ENGLAND

Tel: +44 (0) 1276 670 600 Email: sales@amazonfilters.co.uk Web: www.amazonfilters.com

SupaPleat is a trademark of Amazon Filters Ltd.
 AMAZON FILTERS LTD. reserve the right to change specification without prior notice, as part of their continuous product development programme.