

SUBJECT: Super Lube® Multi-Purpose Grease

EFFECTIVITY DATE:

Super Lube® multi-purpose grease is qualified as a lubricant between the drive bearing and the plunger slot and as an assembly lubricant for internal rubber seals.


June 1, 2013

Affects all 100 series and 200 series Pumptec Pumps.

Also affects 300 series pumps operating below 500psi.



1cc packet, 1/2 oz tube, and 400 gram can.

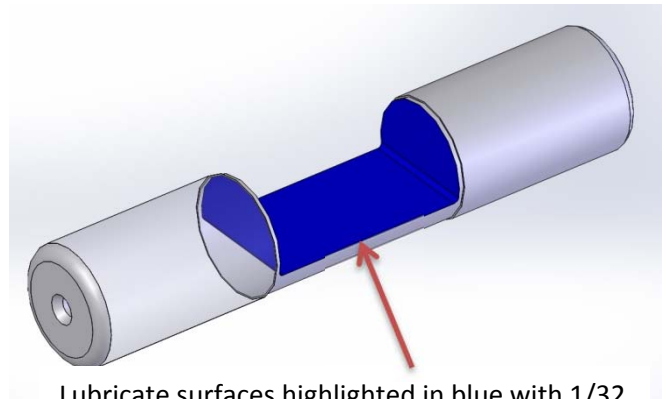

Lubricate surfaces highlighted in blue with 1/32 inch (.03") thin layer of lubricant. Make sure each surface is coated completely.

*1cc is enough to lubricate the plunger slot plus the seals for a complete pump rebuild.

SUMMARY:

Super Lube® Grease is a patented synthetic NLGI grade 2 heavy-duty, multipurpose lubricant with PTFE. Synthetic base fluids and the addition of PTFE micro powders combine to form a premium lubricant that provides longer life protection against friction, wear, rust and corrosion. Machinery lasts longer, downtime is reduced, and productivity is increased. **Super Lube®** is compatible with most other lubricants and will not run, drip, evaporate or form gummy deposits, and will not melt or separate.

Super Lube® is Food Grade, rated H-1 by the USDA and NSF for incidental food contact. It is an excellent Dielectric and operates over a temperature range from -45° to 450° F.

MSDS for Super Lube® Multi-Purpose Grease available at the following link:

<http://www.super-lube.com/files/pdfs/REACH%20MSDS%20Super%20Lube%20Grease.pdf>