

Pin-Hole Leak Clamp


Pin-Hole Leak Clamps have been developed for process piping repair in oil and gas process facilities.

Installation can be undertaken with minimal disruption to the pipework or operation of the system to which they are fitted. Designed for simple installation, Pin-Hole Leak Clamps are designed to provide a rapid and versatile solution for localised leak points.

Weights & Dimensions

Pipe Nominal Size	Maximum Pin-Hole Size (mm)	Model Number	Shipping Dimensions (mm)	Weight (Kgs)
2"	6	DAK-13-0001-0001	117 x 115 x 40	0.9
3"	6	DAK-17-0001-0001	138 x 144 x 40	1.1
4"	6	DAK-19-0001-0001	181 x 208 x 75	3.2
6"	12	DAK-21-0001-0001	242 x 249 x 75	3.9
8"	12	DAK-22-0001-0001	304 x 300 x 75	4.8
10"	12	DAK-23-0001-0001	365 x 300 x 75	5.4
12"	12	DAK-24-0001-0001	429 x 322 x 75	5.9
14"	12	DAK-25-0001-0001	472 x 300 x 75	6.8
16"	12	DAK-26-0001-0001	541 x 365 x 75	7.4
18"	12	DAK-27-0001-0001	567 x 389 x 75	7.4
20"	12	DAK-28-1000-0001	631 x 414 x 75	7.9
22"	12	DAK-29-0001-0001	694 x 404 x 75	8.5
24"	12	DAK-30-1000-0001	744 x 465 x 75	8.4
28"	12	DAK-32-1000-0001	854 x 516 x 75	9
30"	12	DAK-33-1000-0001	919 x 554 x 75	9.9
34"	12	DAK-35-1000-0001	1028 x 637 x 75	11
42"	12	DAK-39-1000-0001	1248 x 739 x 75	12.2
48"	12	DAK-42-1000-0001	1407 x 805 x 75	13

All data correct at time of publication

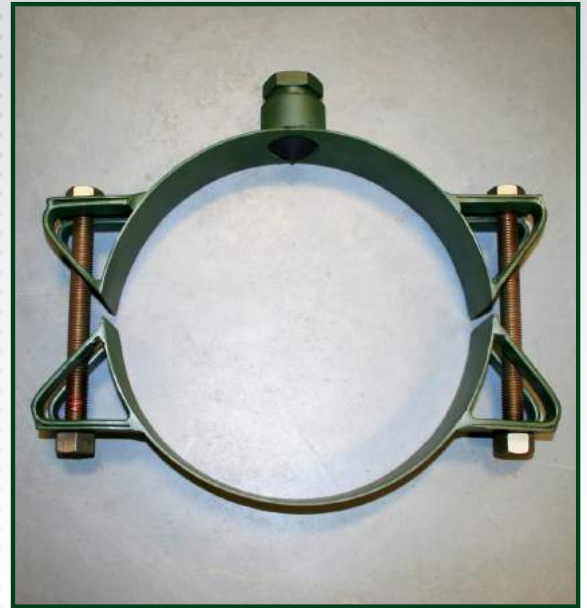

6" Pin Hole Leak Clamp

Key Features

- ◆ All pipe range sizes 2" upwards
- ◆ Pressure range: up to 153 Bar (900lbs)
- ◆ Maximum pin-hole size up to 12mm
- ◆ No preparation required
- ◆ Can be fitted onto live leak
- ◆ Simple to install
- ◆ Xylan coating provides excellent corrosion resistance

