

ABT-xLogOut-8c/f


EN 54-16

Relay output card for control slots ABT-xLogOut-8c and for function slots ABT-xLogOut-8f



1488-CPR-0500/W

3959/2020

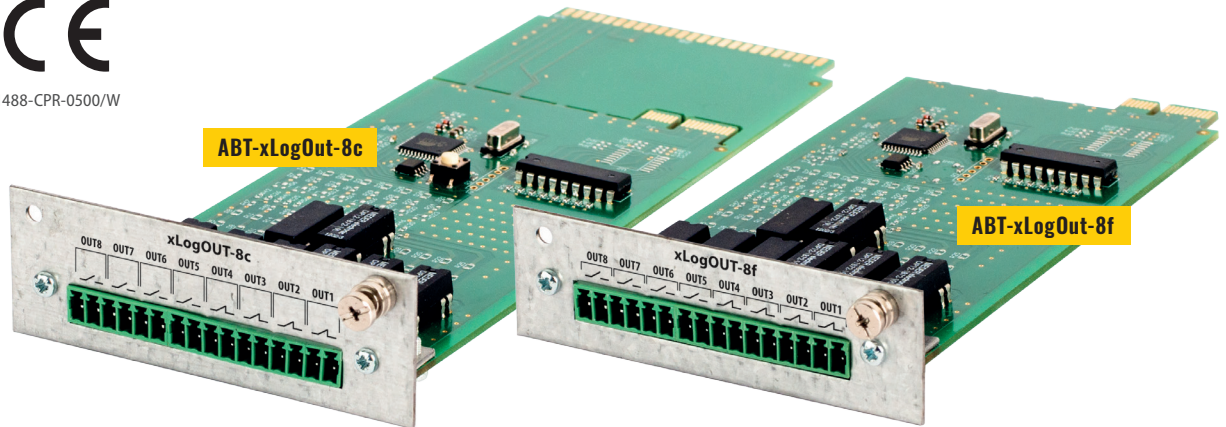

The logical output card has eight fully programmable relays which can be used

for acknowledge the various states of the Multives outside to other systems. The

channels from 1 to 4 are equipped with NC and channels from 5 to 8 with NO type of relays.

	ABT-xLogOut-8c/f	
Power supply	Internal from the Control Unit backplane	
Power consumption	10 mA at 48 V	
Number of logic outputs	8, each output galvanically isolated	
Type of outputs	4x NC 4x NO	
Connector type	16 pin screw terminal type PHOENIX, 3.5 mm	
Switching current (Max.)	0,5 A	
Switching voltage (Max.)	48 V	
Switching power (Max.)	20 W	
Operating temperature	0°C to 60°C	
Operating humidity	15% to 80% (non-condensing)	
Storage temperature	-20°C to 70°C	
Storage humidity	5% to 95% (non-condensing)	
Dimensions	ABT-xLogOut-8c – 70x215x25 (mm)	ABT-xLogOut-8f – 70x160x25 (mm)
Accessories	Connector with screw terminals 16 pins, the distance between the partitions of 3.5 mm	