

Energy UNO

LED Street/Area Luminaire

Rev. Date: 07 July 2021

Product Description

Designed as a complete street lighting system and optimized for LED light sources, it is distinguished by its extraordinary efficiency. Energy UNO provides the best lighting solution. Developed with three product sizes, four lumens package per size, a complete optical range, flux adjustment options and a wide range of light sources together with a comprehensive optical range, stand-alone flow control options and Zhaga connectivity. Energy can be mounted on a pole or bracket with an adjustability of 20° and with 5° increments. Adjustments can be done from outside without having to open the product cover

Applications: Urban and internal roads, pedestrian walkways and car parks.

Performance Summary

Efficacy: up to 160lm/W

Initial Delivered LED Lumens: up to 8600lm

Lifetime color consistency: 4SDM

Limited Warranty: 5 years on luminaire



Eg: TRSA-2-075-2L-407--A-SG-FX-S-S-00+ FXA10HA0-00001


Ordering Information

TRSA	2	075	2L	228	+	A	SG	FX	S	S	00
Product	Mounting	Optic	Lumen Package	CCT	Insulation Class	Voltage	Finish	Options	Variant	Protection	Cable length
TRSA	2 horiz/vert tenon 60mm 3 horiz/vert tenon 76mm	075 Narrow Street 0.75 (T2S) 100 Medium Street 1.00 (T2S) 125 Comfort Street 1.25 (T2S) 150 Wide Street 1.50 (T3S) 200 Extra Wide Street 2.00(T4S) SCP Street & Cycle Path class P(T2S) AFN Area Flood Narrow ARS RotoSymmetric Area PCR Pedestrian Crossing Right PCL Pedestrian Crossing Left	2L Up to 2100lm 4L Up to 4300lm 6L Up to 6500lm 8L Up to 8600lm	228* 2200K CRI80 278 2700K CRI80 308 3000K CRI80 407 4000K CRI70 577* 5700K CRI70	+	A	SG Sapphire Gray BK* Black Textured WH* White Textured SV* Silver Textured	FX Fixed Output (setting on request) VM Virtual Midnight DL DALI CL Constant Lumen VMC Virtual Midnight+ Constant Lumen RF** Flux Regulator G** Lineswitch FX Fixed Output (setting on request) VM Virtual Midnight CL Constant Lumen VMC Virtual Midnight+ Constant Lumen	S Standard N* Nema Socket 7 pin Z Zhaga Socket/ D4i driver	S Standard SF Standard +Fuse U 10 kV UF 10 kV +Fuse	00 Standard no cable 01 Exit Cable 1 m 03 Exit Cable 3 m 06 Exit Cable 6 m 10 Exit Cable 10 m

*On request

**Options G and RF are not available for Nema Variant

ADAPTER	
KIT-TRS-LS-42/48-V0	Fitter kit to mount to 42 & 48 mm tenon

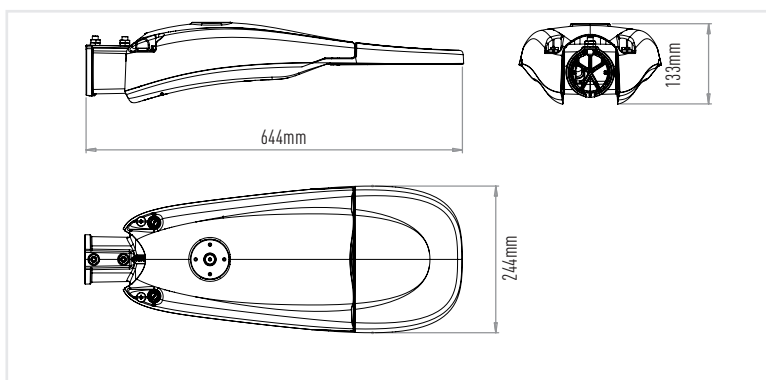

www.creelighting-europe.com

Ph. +39 055 343081

CREE LIGHTING

FEATURES

- Full cut-off optics and PCB LEDs compliant with Zhaga Book 15
- LED Lumen output up to 8600lm
- Zhaga Book 15 compliant LED module efficiency (excluding optical system): ≥ 185 lm/W
- Luminaire efficiency (including optical losses): up to 160 lm/W
- CCT: 3000K, 4000K, (2200K, 5700K @Ra80 and 2700K @Ra80 on request per MOQ)
- CRI Standard min. 70, CRI80 @3000K
- Initial Chromatic Selection: ≤ 4 -Step MacAdam ellipse or $\Delta u'v' \leq 0.003$ (LM80-08)
- Luminous flux maintenance factor: L90B10 up to $>100,000$ hours $T_a=25^\circ\text{C}$ (According to IESNA TM-21)
- Degree of protection optical compartment and wiring compartment: IP66 (IEC 60529)
- Optical compartment and wiring compartment impact resistance: $\geq \text{IK10}$ (EN 62262)
- Overvoltage protection: up to 10kV CM/DM according to EN 61000-4-5 and EN 61547
- Driver equipped with over-temperature protection for optimal performance and safety
- Power factor: ≥ 0.98 at full load
- Operating temperature: -40°C up to $+50^\circ\text{C}$
- Control options: Virtual Midnight(chronoSTEP
- reprogrammable via mains), DALI 2, Constant Flow, Flow Regulator, Lineswitch, D4i
- Available with fuse and 20mm Zhaga Book 18 connector

CONSTRUCTION AND MATERIALS

- Die-cast aluminum body with low copper content
- Power supply compartment accessible without the use of tools
- Removable wiring plate
- Knife disconnecter
- 4mm thick ultra clear transparent glass protection screen
- Replaceable PMMA lenses
- Replaceable LED board equipped with ESD protection
- Cable type H07RN-F (Cable length up to 10m)
- Easy installation: wiring compartment installed on the cover and pre-assembled integrated joint - to install the luminaire it is not necessary to open it if outgoing cable version,
- Practicality in ordinary and extraordinary maintenance: power supply compartment accessible and component holder plate removable without tools; lenses and LEDs easily removable and replaceable using a single tool.
- Luminaire assembled without the use of adhesives, completely disassembled and recyclable

WARRANTY AND CERTIFICATIONS

- Warranty: 5 years / 10 years on request
- CE mark/CB mark/ENEC mark/RoHs/RCM mark
- Risk group exempt in accordance with Standard CEI EN 62471 for photobiological safety (Tested IEC/TR62778)
- Compliant to: EN 60598-1; EN 60598-2-3
- Lead-free powder coatings with excellent exterior durability, conforms to the requirements:
 - Adhesion - test comply with ISO 2409
 - Salt spray - test NSS comply with ISO 9227
 - Accelerated Weathering - test UV comply with ISO 16474-2 (ex ISO 11507)
 - Constant humidity - test comply with ISO 6270-1

ELECTRICAL DATA*

Lumen Package	System Watts 220-240V	Total Current	Power Factor
		@230V, 50Hz	
2L	15W	0,07	0,94
4L	28W	0,125	0,97
6L	41W	0,181	0,98
8L	54W	0,238	0,98

* Electrical data at 25°C (77°F)

WEIGHT

WEIGHT	6,5 Kg
--------	--------

LMF LUXEON - RECOMMENDED LUMEN MAINTENANCE FACTORS (LMF)¹

Ambient	LMF iniziale	25K hr Projected ² LMF	50K hr Projected ² LMF	75K hr Calculated ³ LMF	100K hr Calculated ³ LMF
25°C	1	0,97	0,94	0,92	0,90

LMF DURIS - RECOMMENDED LUMEN MAINTENANCE FACTORS (LMF)¹

Ambient	LMF iniziale	25K hr Projected ² LMF	50K hr Projected ² LMF	75K hr Calculated ³ LMF	100K hr Calculated ³ LMF
25°C	1	0,99	0,98	0,98	0,97

¹ Lumen maintenance values calculated at 25°C , with TM-21 based on LM-80 data and on-site testing. DURIS for SCP optic 150 - PCR- PCL and LUXEON for 075, 100, 125 - 200 - AFN - ARS optics

² In accordance with IESNA TM-21-11, the values shown in the "projected" column represent interpolated and arc values within six times (6X) the total duration in hours of the tests (performed according to IESNA LM-80-08) to which the device has been subjected ((OUT) e.g. the LED chip).

³ In accordance with IESNA TM-21-11, the values shown in the column "calculated" are calculated based on a time span greater than six times (6X) the total duration in hours of the tests (performed according to IESNA LM-80-08) to which the device has been subjected ((OUT) e.g. the LED chip).

NEMAOPTIONS AVAILABLE

FX-N	NEMA 7 pin combined with FX programs (Fixed Power)	(on-off)
VM-N	NEMA 7 pin combined with VM programs (Virtual Midnight)	(on-off)
DL-N	Nema 7 pin connected to DALI 2.0 driver	(on-off + Dim)
CL-N	Nema 7 pin combined with CL programs (Constant Light Output)	(on-off)
VMC-N	Nema 7 pin combined with VM+CL	(on-off)

-- on-off: Nema allows for on-off control only

- on-off + Dim: Nema allows for on-off and dimming control

ZHAGA OPTIONS AVAILABLE

FX-Z	Zhaga Book 18 connector & D4i driver combined with FX programs (Fixed Power)
VM-Z	Zhaga Book 18 connector & D4i driver combined with VM programs (Virtual Midnight)
CL-Z	Zhaga Book 18 connector & D4i driver combined with CL programs (Constant Light Output)
VMC-Z	Zhaga Book 18 connector & D4i driver combined with VM+CL



Control options - Variant S - N(Optics 075 - 100 - 125 - 200 - AFN - ARS)

FX - FIXED OUTPUT					
Setting Code	System Watts W	Nominal flux (lm)			Description
		2700K	3000K	4000K	
LUMEN PACKAGE 8L					
FXA10HA0-00001	54	6872	7782	8640	FIXED OUTPUT 54W
FXA10HA0-00002	36	4847	5489	6094	FIXED OUTPUT 36W
FXA10HA0-00003	27	3729	4223	4689	FIXED OUTPUT 27W
LUMEN PACKAGE 6L					
FXA10FA0-00001	41	5220	5911	6562	FIXED OUTPUT 41W
FXA10FA0-00002	27	3682	4169	4629	FIXED OUTPUT 27W
FXA10FA0-00003	21	2833	3208	3561	FIXED OUTPUT 21W
LUMEN PACKAGE 4L					
FXA10DA0-00001	28	3429	3883	4311	FIXED OUTPUT 28W
FXA10DA0-00002	19	2419	2739	3041	FIXED OUTPUT 19W
FXA10DA0-00003	14	1861	2107	2340	FIXED OUTPUT 14W
LUMEN PACKAGE 2L					
FXA10BA0-00001	15	1694	1918	2130	FIXED OUTPUT 15W
FXA10BA0-00002	10	1195	1353	1502	FIXED OUTPUT 10W
FXA10BA0-00003	8	919	1041	1156	FIXED OUTPUT 8W

VM - VIRTUAL MIDNIGHT (Lumen package 8L - 6L)													
Setting Code	W Max	Nominal flux (lm)			W Med	Nominal flux (lm)			W Min	Nominal flux (lm)			Description
		2700K	3000K	4000K		2700K	3000K	4000K		2700K	3000K	4000K	
LUMEN PACKAGE 8L													
VMA10HA0-0013	54	6872	7782	8640	36	4847	5178	6094	27	3729	4223	4689	VM ON-54W / 21:00-36W / 24:00-27W / 04:00-36W/06:00-54W
VMA10HA0-0014	36	4847	5489	6094	24	3363	3592	4228	19	2543	2879	3197	VM ON-36W / 21:00-24W / 24:00-19W /04:00-24W/06:00- 36W
VMA10HA0-0015	27	3729	4223	4689	19	2543	2716	3197	15	1947	2205	2448	VM ON-27W / 21:00-19W / 24:00-15W / 04:00-19W/06:00-27W
VMA10HA0-0001	54	6872	7782	8640					27	3729	4223	4689	VM ON-54W / 22:00-27W / 06:00-54W
VMA10HA0-0002	54	6872	7782	8640					36	4847	5489	6094	VM ON-54W / 22:00-36W / 06:00-54W
VMA10HA0-0003	36	4847	5489	6094					19	2543	2879	3197	VM ON-36W / 22:00-19W / 06:00-36W
VMA10HA0-0004	36	4847	5489	6094					24	3363	3808	4228	VM ON-36W / 22:00-24W / 06:00-36W
VMA10HA0-0005	27	3729	4223	4689					15	1947	2205	2448	VM ON-27W / 22:00-15W / 06:00-27W
VMA10HA0-0006	27	3729	4223	4689					19	2543	2879	3197	VM ON-27W / 22:00-19W / 06:00-27W
VMA10HA0-0007	54	6872	7782	8640					27	3729	4223	4689	VM ON-54W / 00:00-27W / 06:00-54W
VMA10HA0-0008	54	6872	7782	8640					36	4847	5489	6094	VM ON-54W / 00:00-36W / 06:00-54W
VMA10HA0-0009	36	4847	5489	6094					19	2543	2879	3197	VM ON-36W / 00:00-19W / 06:00-36W
VMA10HA0-0010	36	4847	5489	6094					24	3363	3808	4228	VM ON-36W / 00:00-24W / 06:00-36W
VMA10HA0-0011	27	3729	4223	4689					15	1947	2205	2448	VM ON-27W / 00:00-15W / 06:00-27W
VMA10HA0-0012	27	3729	4223	4689					19	2543	2879	3197	VM ON-27W / 00:00-19W / 06:00-27W
LUMEN PACKAGE 6L													
VMA10FA0-0013	41	5220	5911	6562					21	2833	3208	3561	VM ON-41W / 21:00-27W / 24:00-21W /04:00-27W/06:00- 41W
VMA10FA0-0014	27	3682	4169	4629	27	3682	4169	4629	14	1931	2187	2428	VM ON-27W / 21:00-19W / 24:00-14W /04:00-19W/06:00-27W
VMA10FA0-0015	21	2833	3208	3561	19	2554	2892	3211	11	1479	1675	1859	VM ON-21W / 21:00-14W / 24:00-11W /04:00-14W/06:00-21W
VMA10FA0-0001	41	5220	5220	6562	14	1931	2187	2428	21	2833	3208	3561	VM ON-41W / 22:00-21W / 06:00-41W
VMA10FA0-0002	41	5220	5220	6562					27	3682	3682	4629	VM ON-41W / 22:00-27W / 06:00-41W
VMA10FA0-0003	27	3682	4169	4629					14	1931	2187	2428	VM ON-27W / 22:00-14W / 06:00-27W
VMA10FA0-0004	27	3682	4169	4629					19	2554	2892	3211	VM ON-27W / 22:00-19W / 06:00-27W
VMA10FA0-0005	21	2833	3208	3561					11	1479	1675	1859	VM ON-21W / 22:00-11W / 06:00-21W
VMA10FA0-0006	21	2833	3208	3561					14	1931	1931	2428	VM ON-21W / 22:00-14W / 06:00-21W
VMA10FA0-0007	41	5220	5220	6562					21	2833	3208	3561	VM ON-41W / 00:00-21W / 06:00-41W
VMA10FA0-0008	41	5220	5220	6562					27	3682	4169	4629	VM ON-41W / 00:00-27W / 06:00-41W
VMA10FA0-0009	27	3682	4169	4629					14	1931	2187	2428	VM ON-27W / 00:00-14W / 06:00-27W
VMA10FA0-0010	27	3682	4169	4629					19	2554	2892	3211	VM ON-27W / 00:00-19W / 06:00-27W
VMA10FA0-0011	21	2833	2833	3561					11	1479	1675	1859	VM ON-21W / 00:00-11W / 06:00-21W
VMA10FA0-0012	21	2833	2833	3561					14	1931	2187	2428	VM ON-21W / 00:00-14W / 06:00-21W



Control options - Variant S - N(Optics 075 - 100 - 125 - 200 - AFN - ARS)

VM - VIRTUAL MIDNIGHT(Lumen package 4L - 2L)													
Setting Code	W Max	Nominal flux (lm)			W Med	Nominal flux (lm)			W Min	Nominal flux (lm)			Description
		2700K	3000K	4000K		2700K	3000K	4000K		2700K	3000K	4000K	
LUMEN PACKAGE 4L													
VMA10DA0-0013	28	3429	3883	4311	19	2419	2739	3041	14	1861	2107	2340	VM ON-28W / 21:00-19W / 24:00-14W / 04:00-19W/06:00-28W
VMA10DA0-0014	19	2419	2739	3041	13	1678	1900	2110	10	1269	1437	1595	VM ON-19W / 21:00-13W / 24:00-10W / 04:00-13W/06:00-19W
VMA10DA0-0015	14	1861	2107	2340	10	1269	1437	1595	8	972	1100	1221	VM ON-14 / 21:00-10W / 24:00-8W / 04:00-10W/06:00-14W
VMA10DA0-0001	28	3429	3883	4311					14	1861	2107	2340	VM ON-28W / 22:00-14W / 06:00-28W
VMA10DA0-0002	28	3429	3883	4311					19	2419	2739	3041	VM ON-28W / 22:00-19W / 06:00-28W
VMA10DA0-0003	19	2419	2739	3041					10	1269	1437	1595	VM ON-19W / 22:00-10W / 06:00-19W
VMA10DA0-0004	19	2419	2739	3041					13	1678	1900	2110	VM ON-19W / 22:00-13W / 06:00-19W
VMA10DA0-0005	14	1861	2107	2340					8	972	1100	1221	VM ON-14W / 22:00-8W / 06:00-14W
VMA10DA0-0006	14	1861	2107	2340					10	1269	1437	1595	VM ON-14W / 22:00-10W / 06:00-14W
VMA10DA0-0007	28	3429	3883	4311					14	1861	2107	2340	VM ON-28W / 00:00-14W / 06:00-28W
VMA10DA0-0008	28	3429	3883	4311					19	2419	2739	3041	VM ON-28W / 00:00-19W / 06:00-28W
VMA10DA0-0009	19	2419	2739	3041					10	1269	1437	1595	VM ON-19W / 00:00-10W / 06:00-19W
VMA10DA0-0010	19	2419	2739	3041					13	1678	1900	2110	VM ON-19W / 00:00-13W / 06:00-19W
VMA10DA0-0011	14	1861	2107	2340					8	972	1100	1221	VM ON-14W / 00:00-8W / 06:00-14W
VMA10DA0-0012	14	1861	2107	2340					10	1269	1437	1595	VM ON-14W / 00:00-10W / 06:00-14W
LUMEN PACKAGE 2L													
VMA10BA0-0013	15	1694	1918	2130	10	1195	1353	1502	8	919	1041	1156	VM ON-15W / 21:00-10W / 24:00-8W / 04:00-10W/06:00-15W
VMA10BA0-0014	10	1195	1353	1502	7	829	939	1042	5	627	710	788	VM ON-10W / 21:00-7W / 24:00-5W / 04:00-7W /06:00-10W
VMA10BA0-0015	8	919	1041	1156	5	627	710	788	4	480	543	603	VM ON-8W / 21:00-5W / 24:00-4W / 04:00-5W /06:00-8W
VMA10BA0-0001	15	1694	1918	2130					8	919	1041	1156	VM ON-15W / 22:00-8W / 06:00-15W
VMA10BA0-0002	15	1694	1918	2130					10	1195	1353	1502	VM ON-15W / 22:00-10W / 06:00-15W
VMA10BA0-0003	10	1195	1353	1502					5	627	710	788	VM ON-10W / 22:00-5W / 06:00-10W
VMA10BA0-0004	10	1195	1353	1502					7	829	939	1042	VM ON-10W / 22:00-7W / 06:00-10W
VMA10BA0-0005	8	919	1041	1156					4	480	543	603	VM ON-8W / 22:00-4W / 06:00-7W
VMA10BA0-0006	8	919	1041	1156					5	627	710	788	VM ON-8W / 22:00-5W / 06:00-7W
VMA10BA0-0007	15	1694	1918	2130					8	919	1041	1156	VM ON-15W / 00:00-8W / 06:00-15W
VMA10BA0-0008	15	1694	1918	2130					10	1195	1353	1502	VM ON-15W / 00:00-10W / 06:00-15W
VMA10BA0-0009	10	1195	1353	1502					5	627	710	788	VM ON-10W / 00:00-5W / 06:00-10W
VMA10BA0-0010	10	1195	1353	1502					7	829	939	1042	VM ON-10W / 00:00-7W / 06:00-10W
VMA10BA0-0011	8	919	1041	1156					4	480	543	603	VM ON-8W / 00:00-4W / 06:00-7W
VMA10BA0-0012	8	919	1041	1156					5	627	710	788	VM ON-8W / 00:00-5W / 06:00-7W

G - LINESWITCH									
Setting Code	System Watts W (High Mode)	Nominal flux (lm)			System Watts W (Low Mode)	Nominal flux (lm)			Description
		2700K	3000K	4000K		2700K	3000K	4000K	
LUMEN PACKAGE 8L									
LWE10HA0-0001	54	6872	7782	8640	27	3729	4223	4689	LINESWITCH (100%/50%) - 54W/27W
LWE10HA0-0002	36	4847	5489	6094	19	2543	2879	3197	LINESWITCH (100%/50%) - 36W/19W
LWE10HA0-0003	27	3729	4223	4689	15	1947	2205	2448	LINESWITCH (100%/50%) - 27W/15W
LUMEN PACKAGE 6L									
LWE10FA0-0001	41	5220	5911	6562	21	2833	3208	3561	LINESWITCH (100%/50%) - 41W/21W
LWE10FA0-0002	27	3682	4169	4629	14	1931	2187	2428	LINESWITCH (100%/50%) - 27W/14W
LWE10FA0-0003	21	2833	3208	3561	11	1479	1675	1859	LINESWITCH (100%/50%) - 21W/11W
LUMEN PACKAGE 4L									
LWE10DA0-0001	28	3429	3883	4311	14	1861	2107	2340	LINESWITCH (100%/50%) - 28W/14W
LWE10DA0-0002	19	2419	2739	3041	10	1269	1437	1595	LINESWITCH (100%/50%) - 19W/10W
LWE10DA0-0003	14	1861	2107	2340	8	972	1100	1221	LINESWITCH (100%/50%) - 14W/8W
LUMEN PACKAGE 2L									
LWLE10BA0-0001	15	1694	1918	2130	8	919	1041	1156	LINESWITCH (100%/50%) - 15W/8W
LWLE10BA0-0002	10	1195	1353	1502	5	627	710	788	LINESWITCH (100%/50%) - 10W/5W
LWLE10BA0-0003	8	919	1041	1156	4	480	543	603	LINESWITCH (100%/50%) - 8W/4W



Control options - Variant S - N(Optics 075 - 100 - 125 - 200 - AFN - ARS)

DL (DALI DIMMABLE)						
Lumen Package	Setting Code	System Watts W	Nominal flux (lm)			Description
			2700K	3000K	4000K	
8L	DLE10HA0-0001	54	6872	7782	8640	DALI MAX 54W
6L	DLE10FA0-0001	41	5220	5911	6562	DALI MAX 41W
4L	DLE10DA0-0001	28	3429	3883	4311	DALI MAX 28W
2L	DLE10BA0-0001	15	1694	1918	2130	DALI MAX 15W

FR - FLUX REGULATOR									
Setting Code	System Watts W (High Mode)	Nominal flux (lm)			System Watts W (Low Mode)	Nominal flux (lm)			Description
		2700K	3000K	4000K		2700K	3000K	4000K	
LUMEN PACKAGE 8L									
RFA10HA0-0001	54	6872	7782	8640	36	4847	5489	6094	REG. FLUSSO 54W@230V / 36W@170V
RFA10HA0-0002	54	6872	7782	8640	27	3729	4223	4689	REG. FLUSSO 54W@230V / 27W@170V
RFA10HA0-0003	36	4847	5489	6094	24	3363	3808	4228	REG. FLUSSO 36W@230V / 24W@170V
RFA10HA0-0004	36	4847	5489	6094	19	2543	2879	3197	REG. FLUSSO 36W@230V / 19W@170V
RFA10HA0-0005	27	3729	4223	4689	19	2543	2879	3197	REG. FLUSSO 27W@230V / 19W@170V
RFA10HA0-0006	27	3729	4223	4689	15	1947	2205	2448	REG. FLUSSO 27W@230V / 15W@170V
LUMEN PACKAGE 6L									
RFA10FA0-0001	41	5220	5911	6562	27	3682	4169	4629	REG. FLUSSO 41W@230V / 27W@170V
RFA10FA0-0002	41	5220	5911	6562	21	2833	3208	3561	REG. FLUSSO 41W@230V / 21W@170V
RFA10FA0-0003	27	3682	4169	4629	19	2554	2892	3211	REG. FLUSSO 27W@230V / 19W@170V
RFA10FA0-0004	27	3682	4169	4629	14	1931	2187	2428	REG. FLUSSO 27W@230V / 14W@170V
RFA10FA0-0005	21	2833	3208	3561	14	1931	2187	2428	REG. FLUSSO 21W@230V / 14W@170V
RFA10FA0-0006	21	2833	3208	3561	11	1479	1675	1859	REG. FLUSSO 21W@230V / 11W@170V
LUMEN PACKAGE 4L									
RFA10DA0-0001	28	3429	3883	4311	19	2419	2739	3041	REG. FLUSSO 28W@230V / 19W@170V
RFA10DA0-0002	28	3429	3883	4311	14	1861	2107	2340	REG. FLUSSO 28W@230V / 14W@170V
RFA10DA0-0003	19	2419	2739	3041	13	1678	1900	2110	REG. FLUSSO 19W@230V / 13W@170V
RFA10DA0-0004	19	2419	2739	3041	10	1269	1437	1595	REG. FLUSSO 19W@230V / 10W@170V
RFA10DA0-0005	14	1861	2107	2340	10	1269	1437	1595	REG. FLUSSO 14W@230V / 10W@170V
RFA10DA0-0006	14	1861	2107	2340	8	972	1100	1221	REG. FLUSSO 14W@230V / 8W@170V
LUMEN PACKAGE 2L									
RFA10BA0-0001	15	1694	1918	2130	10	1195	1353	1502	REG. FLUSSO 15W@230V / 10W@170V
RFA10BA0-0002	15	1694	1918	2130	8	919	1041	1156	REG. FLUSSO 15W@230V / 8W@170V
RFA10BA0-0003	10	1195	1353	1502	7	829	939	1042	REG. FLUSSO 10W@230V / 7W@170V
RFA10BA0-0004	10	1195	1353	1502	5	627	710	788	REG. FLUSSO 10W@230V / 5W@170V
RFA10BA0-0005	8	919	1041	1156	5	627	710	788	REG. FLUSSO 8W@230V / 5W@170V
RFA10BA0-0006	8	919	1041	1156	4	480	543	603	REG. FLUSSO 8W@230V / 4W@170V

CL*	
Setting Code	Description
CL###-****	CLO 50.000 HOURS START AT 90%
CL###-****	CLO 100.000 HOURS START AT 80%

*Standard CLO to be matched to programme powers for FX option for S-N variants, please for information contact Cree Lighting Europe.

VMC*	
Setting Code	Description
VMC###-****	CLO 50.000 HOURS START AT 90%
VMC###-****	CLO 100.000 HOURS START AT 80%

*Standard CLO to be matched to the wattage of the VM option programmes for S-N variants, please for information contact Cree Lighting Europe.



Control options - Variant Z (Optics 075 - 100 - 125 - 200 - AFN - ARS)

FX - FIXED OUTPUT					
Setting Code	System Watts W	Nominal flux (lm)			Description
		2700K	3000K	4000K	
LUMEN PACKAGE 8L					
FXP10HA0-0001	54	6872	7782	8640	FIXED OUTPUT 54W
FXP10HA0-0002	36	4847	5489	6094	FIXED OUTPUT 36W
FXP10HA0-0003	27	3729	4223	4689	FIXED OUTPUT 27W
LUMEN PACKAGE 6L					
FXP10FA0-0001	41	5220	5911	6562	FIXED OUTPUT 41W
FXP10FA0-0002	27	3682	4169	4629	FIXED OUTPUT 27W
FXP10FA0-0003	21	2833	3208	3561	FIXED OUTPUT 21W
LUMEN PACKAGE 4L					
FXP10DA0-0001	28	3429	3883	4311	FIXED OUTPUT 28W
FXP10DA0-0002	19	2419	2739	3041	FIXED OUTPUT 19W
FXP10DA0-0003	14	1861	2107	2340	FIXED OUTPUT 14W
LUMEN PACKAGE 2L					
FXP102B0-0001	15	1694	1918	2130	FIXED OUTPUT 15W
FXP102B0-0002	10	1195	1353	1502	FIXED OUTPUT 10W
FXP102B0-0003	8	919	1041	1156	FIXED OUTPUT 8W

VM - VIRTUAL MIDNIGHT (Lumen package 8L - 6L)													
Setting Code	W Max	Nominal flux (lm)			W Med	Nominal flux (lm)			W Min	Nominal flux (lm)			Description
		2700K	3000K	4000K		2700K	3000K	4000K		2700K	3000K	4000K	
LUMEN PACKAGE 8L													
VMP10HA0-0013	54	6872	7782	8640	36	4847	5178	6094	27	3729	4223	4689	VM ON-54W / 21:00-36W / 24:00-27W / 04:00-36W/06:00-54W
VMP10HA0-0014	36	4847	5489	6094	24	3363	3592	4228	19	2543	2879	3197	VM ON-36W / 21:00-24W / 24:00-19W /04:00-24W/06:00- 36W
VMP10HA0-0015	27	3729	4223	4689	19	2543	2716	3197	15	1947	2205	2448	VM ON-27W / 21:00-19W / 24:00-15W / 04:00-19W/06:00-27W
VMP10HA0-0001	54	6872	7782	8640					27	3729	4223	4689	VM ON-54W / 22:00-27W / 06:00-54W
VMP10HA0-0002	54	6872	7782	8640					36	4847	5489	6094	VM ON-54W / 22:00-36W / 06:00-54W
VMP10HA0-0003	36	4847	5489	6094					19	2543	2879	3197	VM ON-36W / 22:00-19W / 06:00-36W
VMP10HA0-0004	36	4847	5489	6094					24	3363	3808	4228	VM ON-36W / 22:00-24W / 06:00-36W
VMP10HA0-0005	27	3729	4223	4689					15	1947	2205	2448	VM ON-27W / 22:00-15W / 06:00-27W
VMP10HA0-0006	27	3729	4223	4689					19	2543	2879	3197	VM ON-27W / 22:00-19W / 06:00-27W
VMP10HA0-0007	54	6872	7782	8640					27	3729	4223	4689	VM ON-54W / 00:00-27W / 06:00-54W
VMP10HA0-0008	54	6872	7782	8640					36	4847	5489	6094	VM ON-54W / 00:00-36W / 06:00-54W
VMP10HA0-0009	36	4847	5489	6094					19	2543	2879	3197	VM ON-36W / 00:00-19W / 06:00-36W
VMP10HA0-0010	36	4847	5489	6094					24	3363	3808	4228	VM ON-36W / 00:00-24W / 06:00-36W
VMP10HA0-0011	27	3729	4223	4689					15	1947	2205	2448	VM ON-27W / 00:00-15W / 06:00-27W
VMP10HA0-0012	27	3729	4223	4689					19	2543	2879	3197	VM ON-27W / 00:00-19W / 06:00-27W
LUMEN PACKAGE 6L													
VMP10FA0-0013	41	5220	5911	6562					21	2833	3208	3561	VM ON-41W / 21:00-27W / 24:00-21W /04:00-27W/06:00- 41W
VMP10FA0-0014	27	3682	4169	4629	27	3682	4169	4629	14	1931	2187	2428	VM ON-27W / 21:00-19W / 24:00-14W /04:00-19W/06:00-27W
VMP10FA0-0015	21	2833	3208	3561	19	2554	2892	3211	11	1479	1675	1859	VM ON-21W / 21:00-14W / 24:00-11W /04:00-14W/06:00-21W
VMP10FA0-0001	41	5220	5220	6562	14	1931	2187	2428	21	2833	3208	3561	VM ON-41W / 22:00-21W / 06:00-41W
VMP10FA0-0002	41	5220	5220	6562					27	3682	3682	4629	VM ON-41W / 22:00-27W / 06:00-41W
VMP10FA0-0003	27	3682	4169	4629					14	1931	2187	2428	VM ON-27W / 22:00-14W / 06:00-27W
VMP10FA0-0004	27	3682	4169	4629					19	2554	2892	3211	VM ON-27W / 22:00-19W / 06:00-27W
VMP10FA0-0005	21	2833	3208	3561					11	1479	1675	1859	VM ON-21W / 22:00-11W / 06:00-21W
VMP10FA0-0006	21	2833	3208	3561					14	1931	1931	2428	VM ON-21W / 22:00-14W / 06:00-21W
VMP10FA0-0007	41	5220	5220	6562					21	2833	3208	3561	VM ON-41W / 00:00-21W / 06:00-41W
VMP10FA0-0008	41	5220	5220	6562					27	3682	4169	4629	VM ON-41W / 00:00-27W / 06:00-41W
VMP10FA0-0009	27	3682	4169	4629					14	1931	2187	2428	VM ON-27W / 00:00-14W / 06:00-27W
VMP10FA0-0010	27	3682	4169	4629					19	2554	2892	3211	VM ON-27W / 00:00-19W / 06:00-27W
VMP10FA0-0011	21	2833	2833	3561					11	1479	1675	1859	VM ON-21W / 00:00-11W / 06:00-21W
VMP10FA0-0012	21	2833	2833	3561					14	1931	2187	2428	VM ON-21W / 00:00-14W / 06:00-21W



Control options - Variant Z (Optics 075 - 100 - 125 - 200 - AFN - ARS)

VM - VIRTUAL MIDNIGHT (Lumen package 4L - 2L)													
Setting Code	W Max	Nominal flux (lm)			W Med	Nominal flux (lm)			W Min	Nominal flux (lm)			Description
		2700K	3000K	4000K		2700K	3000K	4000K		2700K	3000K	4000K	
LUMEN PACKAGE 4L													
VMP10DA0-0013	28	3429	3883	4311	19	2419	2739	3041	14	1861	2107	2340	VM ON-28W / 21:00-19W / 24:00-14W / 04:00-19W/06:00-28W
VMP10DA0-0014	19	2419	2739	3041	13	1678	1900	2110	10	1269	1437	1595	VM ON-19W / 21:00-13W / 24:00-10W / 04:00-13W/06:00-19W
VMP10DA0-0015	14	1861	2107	2340	10	1269	1437	1595	8	972	1100	1221	VM ON-14 / 21:00-10W / 24:00-8W / 04:00-10W/06:00-14W
VMP10DA0-0001	28	3429	3883	4311					14	1861	2107	2340	VM ON-28W / 22:00-14W / 06:00-28W
VMP10DA0-0002	28	3429	3883	4311					19	2419	2739	3041	VM ON-28W / 22:00-19W / 06:00-28W
VMP10DA0-0003	19	2419	2739	3041					10	1269	1437	1595	VM ON-19W / 22:00-10W / 06:00-19W
VMP10DA0-0004	19	2419	2739	3041					13	1678	1900	2110	VM ON-19W / 22:00-13W / 06:00-19W
VMP10DA0-0005	14	1861	2107	2340					8	972	1100	1221	VM ON-14W / 22:00-8W / 06:00-14W
VMP10DA0-0006	14	1861	2107	2340					10	1269	1437	1595	VM ON-14W / 22:00-10W / 06:00-14W
VMP10DA0-0007	28	3429	3883	4311					14	1861	2107	2340	VM ON-28W / 00:00-14W / 06:00-28W
VMP10DA0-0008	28	3429	3883	4311					19	2419	2739	3041	VM ON-28W / 00:00-19W / 06:00-28W
VMP10DA0-0009	19	2419	2739	3041					10	1269	1437	1595	VM ON-19W / 00:00-10W / 06:00-19W
VMP10DA0-0010	19	2419	2739	3041					13	1678	1900	2110	VM ON-19W / 00:00-13W / 06:00-19W
VMP10DA0-0011	14	1861	2107	2340					8	972	1100	1221	VM ON-14W / 00:00-8W / 06:00-14W
VMP10DA0-0012	14	1861	2107	2340					10	1269	1437	1595	VM ON-14W / 00:00-10W / 06:00-14W
LUMEN PACKAGE 2L													
VMP10BA0-0013	15	1694	1918	2130	10	1195	1353	1502	8	919	1041	1156	VM ON-15W / 21:00-10W / 24:00-8W / 04:00-10W/06:00-15W
VMP10BA0-0014	10	1195	1353	1502	7	829	939	1042	5	627	710	788	VM ON-10W / 21:00-7W / 24:00-5W / 04:00-7W /06:00-10W
VMP10BA0-0015	8	919	1041	1156	5	627	710	788	4	480	543	603	VM ON-8W / 21:00-5W / 24:00-4W / 04:00-5W /06:00-8W
VMP10BA0-0001	15	1694	1918	2130					8	919	1041	1156	VM ON-15W / 22:00-8W / 06:00-15W
VMP10BA0-0002	15	1694	1918	2130					10	1195	1353	1502	VM ON-15W / 22:00-10W / 06:00-15W
VMP10BA0-0003	10	1195	1353	1502					5	627	710	788	VM ON-10W / 22:00-5W / 06:00-10W
VMP10BA0-0004	10	1195	1353	1502					7	829	939	1042	VM ON-10W / 22:00-7W / 06:00-10W
VMP10BA0-0005	8	919	1041	1156					4	480	543	603	VM ON-8W / 22:00-4W / 06:00-7W
VMP10BA0-0006	8	919	1041	1156					5	627	710	788	VM ON-8W / 22:00-5W / 06:00-7W
VMP10BA0-0007	15	1694	1918	2130					8	919	1041	1156	VM ON-15W / 00:00-8W / 06:00-15W
VMP10BA0-0008	15	1694	1918	2130					10	1195	1353	1502	VM ON-15W / 00:00-10W / 06:00-15W
VMP10BA0-0009	10	1195	1353	1502					5	627	710	788	VM ON-10W / 00:00-5W / 06:00-10W
VMP10BA0-0010	10	1195	1353	1502					7	829	939	1042	VM ON-10W / 00:00-7W / 06:00-10W
VMP10BA0-0011	8	919	1041	1156					4	480	543	603	VM ON-8W / 00:00-4W / 06:00-7W
VMP10BA0-0012	8	919	1041	1156					5	627	710	788	VM ON-8W / 00:00-5W / 06:00-7W

CL*	
Setting Code	Description
CL###-****	CLO 50.000 HOURS START AT 90%
CL###-****	CLO 100.000 HOURS START AT 80%

*Standard CLO to be matched to programme powers for FX option for S-N variants, please for information contact Cree Lighting Europe.

VMC*	
Setting Code	Description
VMC###-****	CLO 50.000 HOURS START AT 90%
VMC###-****	CLO 100.000 HOURS START AT 80%

*Standard CLO to be matched to the wattage of the VM option programmes for S-N variants, please for information contact Cree Lighting Europe.



Control options - Variant Z (Optics 150 - SCP - PCL - PCR)

FX - FIXED OUTPUT					
Setting Code	System Watts W	Nominal flux (lm)			Description
		2700K	3000K	4000K	
LUMEN PACKAGE 8L					
FXA10HA0-00001	54	7186	7341	8640	FIXED OUTPUT 54W
FXA10HA0-00002	36	5068	5178	6094	FIXED OUTPUT 36W
FXA10HA0-00003	27	3899	3984	4689	FIXED OUTPUT 27W
LUMEN PACKAGE 6L					
FXA10FA0-00001	41	5458	5576	6562	FIXED OUTPUT 41W
FXA10FA0-00002	27	3850	3933	4629	FIXED OUTPUT 27W
FXA10FA0-00003	21	2962	3026	3561	FIXED OUTPUT 21W
LUMEN PACKAGE 4L					
FXA10DA0-00001	28	3585	3663	4311	FIXED OUTPUT 28W
FXA10DA0-00002	19	2529	2583	3041	FIXED OUTPUT 19W
FXA10DA0-00003	14	1946	1988	2340	FIXED OUTPUT 14W
LUMEN PACKAGE 2L					
FXA10BA0-00001	15	1771	1809	2130	FIXED OUTPUT 15W
FXA10BA0-00002	10	1249	1276	1502	FIXED OUTPUT 10W
FXA10BA0-00003	8	961	982	1156	FIXED OUTPUT 8W

VM - VIRTUAL MIDNIGHT (Lumen package 8L - 6L)													
Setting Code	W Max	Nominal flux (lm)			W Med	Nominal flux (lm)			W Min	Nominal flux (lm)			Description
		2700K	3000K	4000K		2700K	3000K	4000K		2700K	3000K	4000K	
LUMEN PACKAGE 8L													
VMA10HA0-0013	54	7186	7341	8640	36	5068	5178	6094	27	3899	3984	4689	VM ON-54W / 21:00-36W / 24:00-27W / 04:00-36W/06:00-54W
VMA10HA0-0014	36	5068	5178	6094	24	3516	3592	4228	19	2659	2716	3197	VM ON-36W / 21:00-24W / 24:00-19W /04:00-24W/06:00- 36W
VMA10HA0-0015	27	3899	3984	4689	19	2659	2716	3197	15	2036	2080	2448	VM ON-27W / 21:00-19W / 24:00-15W / 04:00-19W/06:00-27W
VMA10HA0-0001	54	7186	7341	8640					27	3899	3984	4689	VM ON-54W / 22:00-27W / 06:00-54W
VMA10HA0-0002	54	7186	7341	8640					36	5068	5178	6094	VM ON-54W / 22:00-36W / 06:00-54W
VMA10HA0-0003	36	5068	5178	6094					19	2659	2716	3197	VM ON-36W / 22:00-19W / 06:00-36W
VMA10HA0-0004	36	5068	5178	6094					24	3516	3592	4228	VM ON-36W / 22:00-24W / 06:00-36W
VMA10HA0-0005	27	3899	3984	4689					15	2036	2080	2448	VM ON-27W / 22:00-15W / 06:00-27W
VMA10HA0-0006	27	3899	3984	4689					19	2659	2716	3197	VM ON-27W / 22:00-19W / 06:00-27W
VMA10HA0-0007	54	7186	7341	8640					27	3899	3984	4689	VM ON-54W / 00:00-27W / 06:00-54W
VMA10HA0-0008	54	7186	7341	8640					36	5068	5178	6094	VM ON-54W / 00:00-36W / 06:00-54W
VMA10HA0-0009	36	5068	5178	6094					19	2659	2716	3197	VM ON-36W / 00:00-19W / 06:00-36W
VMA10HA0-0010	36	5068	5178	6094					24	3516	3592	4228	VM ON-36W / 00:00-24W / 06:00-36W
VMA10HA0-0011	27	3899	3984	4689					15	2036	2080	2448	VM ON-27W / 00:00-15W / 06:00-27W
VMA10HA0-0012	27	3899	3984	4689					19	2659	2716	3197	VM ON-27W / 00:00-19W / 06:00-27W
LUMEN PACKAGE 6L													
VMA10FA0-0013	41	5458	5576	6562					21	2962	3026	3561	VM ON-41W / 21:00-27W / 24:00-21W /04:00-27W/06:00- 41W
VMA10FA0-0014	27	3850	3933	4629	27	3850	3933	4629	14	2019	2063	2428	VM ON-27W / 21:00-19W / 24:00-14W /04:00-19W/06:00-27W
VMA10FA0-0015	21	2962	3026	3561	19	2671	2728	3211	11	1546	1580	1859	VM ON-21W / 21:00-14W / 24:00-11W /04:00-14W/06:00-21W
VMA10FA0-0001	41	5458	5576	6562	14	2019	2063	2428	21	2962	3026	3561	VM ON-41W / 22:00-21W / 06:00-41W
VMA10FA0-0002	41	5458	5576	6562					27	3850	3933	4629	VM ON-41W / 22:00-27W / 06:00-41W
VMA10FA0-0003	27	3850	3933	4629					14	2019	2063	2428	VM ON-27W / 22:00-14W / 06:00-27W
VMA10FA0-0004	27	3850	3933	4629					19	2671	2728	3211	VM ON-27W / 22:00-19W / 06:00-27W
VMA10FA0-0005	21	2962	3026	3561					11	1546	1580	1859	VM ON-21W / 22:00-11W / 06:00-21W
VMA10FA0-0006	21	2962	3026	3561					14	2019	2063	2428	VM ON-21W / 22:00-14W / 06:00-21W
VMA10FA0-0007	41	5458	5576	6562					21	2962	3026	3561	VM ON-41W / 00:00-21W / 06:00-41W
VMA10FA0-0008	41	5458	5576	6562					27	3850	3933	4629	VM ON-41W / 00:00-27W / 06:00-41W
VMA10FA0-0009	27	3850	3933	4629					14	2019	2063	2428	VM ON-27W / 00:00-14W / 06:00-27W
VMA10FA0-0010	27	3850	3933	4629					19	2671	2728	3211	VM ON-27W / 00:00-19W / 06:00-27W
VMA10FA0-0011	21	2962	3026	3561					11	1546	1580	1859	VM ON-21W / 00:00-11W / 06:00-21W
VMA10FA0-0012	21	2962	3026	3561					14	2019	2063	2428	VM ON-21W / 00:00-14W / 06:00-21W



Control options - Variant Z (Optics 150 - SCP - PCL - PCR)

VM - VIRTUAL MIDNIGHT (Lumen package 4L - 2L)													
Setting Code	W Max	Nominal flux (lm)			W Med	Nominal flux (lm)			W Min	Nominal flux (lm)			Description
		2700K	3000K	4000K		2700K	3000K	4000K		2700K	3000K	4000K	
LUMEN PACKAGE 4L													
VMA10DA0-0013	28	3585	3663	4311	19	2529	2583	3041	14	1946	1988	2340	VM ON-28W / 21:00-19W / 24:00-14W / 04:00-19W/06:00-28W
VMA10DA0-0014	19	2529	2583	3041	13	1754	1792	2110	10	1327	1355	1595	VM ON-19W / 21:00-13W / 24:00-10W / 04:00-13W/06:00-19W
VMA10DA0-0015	14	1946	1988	2340	10	1327	1355	1595	8	1016	1038	1221	VM ON-14 / 21:00-10W / 24:00-8W / 04:00-10W/06:00-14W
VMA10DA0-0001	28	3585	3663	4311					14	1946	1988	2340	VM ON-28W / 22:00-14W / 06:00-28W
VMA10DA0-0002	28	3585	3663	4311					19	2529	2583	3041	VM ON-28W / 22:00-19W / 06:00-28W
VMA10DA0-0003	19	2529	2583	3041					10	1327	1355	1595	VM ON-19W / 22:00-10W / 06:00-19W
VMA10DA0-0004	19	2529	2583	3041					13	1754	1792	2110	VM ON-19W / 22:00-13W / 06:00-19W
VMA10DA0-0005	14	1946	1988	2340					8	1016	1038	1221	VM ON-14W / 22:00-8W / 06:00-14W
VMA10DA0-0006	14	1946	1988	2340					10	1327	1355	1595	VM ON-14W / 22:00-10W / 06:00-14W
VMA10DA0-0007	28	3585	3663	4311					14	1946	1988	2340	VM ON-28W / 00:00-14W / 06:00-28W
VMA10DA0-0008	28	3585	3663	4311					19	2529	2583	3041	VM ON-28W / 00:00-19W / 06:00-28W
VMA10DA0-0009	19	2529	2583	3041					10	1327	1355	1595	VM ON-19W / 00:00-10W / 06:00-19W
VMA10DA0-0010	19	2529	2583	3041					13	1754	1792	2110	VM ON-19W / 00:00-13W / 06:00-19W
VMA10DA0-0011	14	1946	1988	2340					8	1016	1038	1221	VM ON-14W / 00:00-8W / 06:00-14W
VMA10DA0-0012	14	1946	1988	2340					10	1327	1355	1595	VM ON-14W / 00:00-10W / 06:00-14W
LUMEN PACKAGE 2L													
VMA10BA0-0013	15	1771	1809	2130	10	1249	1276	1502	8	961	982	1156	VM ON-15W / 21:00-10W / 24:00-8W / 04:00-10W/06:00-15W
VMA10BA0-0014	10	1249	1276	1502	7	867	885	1042	5	655	669	788	VM ON-10W / 21:00-7W / 24:00-5W / 04:00-7W /06:00-10W
VMA10BA0-0015	8	961	982	1156	5	655	669	788	4	502	513	603	VM ON-8W / 21:00-5W / 24:00-4W / 04:00-5W /06:00-8W
VMA10BA0-0001	15	1771	1809	2130					8	961	982	1156	VM ON-15W / 22:00-8W / 06:00-15W
VMA10BA0-0002	15	1771	1809	2130					10	1249	1276	1502	VM ON-15W / 22:00-10W / 06:00-15W
VMA10BA0-0003	10	1249	1276	1502					5	655	669	788	VM ON-10W / 22:00-5W / 06:00-10W
VMA10BA0-0004	10	1249	1276	1502					7	867	885	1042	VM ON-10W / 22:00-7W / 06:00-10W
VMA10BA0-0005	8	961	982	1156					4	502	513	603	VM ON-8W / 22:00-4W / 06:00-7W
VMA10BA0-0006	8	961	982	1156					5	655	669	788	VM ON-8W / 22:00-5W / 06:00-7W
VMA10BA0-0007	15	1771	1809	2130					8	961	982	1156	VM ON-15W / 00:00-8W / 06:00-15W
VMA10BA0-0008	15	1771	1809	2130					10	1249	1276	1502	VM ON-15W / 00:00-10W / 06:00-15W
VMA10BA0-0009	10	1249	1276	1502					5	655	669	788	VM ON-10W / 00:00-5W / 06:00-10W
VMA10BA0-0010	10	1249	1276	1502					7	867	885	1042	VM ON-10W / 00:00-7W / 06:00-10W
VMA10BA0-0011	8	961	982	1156					4	502	513	603	VM ON-8W / 00:00-4W / 06:00-7W
VMA10BA0-0012	8	961	982	1156					5	655	669	788	VM ON-8W / 00:00-5W / 06:00-7W

G - LINESWITCH									
Setting Code	System Watts W (High Mode)	Nominal flux (lm)			System Watts W (Low Mode)	Nominal flux (lm)			Description
		2700K	3000K	4000K		2700K	3000K	4000K	
LUMEN PACKAGE 8L									
LWE10HA0-0001	54	8640	7341	7186	27	3899	3984	4689	LINESWITCH (100%/50%) - 54W/27W
LWE10HA0-0002	36	6094	5178	5068	19	2659	2716	3197	LINESWITCH (100%/50%) - 36W/19W
LWE10HA0-0003	27	4689	3984	3899	15	2036	2080	2448	LINESWITCH (100%/50%) - 27W/15W
LUMEN PACKAGE 6L									
LWE10FA0-0001	41	6562	5576	5458	21	2962	3026	3561	LINESWITCH (100%/50%) - 41W/21W
LWE10FA0-0002	27	4629	3933	3850	14	2019	2063	2428	LINESWITCH (100%/50%) - 27W/14W
LWE10FA0-0003	21	3561	3026	2962	11	1546	1580	1859	LINESWITCH (100%/50%) - 21W/11W
LUMEN PACKAGE 4L									
LWE10DA0-0001	28	4311	3663	3585	14	1946	1988	2340	LINESWITCH (100%/50%) - 28W/14W
LWE10DA0-0002	19	3041	2583	2529	10	1327	1355	1595	LINESWITCH (100%/50%) - 19W/10W
LWE10DA0-0003	14	2340	1988	1946	8	1016	1038	1221	LINESWITCH (100%/50%) - 14W/8W
LUMEN PACKAGE 2L									
LWLE10BA0-0001	15	2130	1809	1771	8	961	982	1156	LINESWITCH (100%/50%) - 15W/8W
LWLE10BA0-0002	10	1502	1276	1249	5	655	669	788	LINESWITCH (100%/50%) - 10W/5W
LWLE10BA0-0003	8	1156	982	961	4	502	513	603	LINESWITCH (100%/50%) - 8W/4W



Control options - Variant Z (Optics 150 - SCP - PCL - PCR)

DL - DALI DIMMABLE						
Lumen Package	System Watts W	Nominal flux (lm)	Description			Descrizione
			2700K	3000K	4000K	
8L	DLE10HA0-0001	54	7186	7341	8640	DALI MAX 54W
6L	DLE10FA0-0001	41	5458	5576	6562	DALI MAX 41W
4L	DLE10DA0-0001	28	3585	3663	4311	DALI MAX 28W
2L	DLE10BA0-0001	15	1771	1809	2130	DALI MAX 15W

FR - FLUX REGULATOR									
Setting Code	System Watts W (High Mode)	Nominal flux (lm)			System Watts W (Low Mode)	Nominal flux (lm)			Description
		2700K	3000K	4000K		2700K	3000K	4000K	
LUMEN PACKAGE 8L									
RFA10HA0-0001	54	7186	7341	8640	36	5068	5178	6094	REG. FLUSSO 54W@230V / 36W@170V
RFA10HA0-0002	54	7186	7341	8640	27	3899	3984	4689	REG. FLUSSO 54W@230V / 27W@170V
RFA10HA0-0003	36	5068	5178	6094	24	3516	3592	4228	REG. FLUSSO 36W@230V / 24W@170V
RFA10HA0-0004	36	5068	5178	6094	19	2659	2716	3197	REG. FLUSSO 36W@230V / 19W@170V
RFA10HA0-0005	27	3899	3984	4689	19	2659	2716	3197	REG. FLUSSO 27W@230V / 19W@170V
RFA10HA0-0006	27	3899	3984	4689	15	2036	2080	2448	REG. FLUSSO 27W@230V / 15W@170V
LUMEN PACKAGE 6L									
RFA10FA0-0001	41	5458	5576	6562	27	3850	3933	4629	REG. FLUSSO 41W@230V / 27W@170V
RFA10FA0-0002	41	5458	5576	6562	21	2962	3026	3561	REG. FLUSSO 41W@230V / 21W@170V
RFA10FA0-0003	27	3850	3933	4629	19	2671	2728	3211	REG. FLUSSO 27W@230V / 19W@170V
RFA10FA0-0004	27	3850	3933	4629	14	2019	2063	2428	REG. FLUSSO 27W@230V / 14W@170V
RFA10FA0-0005	21	2962	3026	3561	14	2019	2063	2428	REG. FLUSSO 21W@230V / 14W@170V
RFA10FA0-0006	21	2962	3026	3561	11	1546	1580	1859	REG. FLUSSO 21W@230V / 11W@170V
LUMEN PACKAGE 4L									
RFA10DA0-0001	28	3585	3663	4311	19	2529	2583	3041	REG. FLUSSO 28W@230V / 19W@170V
RFA10DA0-0002	28	3585	3663	4311	14	1946	1988	2340	REG. FLUSSO 28W@230V / 14W@170V
RFA10DA0-0003	19	2529	2583	3041	13	1754	1792	2110	REG. FLUSSO 19W@230V / 13W@170V
RFA10DA0-0004	19	2529	2583	3041	10	1327	1355	1595	REG. FLUSSO 19W@230V / 10W@170V
RFA10DA0-0005	14	1946	1988	2340	10	1327	1355	1595	REG. FLUSSO 14W@230V / 10W@170V
RFA10DA0-0006	14	1946	1988	2340	8	1016	1038	1221	REG. FLUSSO 14W@230V / 8W@170V
LUMEN PACKAGE 2L									
RFA10BA0-0001	15	1771	1809	2130	10	1249	1276	1502	REG. FLUSSO 15W@230V / 10W@170V
RFA10BA0-0002	15	1771	1809	2130	8	961	982	1156	REG. FLUSSO 15W@230V / 8W@170V
RFA10BA0-0003	10	1249	1276	1502	7	867	885	1042	REG. FLUSSO 10W@230V / 7W@170V
RFA10BA0-0004	10	1249	1276	1502	5	655	669	788	REG. FLUSSO 10W@230V / 5W@170V
RFA10BA0-0005	8	961	982	1156	5	655	669	788	REG. FLUSSO 8W@230V / 5W@170V
RFA10BA0-0006	8	961	982	1156	4	502	513	603	REG. FLUSSO 8W@230V / 4W@170V

CL*	
Setting Code	Description
CL###-****	CLO 50.000 HOURS START AT 90%
CL###-****	CLO 100.000 HOURS START AT 80%

*Standard CLO to be matched to programme powers for FX option for S-N variants, please for information contact Cree Lighting Europe.

VMC*	
Setting Code	Description
VMC###-****	CLO 50.000 HOURS START AT 90%
VMC###-****	CLO 100.000 HOURS START AT 80%

*Standard CLO to be matched to the wattage of the VM option programmes for S-N variants, please for information contact Cree Lighting Europe.



Control options - Variant Z (Optics 150 - SCP - PCL - PCR)

FX - FIXED OUTPUT					
Setting Code	Potenza di sistema W	Nominal flux (lm)			Description
		2700K	3000K	4000K	
LUMEN PACKAGE 8L					
FXP10HA0-0001	54	7186	7341	8640	FIXED OUTPUT 54W
FXP10HA0-0002	36	5068	5178	6094	FIXED OUTPUT 36W
FXP10HA0-0003	27	3899	3984	4689	FIXED OUTPUT 27W
LUMEN PACKAGE 6L					
FXP10FA0-0001	41	5458	5576	6562	FIXED OUTPUT 41W
FXP10FA0-0002	27	3850	3933	4629	FIXED OUTPUT 27W
FXP10FA0-0003	21	2962	3026	3561	FIXED OUTPUT 21W
LUMEN PACKAGE 4L					
FXP10DA0-0001	28	3585	3663	4311	FIXED OUTPUT 28W
FXP10DA0-0002	19	2529	2583	3041	FIXED OUTPUT 19W
FXP10DA0-0003	14	1946	1988	2340	FIXED OUTPUT 14W
LUMEN PACKAGE 2L					
FXP102B0-0001	15	1771	1809	2130	FIXED OUTPUT 15W
FXP102B0-0002	10	1249	1276	1502	FIXED OUTPUT 10W
FXP102B0-0003	8	961	982	1156	FIXED OUTPUT 8W

VM - VIRTUAL MIDNIGHT (Lumen package 8L - 6L)													
Setting Code	W Max	Nominal flux (lm)			W Med	Nominal flux (lm)			W Min	Nominal flux (lm)			Description
		2700K	3000K	4000K		2700K	3000K	4000K		2700K	3000K	4000K	
LUMEN PACKAGE 8L													
VMP10HA0-0013	54	7186	7341	8640	36	5068	5178	6094	27	3899	3984	4689	VM ON-54W / 21:00-36W / 24:00-27W / 04:00-36W/06:00-54W
VMP10HA0-0014	36	5068	5178	6094	24	3516	3592	4228	19	2659	2716	3197	VM ON-36W / 21:00-24W / 24:00-19W /04:00-24W/06:00- 36W
VMP10HA0-0015	27	3899	3984	4689	19	2659	2716	3197	15	2036	2080	2448	VM ON-27W / 21:00-19W / 24:00-15W / 04:00-19W/06:00-27W
VMP10HA0-0001	54	7186	7341	8640					27	3899	3984	4689	VM ON-54W / 22:00-27W / 06:00-54W
VMP10HA0-0002	54	7186	7341	8640					36	5068	5178	6094	VM ON-54W / 22:00-36W / 06:00-54W
VMP10HA0-0003	36	5068	5178	6094					19	2659	2716	3197	VM ON-36W / 22:00-19W / 06:00-36W
VMP10HA0-0004	36	5068	5178	6094					24	3516	3592	4228	VM ON-36W / 22:00-24W / 06:00-36W
VMP10HA0-0005	27	3899	3984	4689					15	2036	2080	2448	VM ON-27W / 22:00-15W / 06:00-27W
VMP10HA0-0006	27	3899	3984	4689					19	2659	2716	3197	VM ON-27W / 22:00-19W / 06:00-27W
VMP10HA0-0007	54	7186	7341	8640					27	3899	3984	4689	VM ON-54W / 00:00-27W / 06:00-54W
VMP10HA0-0008	54	7186	7341	8640					36	5068	5178	6094	VM ON-54W / 00:00-36W / 06:00-54W
VMP10HA0-0009	36	5068	5178	6094					19	2659	2716	3197	VM ON-36W / 00:00-19W / 06:00-36W
VMP10HA0-0010	36	5068	5178	6094					24	3516	3592	4228	VM ON-36W / 00:00-24W / 06:00-36W
VMP10HA0-0011	27	3899	3984	4689					15	2036	2080	2448	VM ON-27W / 00:00-15W / 06:00-27W
VMP10HA0-0012	27	3899	3984	4689					19	2659	2716	3197	VM ON-27W / 00:00-19W / 06:00-27W
LUMEN PACKAGE 6L													
VMP10FA0-0013	41	5458	5576	6562					21	2962	3026	3561	VM ON-41W / 21:00-27W / 24:00-21W /04:00-27W/06:00- 41W
VMP10FA0-0014	27	3850	3933	4629	27	3850	3933	4629	14	2019	2063	2428	VM ON-27W / 21:00-19W / 24:00-14W /04:00-19W/06:00-27W
VMP10FA0-0015	21	2962	3026	3561	19	2671	2728	3211	11	1546	1580	1859	VM ON-21W / 21:00-14W / 24:00-11W /04:00-14W/06:00-21W
VMP10FA0-0001	41	5458	5576	6562	14	2019	2063	2428	21	2962	3026	3561	VM ON-41W / 22:00-21W / 06:00-41W
VMP10FA0-0002	41	5458	5576	6562					27	3850	3933	4629	VM ON-41W / 22:00-27W / 06:00-41W
VMP10FA0-0003	27	3850	3933	4629					14	2019	2063	2428	VM ON-27W / 22:00-14W / 06:00-27W
VMP10FA0-0004	27	3850	3933	4629					19	2671	2728	3211	VM ON-27W / 22:00-19W / 06:00-27W
VMP10FA0-0005	21	2962	3026	3561					11	1546	1580	1859	VM ON-21W / 22:00-11W / 06:00-21W
VMP10FA0-0006	21	2962	3026	3561					14	2019	2063	2428	VM ON-21W / 22:00-14W / 06:00-21W
VMP10FA0-0007	41	5458	5576	6562					21	2962	3026	3561	VM ON-41W / 00:00-21W / 06:00-41W
VMP10FA0-0008	41	5458	5576	6562					27	3850	3933	4629	VM ON-41W / 00:00-27W / 06:00-41W
VMP10FA0-0009	27	3850	3933	4629					14	2019	2063	2428	VM ON-27W / 00:00-14W / 06:00-27W
VMP10FA0-0010	27	3850	3933	4629					19	2671	2728	3211	VM ON-27W / 00:00-19W / 06:00-27W
VMP10FA0-0011	21	2962	3026	3561					11	1546	1580	1859	VM ON-21W / 00:00-11W / 06:00-21W
VMP10FA0-0012	21	2962	3026	3561					14	2019	2063	2428	VM ON-21W / 00:00-14W / 06:00-21W




Control options - Variant Z (Optics 150 - SCP - PCL - PCR)

VM - VIRTUAL MIDNIGHT (Lumen package 4L - 2L)													
Setting Code	W Max	Nominal flux (lm)			W Med	Nominal flux (lm)			W Min	Nominal flux (lm)			Description
		2700K	3000K	4000K		2700K	3000K	4000K		2700K	3000K	4000K	
LUMEN PACKAGE 4L													
VMP10DA0-0013	28	3585	3663	4311	19	2529	2583	3041	14	1946	1988	2340	VM ON-28W / 21:00-19W / 24:00-14W / 04:00-19W/06:00-28W
VMP10DA0-0014	19	2529	2583	3041	13	1754	1792	2110	10	1327	1355	1595	VM ON-19W / 21:00-13W / 24:00-10W / 04:00-13W/06:00-19W
VMP10DA0-0015	14	1946	1988	2340	10	1327	1355	1595	8	1016	1038	1221	VM ON-14 / 21:00-10W / 24:00-8W / 04:00-10W/06:00-14W
VMP10DA0-0001	28	3585	3663	4311					14	1946	1988	2340	VM ON-28W / 22:00-14W / 06:00-28W
VMP10DA0-0002	28	3585	3663	4311					19	2529	2583	3041	VM ON-28W / 22:00-19W / 06:00-28W
VMP10DA0-0003	19	2529	2583	3041					10	1327	1355	1595	VM ON-19W / 22:00-10W / 06:00-19W
VMP10DA0-0004	19	2529	2583	3041					13	1754	1792	2110	VM ON-19W / 22:00-13W / 06:00-19W
VMP10DA0-0005	14	1946	1988	2340					8	1016	1038	1221	VM ON-14W / 22:00-8W / 06:00-14W
VMP10DA0-0006	14	1946	1988	2340					10	1327	1355	1595	VM ON-14W / 22:00-10W / 06:00-14W
VMP10DA0-0007	28	3585	3663	4311					14	1946	1988	2340	VM ON-28W / 00:00-14W / 06:00-28W
VMP10DA0-0008	28	3585	3663	4311					19	2529	2583	3041	VM ON-28W / 00:00-19W / 06:00-28W
VMP10DA0-0009	19	2529	2583	3041					10	1327	1355	1595	VM ON-19W / 00:00-10W / 06:00-19W
VMP10DA0-0010	19	2529	2583	3041					13	1754	1792	2110	VM ON-19W / 00:00-13W / 06:00-19W
VMP10DA0-0011	14	1946	1988	2340					8	1016	1038	1221	VM ON-14W / 00:00-8W / 06:00-14W
VMP10DA0-0012	14	1946	1988	2340					10	1327	1355	1595	VM ON-14W / 00:00-10W / 06:00-14W
LUMEN PACKAGE 2L													
VMP10BA0-0013	15	1771	1809	2130	10	1249	1276	1502	8	961	982	1156	VM ON-15W / 21:00-10W / 24:00-8W / 04:00-10W/06:00-15W
VMP10BA0-0014	10	1249	1276	1502	7	867	885	1042	5	655	669	788	VM ON-10W / 21:00-7W / 24:00-5W / 04:00-7W /06:00-10W
VMP10BA0-0015	8	961	982	1156	5	655	669	788	4	502	513	603	VM ON-8W / 21:00-5W / 24:00-4W / 04:00-5W /06:00-8W
VMP10BA0-0001	15	1771	1809	2130					8	961	982	1156	VM ON-15W / 22:00-8W / 06:00-15W
VMP10BA0-0002	15	1771	1809	2130					10	1249	1276	1502	VM ON-15W / 22:00-10W / 06:00-15W
VMP10BA0-0003	10	1249	1276	1502					5	655	669	788	VM ON-10W / 22:00-5W / 06:00-10W
VMP10BA0-0004	10	1249	1276	1502					7	867	885	1042	VM ON-10W / 22:00-7W / 06:00-10W
VMP10BA0-0005	8	961	982	1156					4	502	513	603	VM ON-8W / 22:00-4W / 06:00-7W
VMP10BA0-0006	8	961	982	1156					5	655	669	788	VM ON-8W / 22:00-5W / 06:00-7W
VMP10BA0-0007	15	1771	1809	2130					8	961	982	1156	VM ON-15W / 00:00-8W / 06:00-15W
VMP10BA0-0008	15	1771	1809	2130					10	1249	1276	1502	VM ON-15W / 00:00-10W / 06:00-15W
VMP10BA0-0009	10	1249	1276	1502					5	655	669	788	VM ON-10W / 00:00-5W / 06:00-10W
VMP10BA0-0010	10	1249	1276	1502					7	867	885	1042	VM ON-10W / 00:00-7W / 06:00-10W
VMP10BA0-0011	8	961	982	1156					4	502	513	603	VM ON-8W / 00:00-4W / 06:00-7W
VMP10BA0-0012	8	961	982	1156					5	655	669	788	VM ON-8W / 00:00-5W / 06:00-7W

Photometry


All published luminaire photometric testing performed by an external certified ISO 17025 laboratory.
To obtain an IES file specific to your project consult: www.creelighting-europe.com

075 - Type II Short

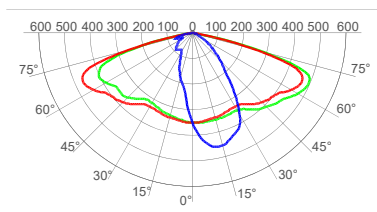

cd/klm
C0 - C180 C90 - C270 C2.5 - C182.5

Test Report #: 1088-QL20-R18




lux
TRSA-2-075-8L-407
Mounting Height: 6m

LUMEN OUTPUT - 075 (Type II Short)

Lumen Package	2700K	3000K	4000K
	Initial Delivered Lumens*	Initial Delivered Lumens*	Initial Delivered Lumens*
2L	1450	1650	1850
4L	2950	3400	3750
6L	4550	5150	5700
8L	5950	6800	7516


* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -4 and +10% of initial delivered lumens

100 - Type II Short

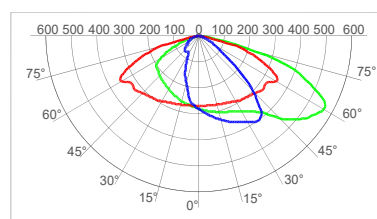

cd/klm
C0 - C180 C90 - C270 C20 - C200

Test Report #: 1088-QL20-R12




lux
TRSA-2-100-8L-407
Mounting Height: 6m

LUMEN OUTPUT - 100 (Type II Short)

Lumen Package	2700K	3000K	4000K
	Initial Delivered Lumens*	Initial Delivered Lumens*	Initial Delivered Lumens*
2L	1400	1600	1800
4L	2900	3300	3650
6L	4400	5000	5550
8L	5820	6590	7317


* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -4 and +10% of initial delivered lumens

125 - Type II Short

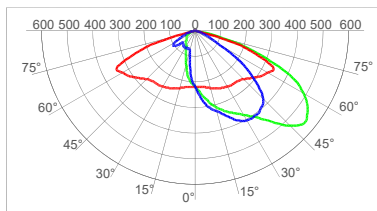

cd/klm
C0 - C180 C90 - C270 C35 - C215

Test Report #: 1088-QL20-R19




lux
TRSA-2-125-8L-407
Mounting Height: 6m

LUMEN OUTPUT - 125 (Type II Short)

Lumen Package	2700K	3000K	4000K
	Initial Delivered Lumens*	Initial Delivered Lumens*	Initial Delivered Lumens*
2L	1450	1650	1850
4L	2950	3400	3750
6L	4550	5150	5700
8L	5950	6800	7475


* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -4 and +10% of initial delivered lumens

150 - Type III Short

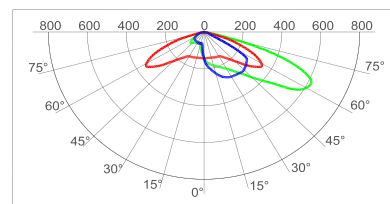

cd/klm
C0 - C180 C90 - C270 C27.5 - C207.5

Test Report #: 1088-QL21-S03



lux
TRSA-2-150-8L-407
Mounting Height: 6m

LUMEN OUTPUT - 150 (Type III Short)


Lumen Package	2700K	3000K	4000K
	Initial Delivered Lumens*	Initial Delivered Lumens*	Initial Delivered Lumens*
2L	1590	1625	1912
4L	3219	3289	3871
6L	4901	5006	5893
8L	6452	6591	7758

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -4 and +10% of initial delivered lumens

Photometry


All published luminaire photometric testing performed by an external certified ISO 17025 laboratory.
To obtain an IES file specific to your project consult: www.creelighting-europe.com

200 - Type II Short

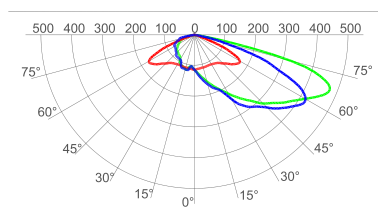

cd/klm
C0 - C180 C90 - C270 C55 - C235

Test Report #: 1088-QL20-S05




lux
TRSA-2-200-8L-407
Mounting Height: 6m

LUMEN OUTPUT - 200 (Type II Short)

Lumen Package	2700K	3000K	4000K
	Initial Delivered Lumens*	Initial Delivered Lumens*	Initial Delivered Lumens*
2L	1439	1629	1809
4L	2913	3299	3662
6L	4435	5021	5575
8L	5838	6611	7340


* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -4 and +10% of initial delivered lumens

SCP - Type II Short

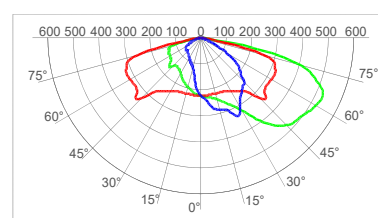

cd/klm
C0 - C180 C90 - C270 C20 - C200

Test Report #: 1088-QL20-R15




lux
TRSA-2-SCP-8L-407
Mounting Height: 6m

LUMEN OUTPUT - SCP (Type II Short)

Lumen Package	2700K	3000K	4000K
	Initial Delivered Lumens*	Initial Delivered Lumens*	Initial Delivered Lumens*
2L	1400	1600	1800
4L	2900	3300	3650
6L	4400	5000	5550
8L	5820	6590	7317


* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -4 and +10% of initial delivered lumens

AFN - Area Flood Narrow

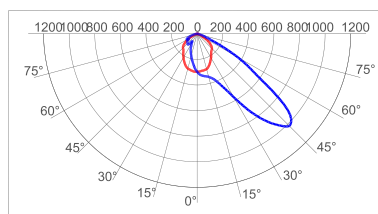

cd/klm
C0 - C180 C90 - C270

Test Report #: 1088-QL21-S04




lux
TRSA-2-AFN-8L-407
Mounting Height: 6m

LUMEN OUTPUT - AFN (Area Flood Narrow)

Lumen Package	2700K	3000K	4000K
	Initial Delivered Lumens*	Initial Delivered Lumens*	Initial Delivered Lumens*
2L	1463	1656	1839
4L	2961	3353	3723
6L	4508	5104	5667
8L	5935	6720	7461


* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -4 and +10% of initial delivered lumens

ARS - Roto-Symmetric Area

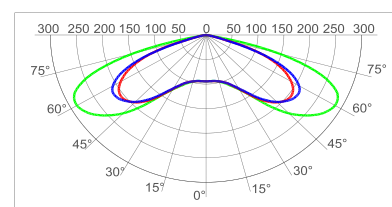

cd/klm
C0 - C180 C90 - C270 C135 - C315

Test Report #: 1088-QL21-S05



lux
TRSA-2-ARS-8L-407
Mounting Height: 6m

LUMEN OUTPUT - ARS (Roto-Symmetric Area)


Lumen Package	2700K	3000K	4000K
	Initial Delivered Lumens*	Initial Delivered Lumens*	Initial Delivered Lumens*
2L	1475	1670	1854
4L	2986	3381	3754
6L	4546	5147	5715
8L	5985	6777	7524

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -4 and +10% of initial delivered lumens

Photometry


All published luminaire photometric testing performed by an external certified ISO 17025 laboratory.
To obtain an IES file specific to your project consult: www.creelighting-europe.com

PCR - Pedestrian Crossing Right

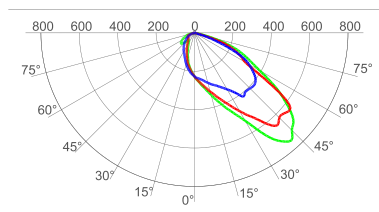

cd/klm
C0 - C180 C90 - C270 C17.5 - C197.5

Test Report #: 1088-QL21-S03




lux
TRSA-2-PCR-8L-407
Mounting Height: 6m

LUMEN OUTPUT - PCR (Pedestrian Crossing Right)

Lumen Package	2700K	3000K	4000K
	Initial Delivered Lumens*	Initial Delivered Lumens*	Initial Delivered Lumens*
2L	1622	1657	1951
4L	3285	3355	3949
6L	5000	5108	6012
8L	6583	6725	7915


* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -4 and +10% of initial delivered lumens

PCL - Pedestrian Crossing Left

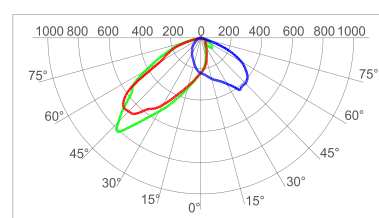

cd/klm
C0 - C180 C90 - C270 C160 - C340

Test Report #: 1088-QL21-S04



lux
TRSA-2-PCL-8L-407
Mounting Height: 6m

LUMEN OUTPUT - PCL (Pedestrian Crossing Left)

Lumen Package	2700K	3000K	4000K
	Initial Delivered Lumens*	Initial Delivered Lumens*	Initial Delivered Lumens*
2L	1633	1668	1963
4L	3305	3377	3974
6L	5031	5140	6050
8L	6624	6767	7965

* Initial delivered lumens at 25°C (77°F). Actual production yield may vary between -4 and +10% of initial delivered lumens