

DENALI

Surface fittings for commercial outdoor areas



DENALI WITH THE STANDARD CIRCULAR BEZEL



DENALI WITH THE EYELID BEZEL



SCAN FOR DIGITAL COPY

APPLICATIONS

- Exterior walkways and stairs
- Building perimeters

CONSTRUCTION

- Die-cast aluminium base and bezel, with light-textured UV stable dark grey paint finish to RAL7010
- Polycarbonate opal diffuser
- Piano-key terminal block with capacity for 2 x 1.5mm² cable for loop-in/loop-out
- Twin cable entry points with grommets.

TECHNICAL DETAILS


- LEDs on metal core PCB
- **Circular bezel**
17W, 1,450 lm, 85 l.lm/c.W
- **Eyelid bezel**
17W, 1,181 lm, 69.1 l.lm/c.W
- CRI >80
- CCT 4000K
- ENEC approved, flicker free, LED driver
- Emergency maintained 3 hours versions (suffix M3) available, as listed

OPTIONS

DIMMING Dim-to-10% (corridor function) available on all variants. Add suffix CF.

SENSOR Available with micro-wave occupancy sensor fitted on all versions except M3. Add suffix MW.

DIMMING & SENSOR A popular combination is corridor function & micro-wave sensor. Suffix CFMW. Not available on M3 versions.

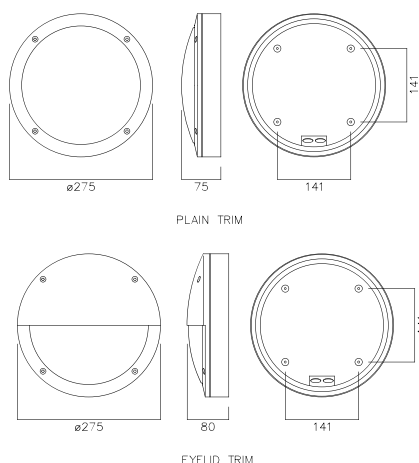

ORDER CODE	DESCRIPTION
NDE15/840	Denali 15W LED IP65 Ali Bulkhead 840
NDE15/M3/840	Denali 15W LED IP65 Ali Bulkhead M3 840
NDE15/MW/840	Denali 15W LED IP65 Ali Bulkhead MW 840
NDE15/ELID/840	Denali 15W LED IP65 Eyelid Ali Bulkhead 840
NDE15/ELID/M3/840	Denali 15W LED IP65 Eyelid Ali Bulkhead M3 840
NDE15/ELID/MW/840	Denali 15W LED IP65 Eyelid Ali Bulkhead MW 840