



Armstrong[®]
FLOORING

WOODLIN[™]



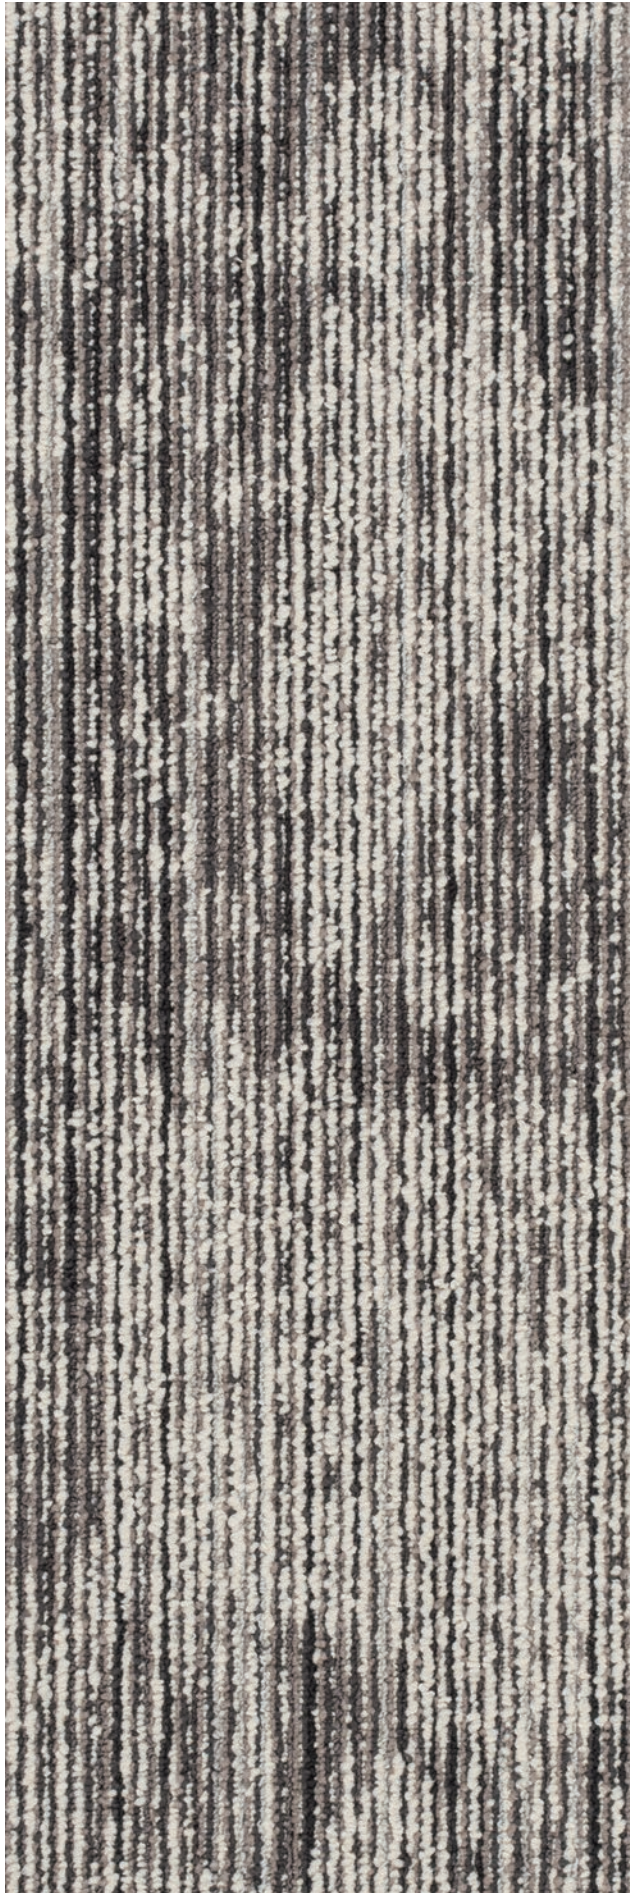


C00E0211-01

Ramin



C00E0211-02

Silver Oak

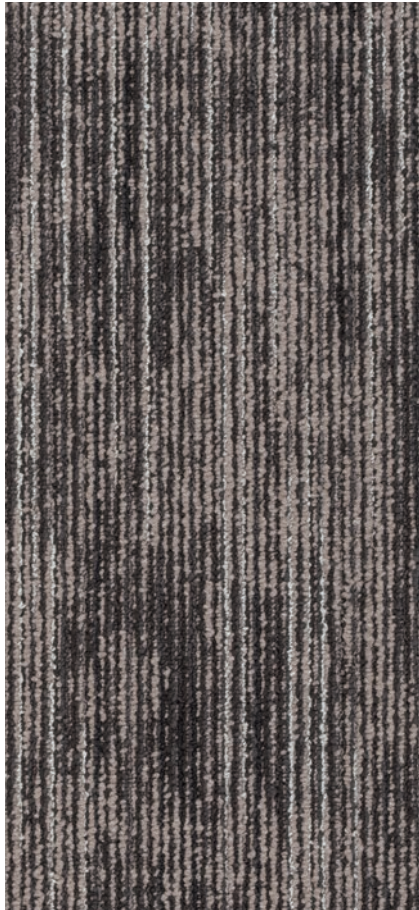


C00E0211-03

Mesua ferrea



C00E0211-04

Rosewood

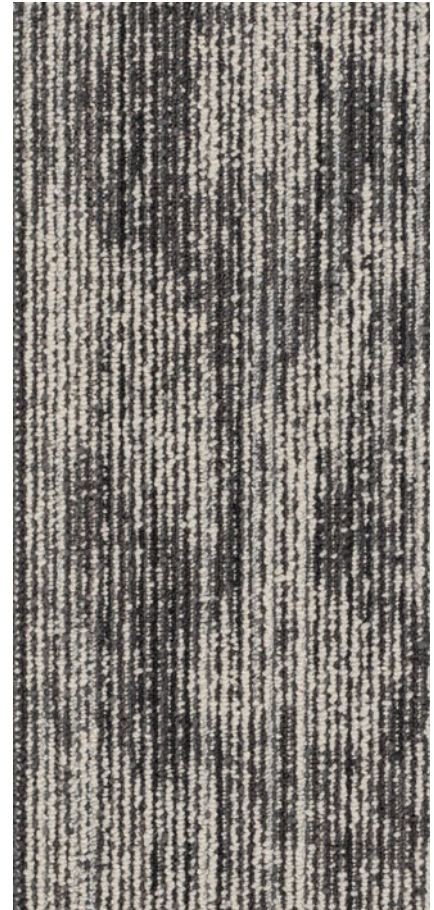

C00E0211-05

Padauk




C00E0211-06

Phoebe



C00E0211-07

Narra

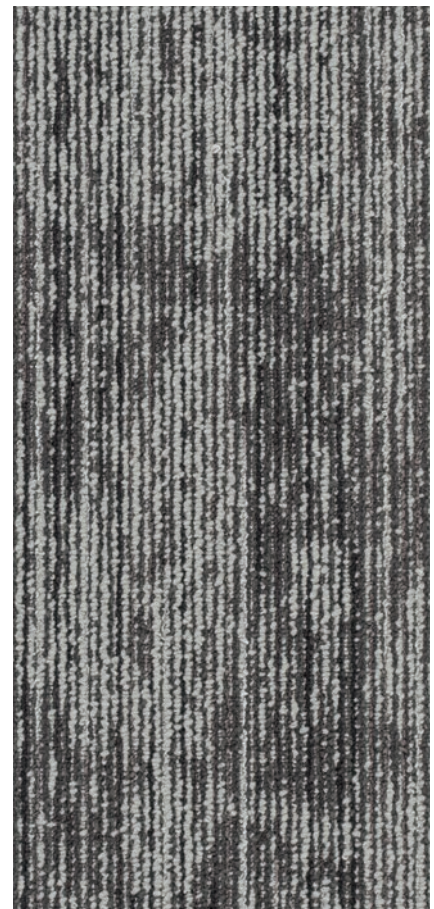

C00E0211-08

Olea Europea



C00E0211-06 Phoebe




C00E0211-01 Ramin




C00E0211-08 Olea Europea


Recommended installation methods



Ashlar



Herringbone



Basketweave

Technical Data

Product Specification	Description	Tolerance
Construction	Multi-level Loop	—
Yarn type	Nylon6	—
Dye Method	78% Solution dyed & 22% Space dyed	—
Gauge (/inch)	1/12	±5%
Yarn Weight (oz/yd ²)	22	±0.5
Average Pile Thickness (mm)	4.5	±0.5
Total Thickness (mm)	7	±0.1%
Product Size (mm)	250*1000	±5%

www.armstrongflooring.asia

ARMSTRONG FLOORING OFFICES:

	TEL:	FAX:
Hong Kong	(852)2585 7800	(852)2598 7181
Singapore	(65)6604 6836	(65)6604 6835
Malaysia	(60)379 323 331	(60)379 606 331
Indonesia	(62)21 2965 7866	(62)21 2965 7867

All trademarks owned by AWI Licensing Company

