



FILTRATION | FILTRATION@JOHNBROOKS.CA



HDY Series Filter Cartridges

Melt Blown Filters

An economical, melt blown filter element that can be used in a wide range of applications. The HDY depth filter is constructed of 100% polypropylene media for chemical compatibility with a variety of process fluids. The unique core prevents collapse even at elevated temperatures.

Product Specifications

Media: Polypropylene

End caps/Center Core: Polypropylene

Micron rating:

1, 3, 5, 10, 20, 30, 50, 75 µm

Dimensions

Nominal lengths:

9.75" 10" 20" 30" 40"
24.8 25.4 50.8 76.2 101.6 cm
(Other lengths available)

Outside diameter: 2.5" (6.35 cm),
2.63" (6.7 cm) End capped

Inside diameter: 1.1" (2.79 cm)


Operating Parameters

Maximum differential pressure:


65 psid @ 68°F (4.5 bar @ 20°C)
50 psid @ 100°F (3.4 bar @ 38°C)
25 psid @ 170°F (1.7 bar @ 77°C)

Recommended change-out pressure:


35 psid (2.4 bar)




Outer prefilter zone



Inner prefilter zone



Final pre-filter zone



Final filtration zone

FEATURES & BENEFITS

- Available in nominal ratings from 1 to 75 microns
- Formed Core for excellent collapse strength
- Graded pore construction for long on-stream life
- Melt blown media resists dirt unloading as differential pressure increases
- Non-shedding
- High dirt holding capacity
- Economical depth filtration
- Free of binders, adhesives and surfactants
- Highly consistent performance

CERTIFICATIONS

- USP Class VI: Meets USP Class VI Biological Test for Plastics
- FDA Listed Materials: All materials comply with FDA Title 21 of the Code of Federal Regulations Sections 174.5, and 177.1520, as applicable for food and beverage contact.
- NSF 61: Certified to NSF/ANSI STD 61 for materials requirements only — Component
- European Directive for Direct Food Contact: European Regulation No. 1935/2004 and European Regulation 10/2011: Tested for migration behavior and is suitable for contact with all kinds of foodstuffs with minimal rinse-up. Data available upon request.

TYPICAL APPLICATIONS


- RO Prefilters
- Wastewater
- Food and beverages
- Chemicals
- Blowdown post filter
- Radwaste
- Aqueous solutions
- Inks

HDY NOMENCLATURE INFORMATION

Filter Type	Retention Rating (microns)		Nominal Length (inches)		End Configuration	Gasket or O-Ring
	1	20	-5	-29.25		
HDY Series	3	30	-9.75	-30	N None (Cut Ends)	N None
	5	50	-10	-39		
	10	75	-19.5	-40		
			-20			
Example: HDY 10-20NN						
HDY	10		-20		N	N

HDY FLOW RATE

**Typical Flow Rate Clean Water at Ambient Temperature
(per 10" cartridge)**

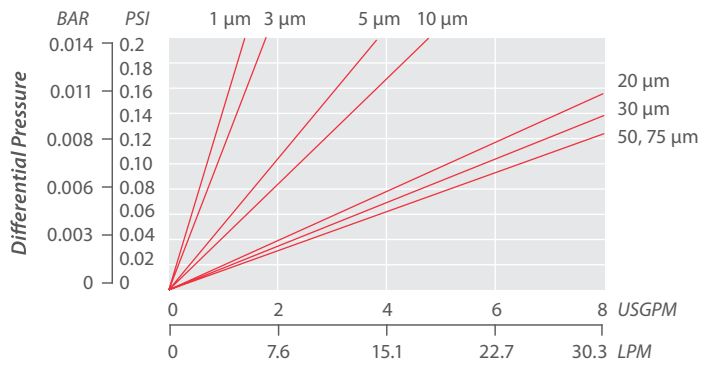

For liquids other than water, multiply pressure drop by the fluid viscosity in centipoise



Certified to
 NSF/ANSI Standard 61 for
 materials requirements only.
COMPONENT



1-877-624-5757
www.johnbrooks.ca