



EMAIL: FILTRATION@JOHNBROOKS.CA

HMC Series Filter Cartridges

*100% integrity tested to ensure
performance standards*

Product Specifications

Media: PTFE Membrane

Inner core, end caps, cage: PFA

Support layers:

FEP, Expanded PTFE

Gaskets/O-Rings:

Chemraz[®], Kalrez[®],
Teflon Encapsulated Viton

Micron ratings:

0.05, 0.1, 0.2, 0.45, 1 μ m

Dimensions

Nominal lengths:

10" 20" 30" 40"
25.4 50.8 76.2 101.6 cm

Outside diameter: 2.7" (6.9 cm)

Inside diameter: 1.0" (2.54 cm)

Surface area:

7.9 ft² (0.71 m²) per 10-inch

Operating Parameters

Maximum differential pressure:

80 psid (5.5 bar) @ 24°C (75°F)
55 psid (3.8 bar) @ 75°C (167°F)
30 psid (2.0 bar) @ 125°C (257°F)
15 psid (1.0 bar) @ 150°C (300°F)

Maximum reverse pressure:

50 psid (3.4 bar) @ 24°C (75°F)
15 psid (1.0 bar) @ 121°C (250°F)

ALL-FLUOROPOLYMER CARTRIDGE FILTERS FOR AGGRESSIVE APPLICATIONS

HART HMC pleated membrane cartridges feature a PTFE membrane and PFA structural components to provide excellent chemical and temperature resistance for aggressive chemical applications such as etchers, strippers, cleaners and bulk chemicals. The all-fluoropolymer construction provides for the highest level of fluid purity and will exhibit rapid rinse-up to 18 M Ω -cm resistivity and single digit ppb levels of TOC. HART HMC cartridges are produced and manufactured in an ISO cleanroom and are 100% integrity tested to ensure performance standards.

FEATURES & BENEFITS


- Manufactured, flushed, tested and packaged in an ISO Class 7 Cleanroom Environment
- Filters are flushed with 18 M Ω -cm DI water to ensure low extractables and low particle shedding
- 100% integrity tested to provide reliable performance
- Resistivity rinse-up to 18 M Ω -cm and single digit ppb TOC levels with minimal throughput
- Pore size ratings from 0.05 to 1 micron to meet a broad range of applications
- Wet-Pack option available to eliminate the requirement for solvent pre-wetting in aqueous applications

HMC NOMENCLATURE INFORMATION

Filter Type	Retention Rating (microns)	Nominal Length (inches)	End Configuration	Gasket or O-Ring	Option
HMC Series Filters	0.05	0.45	P3 222/Flat Single Open End	C Chemraz	-W Pre-Wet
	0.1	1		K Kalrez	
	0.2			T Teflon encap.	
				Viton (Standard)	
Example: HMC 0.05-20P3T-W					
HMC	0.05	-20	P3	T	-W

HMC FLOW RATE

Typical Flow Rate Clean Water at Ambient Temperature
(per 10" cartridge)

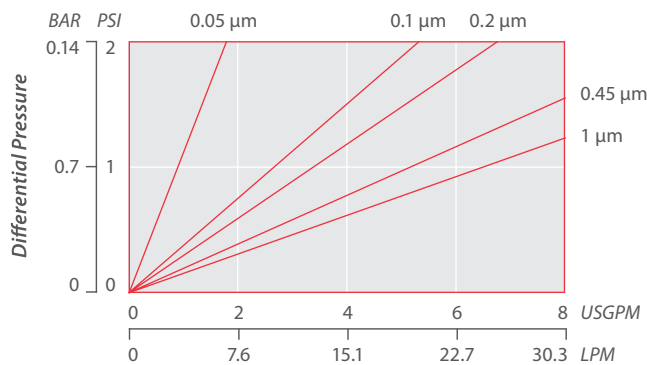

RINSE-UP VOLUMES

Resistivity rinse-up to 18 MΩ-cm	< 5 liters
Particle cleanliness	< 10 particles/mL > 0.1 µm
Extractable levels	< 25 ppb total in 5% HCl

INTEGRITY TEST SPECIFICATIONS

Maximum Diffusive Air Flow (per 10-inch cartridge) values for HMC filters wet with 60/40 IPA/water

Pore Size	Specification
0.05 µm	≤ 90 cc/min @ 22 psig (1.5 bar)
0.1 µm	≤ 50 cc/min @ 18 psig (1.2 bar)
0.2 µm	≤ 50 cc/min @ 12 psig (0.8 bar)
0.45 µm	≤ 50 cc/min @ 5 psig (0.34 bar)
1 µm	≤ 50 cc/min @ 3 psig (0.2 bar)



**SPRAYING
PUMPING
FILTERING
AND VALVES**

1-877-624-5757
www.johnbrooks.ca