

Alarm Station

Contents

[Last viewed page](#)

2

[Next page](#)

Interface overview	3
Acknowledging and Reviewing Events	4
Menu Events	5

Interface Overview


[Back to contents](#)

[Last viewed page](#)

3

[Previous page](#)

[Next page](#)

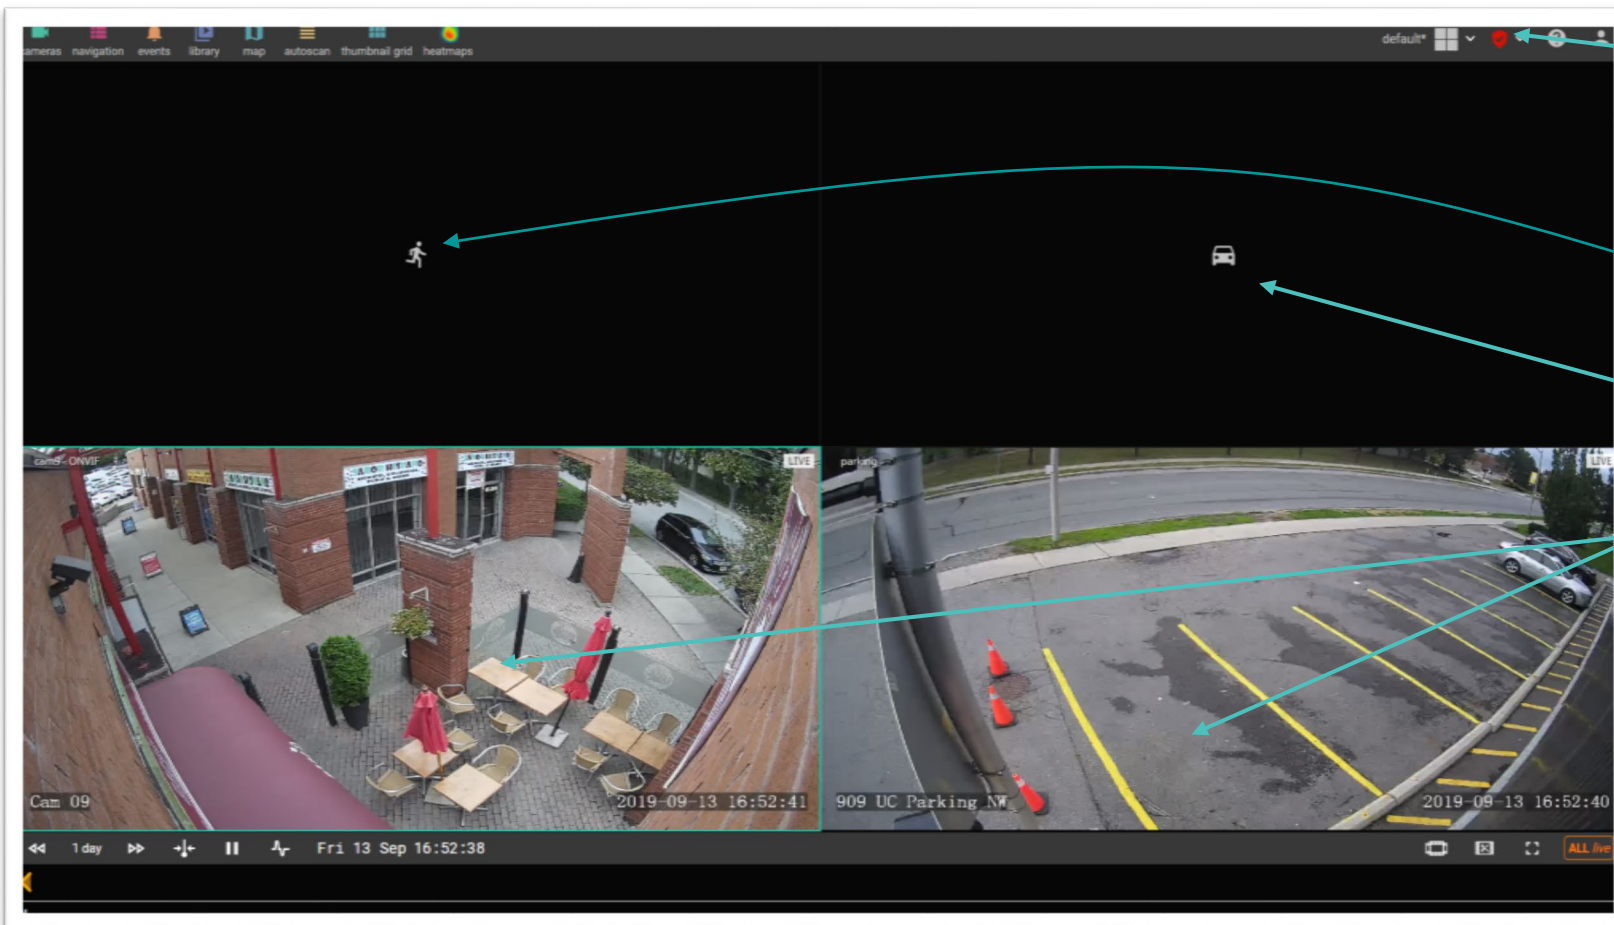

Armed/Disarmed button and indication. Red shield system is armed (events will be shown), empty shield means that system is disarmed (no events will be shown).

In this image panel only events in which a person was detected will be shown.

In this image cell only events in which a car was detected will be shown.

To start receiving basic motion based events close at least one of these cameras. You need to have at least one empty image cell to start receiving basic motion alerts.

Note: smart object events will be shown over active cameras in cells 1 and 2, while simple motion based events require empty cell to start appearing and will be shown in any of the cells except cells 1 and 2.

Acknowledging and Reviewing Events


[Back to contents](#)

[Last viewed page](#)

4

[Previous page](#)

[Next page](#)

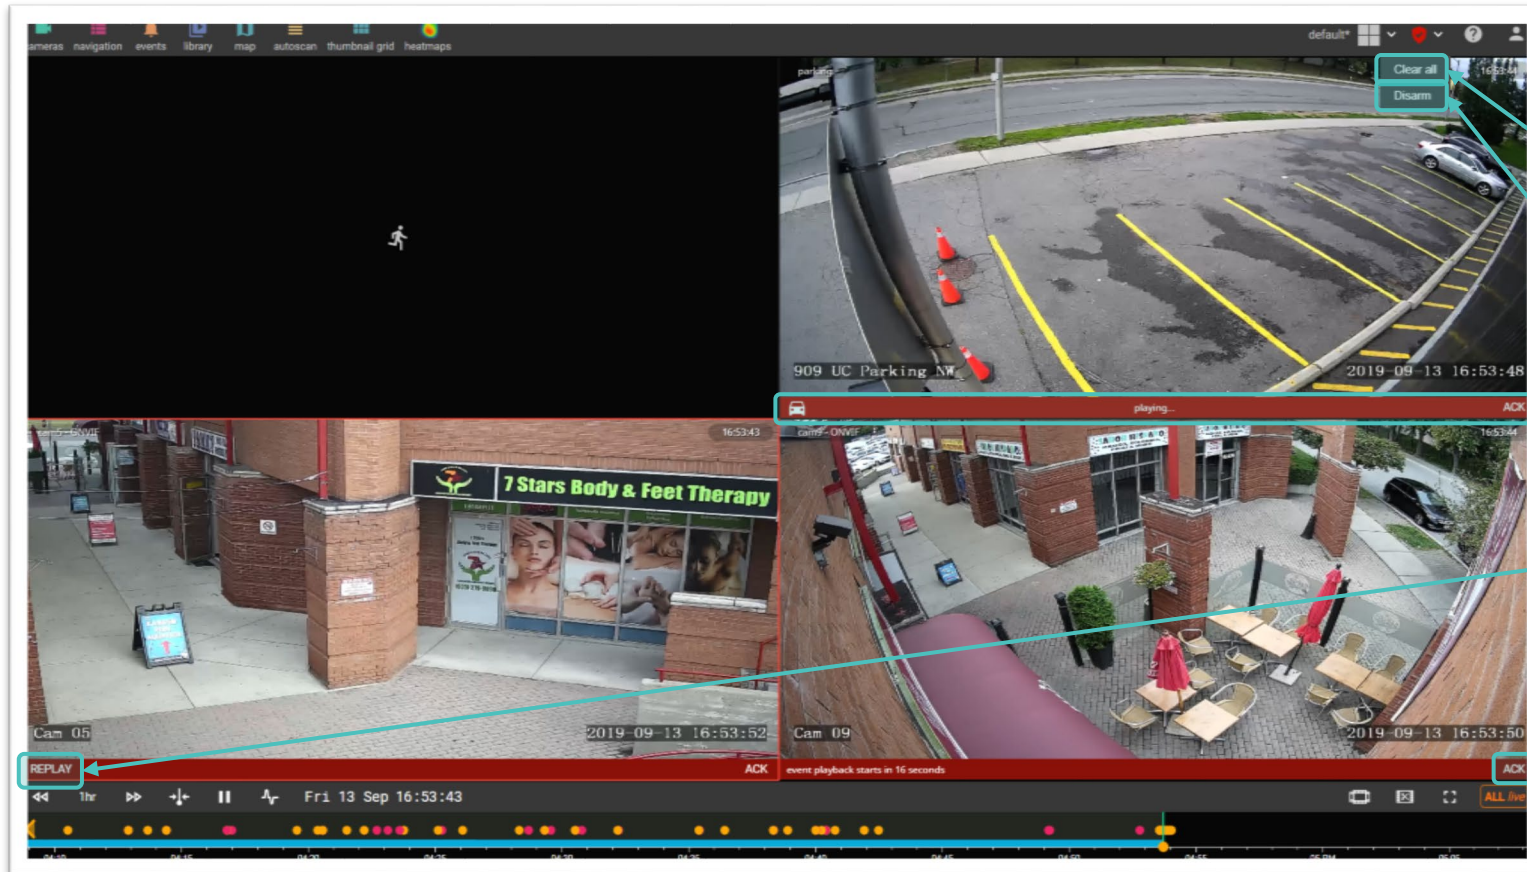

Click on Armed button  to open dropdown menu:

• Clear all will acknowledge all events and clear all image cells leaving system armed.

• Disarm will stop monitoring of events.

• Red status bar will appear under camera showing details about playback position.

• After event playback is finished a REPLAY button will appear, click on it to start event playback from the beginning.

• Click ACK to acknowledge the event and close current camera to prepare image cell to show new events.

Note: if the event is not acknowledge the stream from the camera will continue until new event is detected. After all image cells are filled with active cameras new events will replace the oldest events.

