



TU-480 SERIES BLOCKS

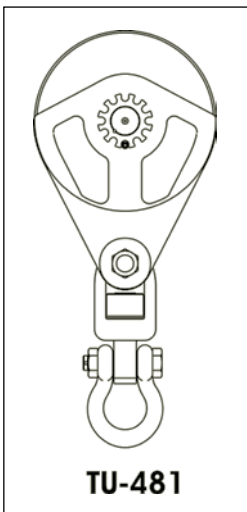

- Wide Range of Sizes Available:
- 30 and 60 Ton Capacity
- 1" to 2-1/4" Wire Line Size
- 16" to 24" Sheave Diameter
- Larger Capacity Blocks available.
- Multiple Configurations Available:
- Swivel Hook
- Swivel Shackle
- Tailboard
- Upset Shackle
- Fixed Shackle
- McKissick Roll-Forged Sheaves:
- Flame Hardened Grooves
- 30 Ton furnished with Roller Bearings
- 60 Ton furnished with Tapered Roller Bearings with seals
- All sizes are RFID EQUIPPED.
- Meets or exceeds all requirements of ASME B30.26 including identification, ductility, design factor, proof load and temperature requirements. Importantly, these blocks meet other critical performance requirements including fatigue life, impact properties and material traceability, not addressed by ASME B30.26.

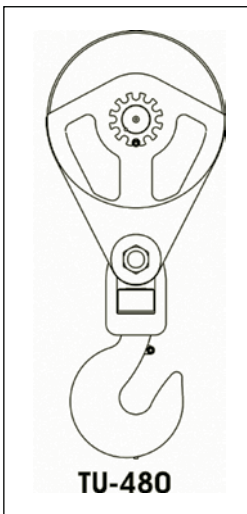

TU-480 / TU-481 High Capacity Snatch Blocks for Tilt-Up Wall Construction

Working Load Limit (Tons)*	Sheave Diameter (in.)	Wire Line Size (in.)	With Swivel Hook		With Swivel Shackle	
			TU-480 Stock No.	TU-480 Weight Each (lbs.)	TU-481 Stock No.	TU-481 Weight Each (lbs.)
30	16"	1"	2108300	225	2108303	235
30	16"	1-1/8"	2108312	225	2108315	235
30	16"	1-1/4"	2108324	225	2108327	235
30	16"	1-3/8"	2108336	225	2108339	235
30	16"	1-1/2"	2108348	225	2108351	235
30	20"	1"	2108360	240	2108363	250
30	20"	1-1/8"	2108372	240	2108375	250
30	20"	1-1/4"	2108384	240	2108387	250
30	20"	1-3/8"	2108396	240	2108399	250
30	20"	1-1/2"	2108408	240	2108411	250
60	18"	1"	2108420	390	2108423	390
60	18"	1-1/8"	2108435	390	2108438	390
60	18"	1-1/4"	2108450	390	2108453	390
60	18"	1-3/8"	2108465	390	2108468	390
60	18"	1-1/2"	2108480	390	2108483	390
60	24"	1"	2108495	450	2108498	450
60	24"	1-1/8"	2108510	450	2108513	450
60	24"	1-1/4"	2108525	450	2108528	450
60	24"	1-3/8"	2108540	450	2108543	450
60	24"	1-1/2"	2108555	450	2108558	450
60	24"	1-5/8"	2108570	450	2108573	450
60	24"	1-3/4"	2108585	450	2108588	450
60	24"	1-7/8"	2108600	450	2108603	450
60	24"	2"	2108615	450	2108618	450
60	24"	2-1/4"	2108630	450	2108633	450

* Ultimate Load is 4 times the Working Load Limit.
Contact our Specials Sales Department for blocks up to 350 Tons.

BLOCKS & SHEAVES