


Rex-Cut Abrasives Type 1 Deburring Wheels

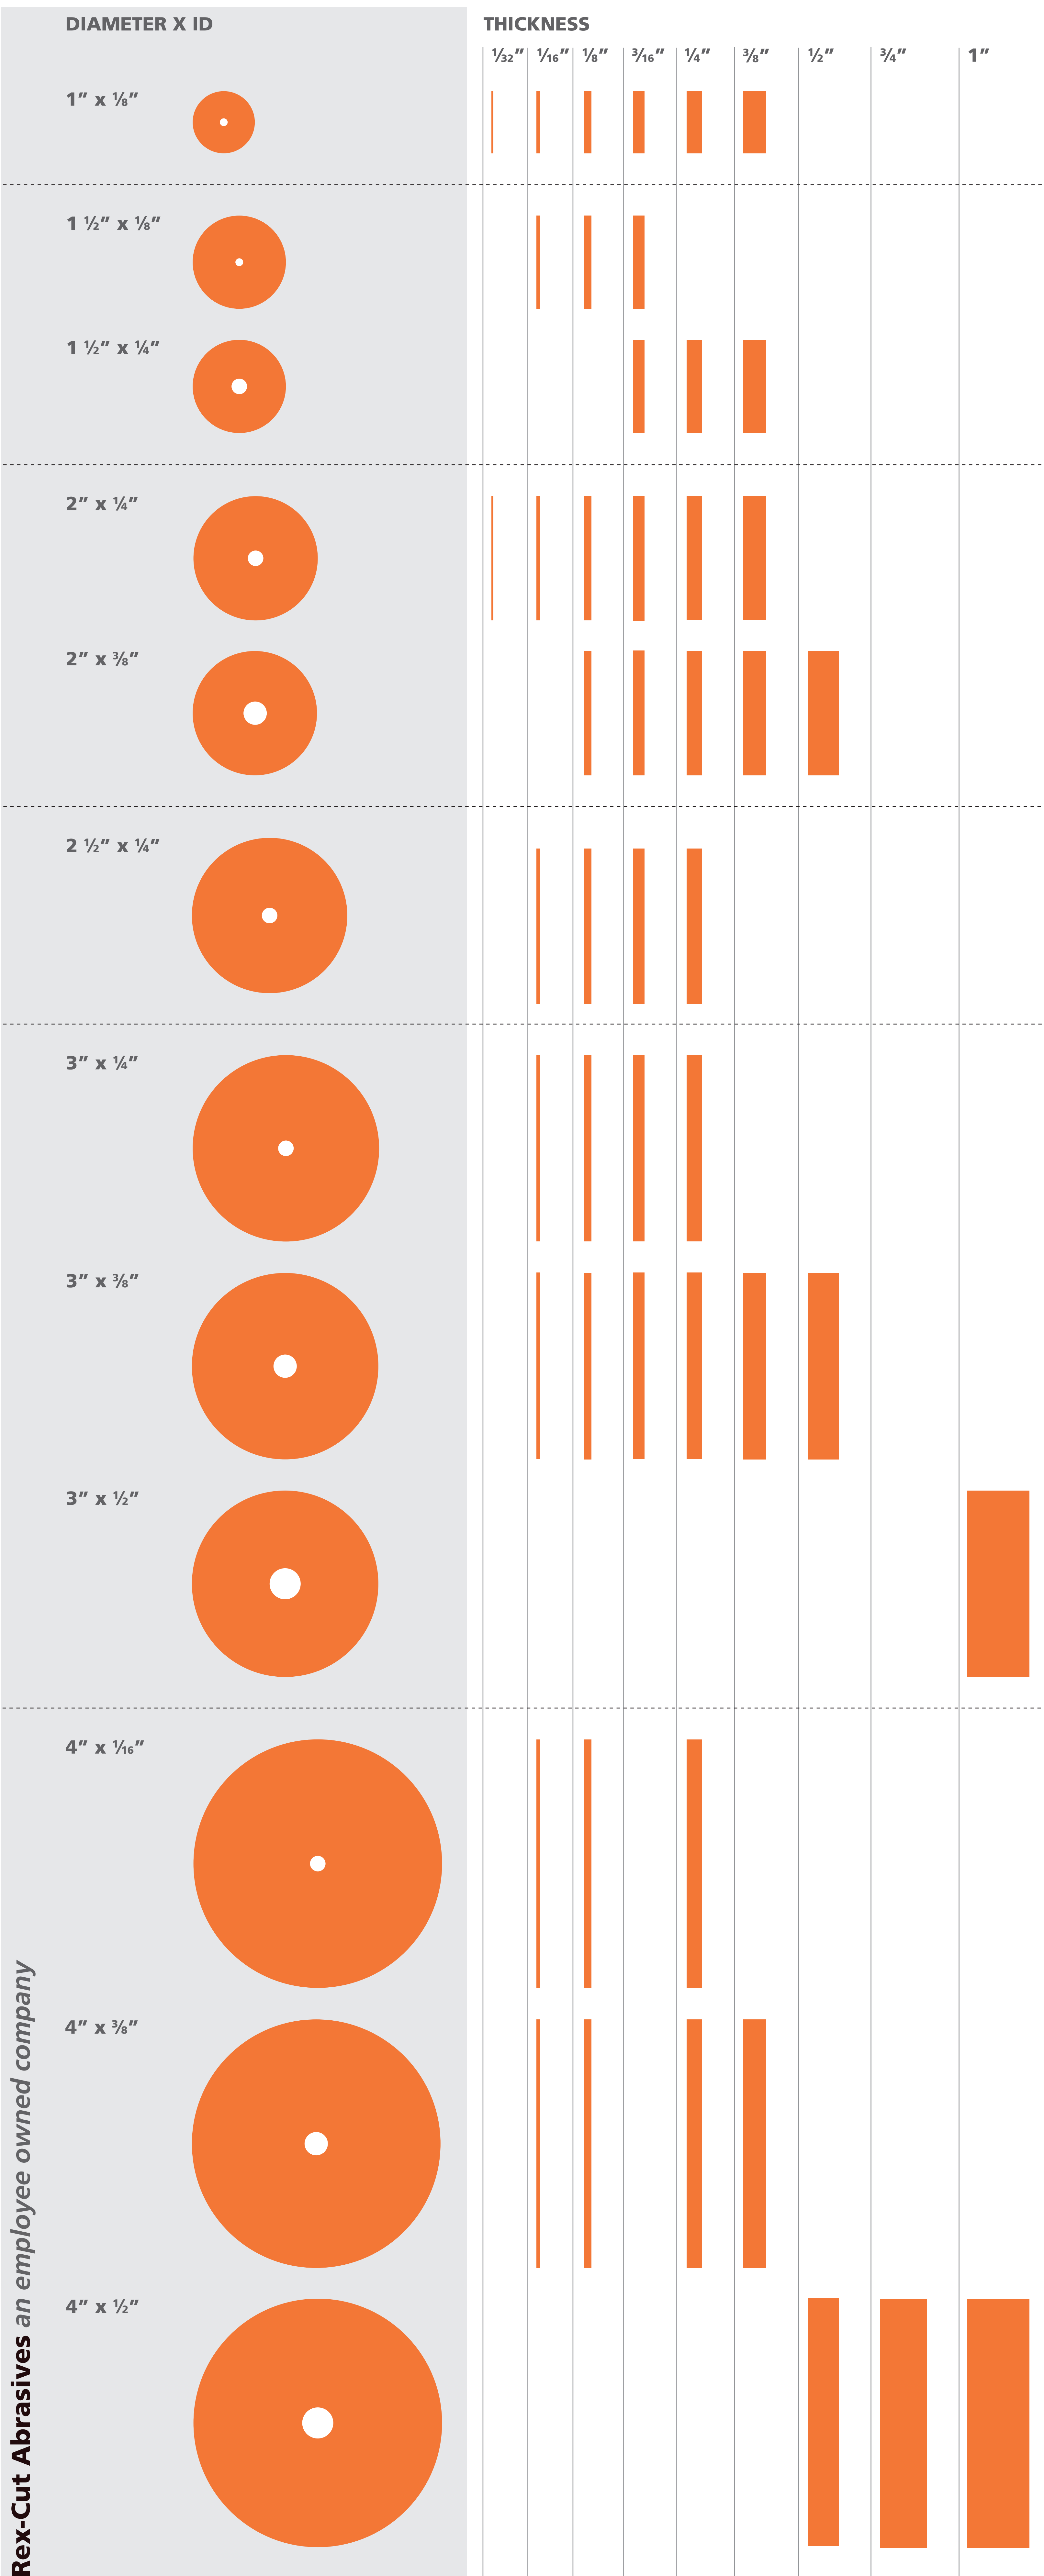

MAXIMUM OPERATING SPEED (RPM)

DIAMETER x THICKNESS x ID		MAX RPM		
inch	mm	GFX	JTX & MTX	High Speed
1 x 1/32 x 1/8	25 x .8 x 3	NA*	54,240	--
1 x 1/16 x 1/8	25 x 1.6 x 3	36,290	54,240	--
1 x 1/8 x 1/8	25 x 3 x 3	36,290	54,240	--
1 x 1/4 x 1/8	25 x 6 x 3	36,290	54,240	--
1 x 3/8 x 1/8	25 x 10 x 3	36,290	54,240	--
1-1/2 x 1/16 x 1/8	38 x 1.6 x 3	24,195	36,160	--
1-1/2 x 1/8 x 1/8	38 x 3 x 3	24,195	36,160	--
1-1/2 x 1/4 x 1/4	38 x 6 x 6	24,195	36,160	--
1-1/2 x 3/8 x 1/4	38 x 10 x 6	24,195	36,160	--
2 x 1/32 x 1/4	50 x .8 x 6	NA*	27,120	--
2 x 1/16 x 1/4	50 x 1.6 x 6	18,145	27,120	28,000
2 x 1/8 x 1/4	50 x 3 x 6	18,145	27,120	28,000
2 x 1/8 x 3/8	50 x 3 x 10	18,145	27,120	--
2 x 1/4 x 1/4	50 x 6 x 6	18,145	27,120	28,000
2 x 1/4 x 3/8	50 x 6 x 10	18,145	27,120	--
2 x 3/8 x 1/4	50 x 10 x 6	18,145	27,120	--
2 x 3/8 x 3/8	50 x 10 x 10	18,145	27,120	--
2 x 1/2 x 3/8	50 x 13 x 10	18,145	27,120	--
2-1/2 x 1/16 x 1/4	65 x 1.6 x 6	14,515	21,695	24,000
2-1/2 x 1/8 x 1/4	65 x 3 x 6	14,515	21,695	24,000
2-1/2 x 1/4 x 1/4	65 x 6 x 6	14,515	21,695	24,000
3 x 1/16 x 1/4	75 x 1.6 x 6	12,095	18,080	20,000
3 x 1/16 x 3/8	75 x 1.6 x 10	12,095	18,080	--
3 x 1/8 x 1/4	75 x 3 x 6	12,095	18,080	20,000
3 x 1/8 x 3/8	75 x 3 x 10	12,095	18,080	--
3 x 3/16 x 1/4	75 x 5 x 6	12,095	18,080	--
3 x 3/16 x 3/8	75 x 5 x 10	12,095	18,080	--
3 x 1/4 x 1/4	75 x 6 x 6	12,095	18,080	20,000
3 x 1/4 x 3/8	75 x 6 x 10	12,095	18,080	--
3 x 3/8 x 3/8	75 x 10 x 10	12,095	18,080	--
3 x 1/2 x 3/8	75 x 13 x 10	12,095	18,080	--
3 x 1 x 1/2	75 x 25 x 13	12,095	12,095	--
4 x 1/16 x 1/4	100 x 1.6 x 6	9,075	13,560	--
4 x 1/16 x 3/8	100 x 1.6 x 10	9,075	13,560	--
4 x 1/8 x 1/4	100 x 3 x 6	9,075	13,560	--
4 x 1/8 x 3/8	100 x 3 x 10	9,075	13,560	--
4 x 1/4 x 1/4	100 x 6 x 6	9,075	13,560	--
4 x 1/4 x 3/8	100 x 6 x 10	9,075	13,560	--
4 x 3/8 x 3/8	100 x 10 x 10	9,075	13,560	--
4 x 1/2 x 1/2	100 x 13 x 13	9,075	13,560	--
4 x 3/4 x 1/2	100 x 19 x 13	9,075	9,075	--
4 x 1 x 1/2	100 x 25 x 13	9,075	9,075	--

* Not available in GFX bond
Higher speed ratings may be available upon request

Cotton-Fiber Abrasives
Cotton abrasive products are used for a variety of applications requiring medium to light metal removal, deburring, and finishing. Constantly reveal fresh abrasive grain as they work and can debur and finish in one-step.

GFX
Flexible synthetic latex bond for light deburring, blending, and finishing without changing part geometry

JTX
Medium resin bond for light deburring, long life

MTX
Hard resin bond for light to medium stock removal, long life

For more information on mounted points or any Rex-Cut Abrasives product, please contact your local representative, visit www.rexcut.com, email info@rexcut.com, or call customer service at 800-225-8182.



Improve Your Daily Grind