

REEL-ALK38200

360 DEGREE PIVOT HOSE REEL

SPECIFICATION


- 200 ft 3/8" Hose Capacity
- 1/2" NPT - F Inlet/Outlet
Includes (2) 3/8" reducer fittings
- 360° Swivel Rotation
- 5,000 PSI SS Swivel
- 250° F Max Temp

FEATURES / BENEFITS

- Direct hand-crank rewind with locking pin
- Solid steel construction
- Durable powdercoated finish
- 360° swivel rotation
- Robust folding handle
- 180° pivoting hose guide
- Adjustable friction lever brake
- Full flow high pressure stainless steel swivels
- Coupler connection to secure hose when not in use.




Dimensions (inches[mm])

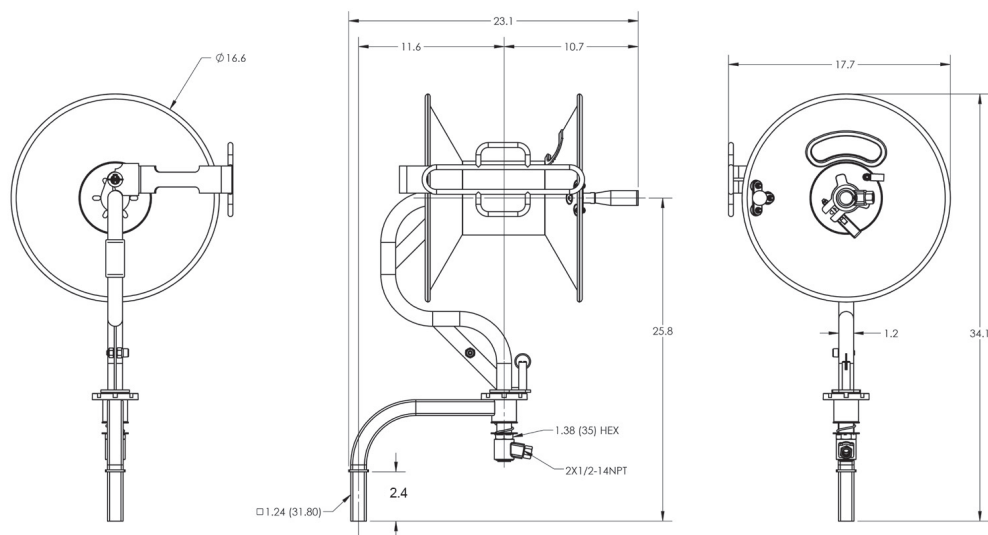

Parts List

Item No.	Description	Qty.
1	Brake kit, 30mm	1
2	SS Swivel 10° offset, M22X1/2NPT-F, 5000 PSI	2
3	Arm kit, Lower	1
4	SS Snap Ring, 16	1
5	Guide, Hose	1
6	Clamp, Hose	1
7	Washer, M6	2
8	Nut, Nylok, M6	2
9	Bushing	2
10	Washer	4
11	Handle Kit, 30 Degrees	1
12	Assy, Flange	1
13	Guard, Hose	1
14	Spring	1
15	Arm Kit, Upper	1
16	Washer, M16	1
17	Washer, 53X23X2	1
18	Fitting, 1/2 NPT-MX 3/8 NPT-F	2
19	Flange Nut, M6, SS	1
20	Label, Caution Surface May be Hot	1

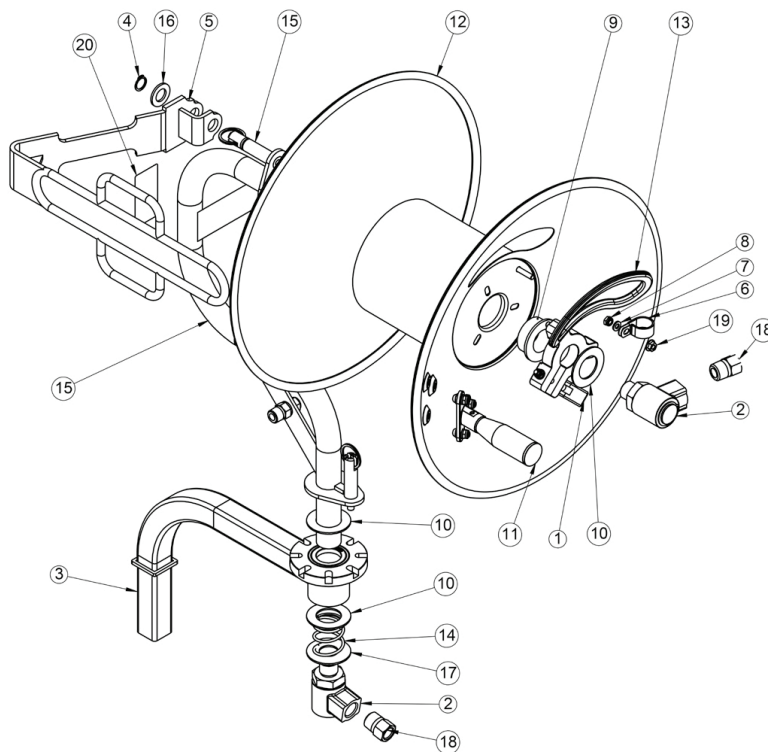

Alkota Cleaning Systems Inc.
Alcester, South Dakota 57001

For more information call:
(800) 255-6823 / (605) 934-2222 or
Fax: (800) 325-5682 / (605) 934-1808
Web Access: www.alkota.com

CERTIFICATIONS



© 2020 Alkota Cleaning Systems
Specifications subject to change without notice
Printed in U.S.A. / Form #:FWS-2-21

Distributed by:

