



## TECHNICAL SPECIFICATIONS

Product Name	Product Number	Wire Size (mm)		WFS (m/min)	Weight (kg)	Dimensions HxWxD (mm)	Burn-back	Digital V/A Meters	Pre setting	Run in.	Hot / soft arc	Memory/ Synergic
		Solid	Cored									
LF33	K14030-1W	0.8-1.6	1.2-1.6	1.0-20	Solid 0.8 – 1.6 mm Alum 1.2 – 1.6 mm FCAW 1.2 – 1.6 mm	440x270x636	✓	✓	WFS	✓	✓	✓

## A CLOSER LOOK

### READY TO GO

Roll out the machine quickly and easily and get welding in minutes.

Power Plus package:

- LINC Gun® 360G
- LF33 wire feeder
- work return lead 10m
- drive rolls
- flowmeter
- 3m primary lead
- 10m control cable and gas hose
- swivel platform



### PROFESSIONAL FEATURES


Enclosed Wire Feeder Design: keeps wire clean allowing better welding.

Infinitely Variable Remote Voltage Selection: fine tune to your exact requirements.

Gas Purge: allows for checking gas flow with the ability to purge the gas line.

Cold Wire Inch: allows the wire to be fed without using gas.

Four-roll Drive Roll System: provides more positive wire feeding and prevents bird-nesting.

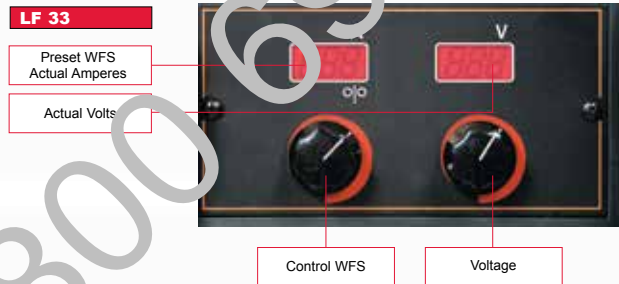

### READY FOR CONVENIENCE AND RELIABILITY

Swivel platform allows for 360 degree rotation of the wire feeder when mounted on the power source.

Two clear digital meter displays for Welding voltage and Amperage / wire feed speed.

LF-33 factory fitted undercarrage gives greater mobility when using the feeder away from the power source.

### READY FOR SIMPLICITY

Simple, easy-to-use controls – no complicated menu systems.

Roll-on/roll-off cylinder trolley.

No hassle, tool-less design wire drive system that is both 5 and 15 kg spool compatible.

Infinitely variable voltage selection gives greater control of the arc across the welding range.

