

# Nitto Kohki's

## Portable Electric Beveling Tool

# HAND BEVELER

## Model HB-15B

### Features

- Ideal for beveling up to 15C before welding
- Uses easily-replaceable super-solid cutting inserts
- An insert has four blades for good economy
- Fine finished surface needs no extra sanding
- No damage to work from heat-hardening or oxidation
- Optional attachment for column R-section chamfering

### Specifications

- Rated Voltage (Single phase) : AC 230V or 115V
- Rated Ampere : 4.0A / 10.5A
- Chamfering Capacity : 0 to 15C  
(on JIS SS400 or equivalent)
- Chamfer Angle : 15 to 45°
- Rated Revolutions : 2,750 r.p.m. / 3,350 r.p.m.
- Weight : 15kg (33 lbs)

### Standard Accessories

- Hex. Wrench Key 4, 5, 6 mm
- Spanner 24 x 27
- Hook Spanner 25 ~ 28
- T Wrench Key 3 mm
- TA9A093 Insert 12.7 sq., 12 pcs. / set

### Optional Accessory


- TA9A728 Pipe Plate Ass'y for O.D. 125 mm to 800 mm
- HB -15B can be used for the outer diameter beveling with the Pipe Plate Ass'y

### Applications

- Bevels large workpieces efficiently - Dies, Machines, Structural members (wide-flange beams, I-beams, etc. ), Mild steel and Cast iron parts.



### ● Chamfering capacity




Max.15C

## HAND BEVELER Model HB-15B



Beveling steel plates

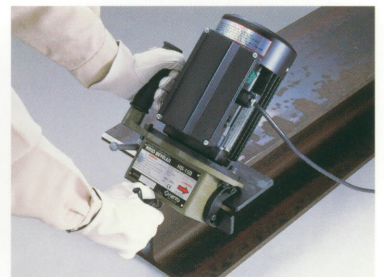

Beveling I - beams

Distributed by :



**NITTO KOHKI CO., LTD.**  
9-4, Nakaikegami 2-chome,  
Ohta-ku, Tokyo 146-8555 Japan  
Phone : 03(3755)1111 Fax : 03(3753)8791