

GRAND CAYMAN RANGE

Technical Specifications



The GRAND CAYMAN RANGE

is our latest innovation which is DOE approved. It was developed from the ground up to incorporate Novums LEAP technology. The benefits of which are clear - No frost build up internally unique cassette refrigeration system & the lowest running costs of any cabinet of its size on the market.

The Grand Cayman combines superior internal volume, with excellent product visibility & product facing. Dual LED lighting, combined with a clean white interior provides spectacular illumination of the product. This combined with Novum's LEAP Technology, makes a truly class leading cabinet.



**Removable
Cassette**



**DOE
approved**



***37%
Lower
Energy Bills**



**100%
Frost Free**

*when compared to next best in class competitor




The unique curved glass on the end case offers an unequalled access into the cabinet. In practice, this means that the front corner of the cabinet can easily be shopped. The Novum Grand Cayman range is guaranteed to enhance the image of your store, save you money and improve your customer shopping experience.

It is a versatile cabinet that can be used as a stand alone unit, as part of a line-up, back to back or as part of a full island and is available with sliding lids.


Technical Specification

Grand Cayman Range	Model	In-Line	End of Aisle
Technical Data			
Gross content	cu. ft.	37.7	34.24
Net Content	cu. ft.	25.7	25.7
Total Display Area (TDA)	sq. ft.	16.7	16.1
Classification		3L1	3L1
Ambient Temperature Range	°F	+61 to +77	+61 to +77
Inner Temperature Range	°F	0 to -13	0 to -13
Sound Pressure at 1m Distance	dB(A)	43.3	43.3
Electrical Data			
Nominal Voltage / Frequency	V / Hz	110-120 / 60	110-120 / 60
Nominal Power Cabinet	w	310	310
Nominal Power LED Light	w	38 (2 x 19)	38 (2 x 19)
Nominal Current	A	5	5
Fuse Protection	A	10	10
Energy consumption (at 77°F) to DOE 8.1	kWh/24h	4.15	4.15
Length of Power Supply Cord	inches	78.7	78.7
Refrigeration Data			
Refrigerant	Type	R290	R290
Gas Charge	oz	2.3	2.3
Maximum Operating Pressure	PSI	435	435
Maximum Heat Output	W/h (Btu/h)	780	780 (2661)
Dimensions			
Length Outside/ Inside	inches	83 / 75.8	83 / 75.8
Depth Outside/ Inside	inches	38.5 / 31.6	38.5 / 31.6
Front Access Height Outside / Inside	inches	31 / 34.8	31 / 34.8
Stacking Height at the Front / Back	inches	22.8	22.8
Weight			
Net Weight (excl. packaging, incl. internal accessories)	lbs	330	330
Gross Weight (incl. packaging & internal accessories)	lbs	341	341

Dimensions End of Aisle

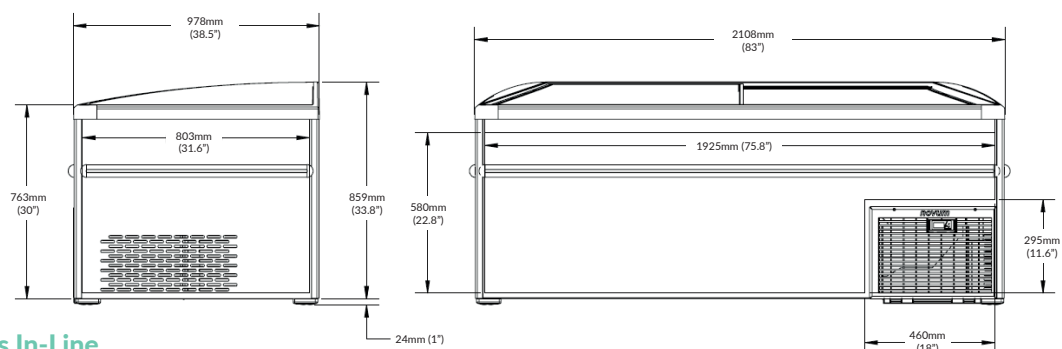

Dimensions In-Line

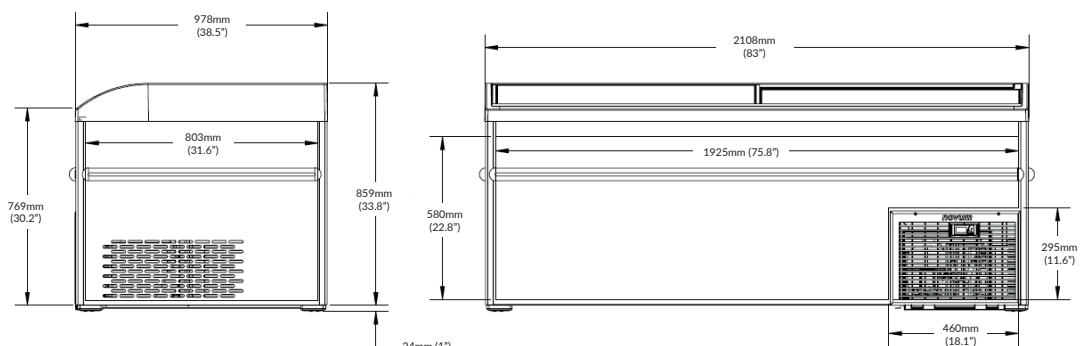

Note: Spot Promotion Walkaround also available (Alaskan)

Note: Patent pending

Professional HVAC/R Services, Inc.®

32961 Pin Oak Parkway
Avon Lake, Ohio 44012

Phone: 440-933-0033
www.prohvacr.com

NOVUM
Redefining refrigeration

